
This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0357110210

Status: Active

Description: 2.79mm (.110") Slip-In Tab, Quick Disconnect, 0.50mm (.020") Tab Thickness, Wire Range 16-20 AWG (1.31-0.52mm²), Post-Tin Plated

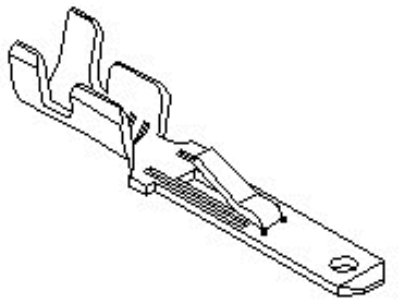

Series image - Reference only

Documents:

Drawing (PDF)
Product Specification PS-35711-001 (PDF)
Product Specification PS-35957-001 (PDF)
RoHS Certificate of Compliance (PDF)

General

Product Family	Quick Disconnects
Series	35711
Crimp Quality Equipment	Yes
Product Name	Slip-On
Type	Quick Disconnect

Physical

Barrel Type	Open
Gender	Male
Glow-Wire Compliant	No
Insulation	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Orientation	Straight
Packaging Type	Reel
Plating min: Mating (µin)	40
Plating min: Mating (µm)	1
Plating min: Termination (µin)	40
Plating min: Termination (µm)	1
Polarized to Mating Part	No
Tab Thickness	0.51mm (.020")
Tab Width	2.79mm (.110")
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.50-3.20mm (.060-.125") max.
Wire Size AWG	16, 18, 20
Wire Size mm²	0.50 - 1.30

Electrical

Voltage - Maximum	Per Wire Specification

Material Info

Reference - Drawing Numbers

Product Specification	PS-35711-001, PS-35957-001
Sales Drawing	SD-35711-02*0

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free Status
Halogen-Free

China RoHS

Need more information on product environmental compliance?


Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here


Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
35711Series


This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

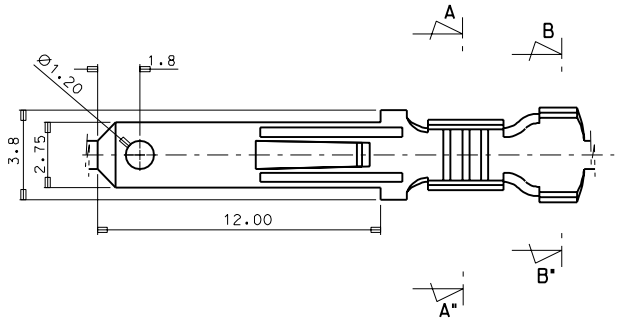




SECTION A-A"



SECTION B-B"

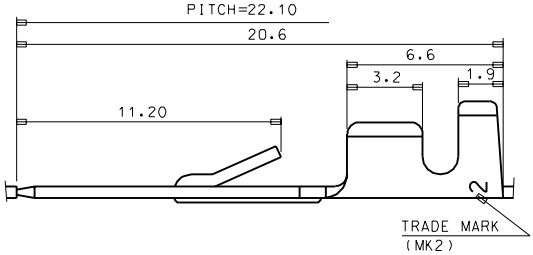

NOTES
1. MATERIAL:BRASS, Ø.5 THICKNESS
2. FINISH:35711-0200:UNPLATED
35711-0210:POST-TIN PLATED
3. RECOMMENDED LENGTH OF WIRE STRIP IS 4.5-5.Ømm

				ASS'Y PART		QTY/REEL OR PACK	SURFACE AREA	MATERIAL SEE NOTES	WIRE RANGE AWG: #20-#16	GENERAL TOLERANCES DIM. : ±0.30 ANGLE : ±0.20	MOLEX-KOREA CO.,LTD.
				DESCRIPTION	ENG.NO.	10,000 Q'TY/REEL	MM²	DIMENSION CLASSIFICATION ■▼: CRITICAL ☒ : MAJOR □ : MINOR ( ): REFERENCE	MM²: Ø.52-1.31		REVISE ONLY ON CAD SYSTEM
						DIE NO.	LAYOUT NO.		INSULATION RANGE Ø1.8-2.3	TITLE: .110 SLIP-IN TAB	1OF1
A	CAD REDRAWING RELEASED	93-016	93.7.22			WIRE CRIMP WIDTH	INS. CRIMP WIDTH	DRAWN BY W.Y.YANG	CHK'D BY B.K.CHOI		
LTR	REVISION RECORD	ECN	DR. CHK DATE	DIE FEED	APPL FEED 22.1	WBDW	IBDW	APP'D BY	SCALE 7:1	ENG.NO. SD 35711-02•0	REV A
											MK-9

DO NOT SCALE DRAWING
DIMENSION IN METRIC

ENG. NO. SD 35711-02•0
EDP NO.
SIMILAR ITEM
PROJECT NO.