




REV	DESCRIPTION	DWN	DATE	APPROVEN
A	FIRST ISSUE	Zelin.zhong	2022/01/18	John kine
B				

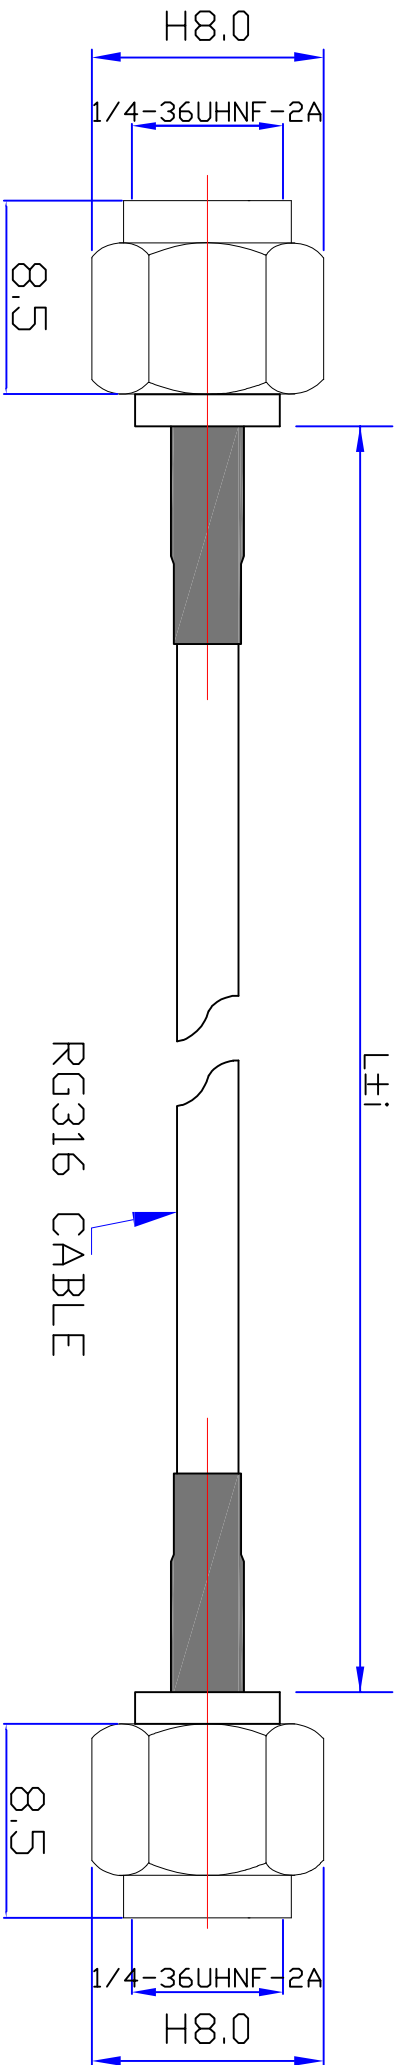

4 ELECTRICAL
 Frequency Range:
 VSWR (mated pair):
 Insertion Loss (connectors only):
 Rated voltage:
 Dielectric Withstand Voltage:
 Insulation Resistance:
 Contact Resistance (connectors only):

料号	尺寸(L) mm	公差(Δ) mm
DOSIN-811-0211A	200	8MM
DOSIN-811-0211B	300	8MM
DOSIN-811-0211C	400	10MM
DOSIN-811-0211D	1000	10MM
DOSIN-811-0211E	3600	15MM
DOSIN-811-0211F	4500	20MM
DOSIN-811-0211G	2500	12MM
DOSIN-811-0211H	600	10MM
DOSIN-811-0211I	500	10MM

5 MECHANICAL / ENVIRONMENTAL
 Durability:
 Disengagement Force:
 Center Contact Retention force:
 Tape/Reel Packaging (receptacle):
 Operating Temperature:

NOTE:
 DRAWN: Zelin.zhong 2022/01/18
 CHECKED:
 APPROVALS:
 TOLERANCE: UNLESS OTHERWISE SPECIFIED
 TOLERANCES: DIMENSIONS ARE 0.5-8MM ±0.020MM, 8-30MM ±0.40MM, 30-120MM ±0.50MM
 VIEW: UNIT: MM SCALE: 1:1
 NAME: SMA MALE TO SMA MALE FOR RG316 CABLE
 PRODUCT NO: DOSIN-811-0211
 SHEET: 1 OF 1

NO	COMPONENT NUMBER	MATERIAL	FINISH	QTY
1	SMA MALE	BRASS	GOLD	2
2	CABLE	RG316	BROWN	1
3	Heat shrinkable tube	EVA	BLACK	2
6				