
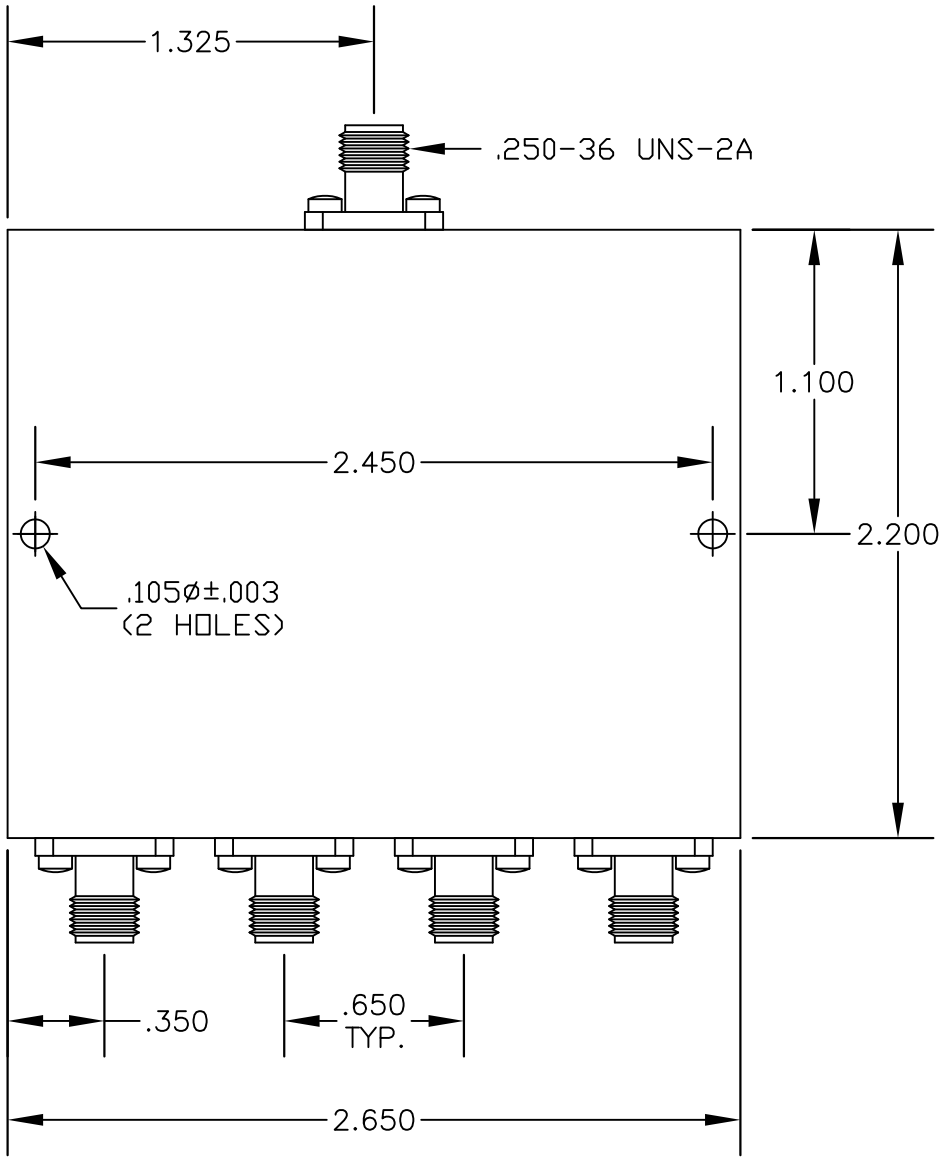


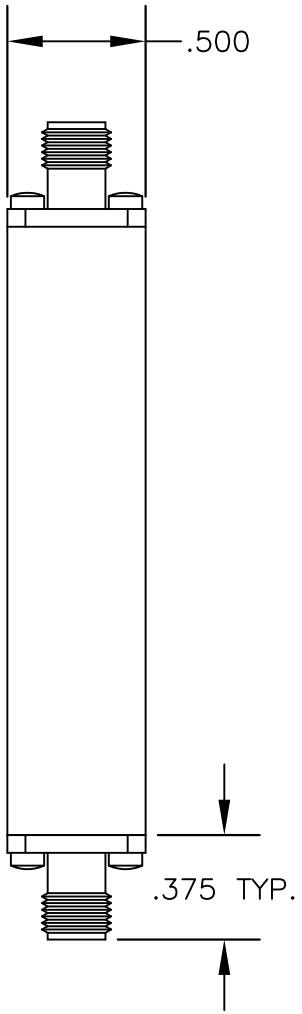

SPECIFICATIONS

FREQUENCY RANGE: 2 TO 4 GHz
NUMBER OF OUTPUT PORTS: 4
MINIMUM ISOLATION: 18 dB
MAXIMUM VSWR: 1.50
MAXIMUM INSERTION LOSS: .60 dB

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE	DES.
PE2015	SMA FEMALE POWER DIVIDER FREQUENCY RANGE: 2-4 GHz 4 OUTPUT PORTS

SIZE A	FSCM NO. 53919	CAD FILE 032002	SCALE N/A		127

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.