
Fast Recovery Rectifier MUR30120CT

FEATURES

- Ultrafast Recovery Time
- Low Forward Voltage
- Low Leakage Current
- 150℃ Operating Junction Temperature

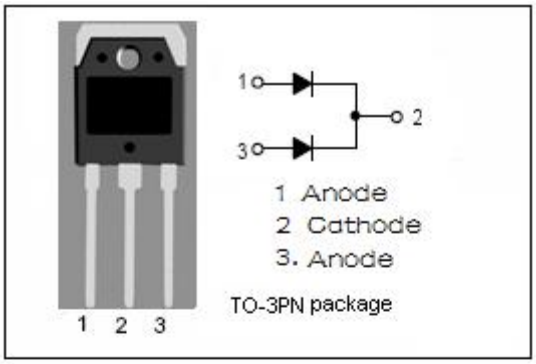


MECHANICAL CHARACTERISTICS

- Case: Epoxy, Molded
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260℃ Max. for 10 Seconds

APPLICATIONS

- Designed for use in switching power supplies, inverters and as free wheeling diodes.

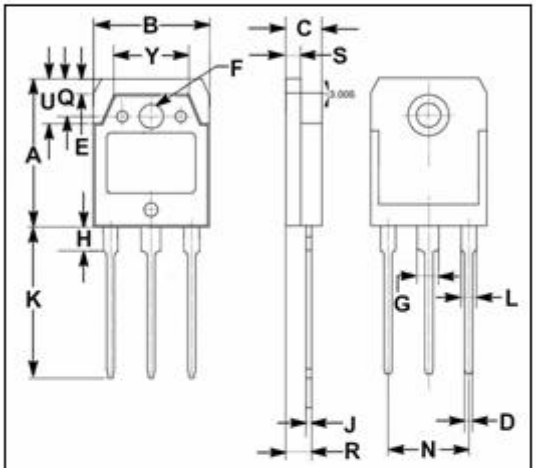

DIM	mm MIN	MAX
A	19.60	20.30
B	15.50	15.70
C	4.70	4.90
D	0.90	1.10
E	1.90	2.10
F	3.40	3.60
G	2.90	3.20
H	3.20	3.40
J	0.595	0.605
K	19.80	20.70
L	1.90	2.20
N	10.89	10.91
Q	4.90	5.10
R	3.35	3.45
S	1.995	2.100
U	5.90	6.20
Y	9.90	10.10

ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V_{RRM} V_{RWM} V_R	Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	1200	V
$I_{F(AV)}$	Average Rectified Forward Current **Per Leg** (Rated V_R) **Total Device**	15 30	A
I_{FM}	Peak Repetitive Forward Current (Rated V_R, Square Wave,20kHz) **Per Diode Leg**	30	A
I_{FSM}	Nonrepetitive Peak Surge Current (Surge applied at rated load conditions half-wave, single phase, 60Hz)	300	A
T_J	Junction Temperature	-55~150	℃
T_{stg}	Storage Temperature Range	-55~150	℃

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j\text{-}c}$	Thermal Resistance,Junction to Case	0.9	℃/W

ELECTRICAL CHARACTERISTICS(T_a=25℃) (Pulse Test: Pulse Width=300μs,Duty Cycle≤2%)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
V_F	Maximum Instantaneous Forward Voltage	I_F= 15A	2.0	V
I_R	Maximum Instantaneous Reverse Current	V_{RRM}= 1200V	10	μA
t_{rr}	Maximum Reverse Recovery Time	IF =20A，di/dt = 200A/μs, VCC = 150V	500	ns