




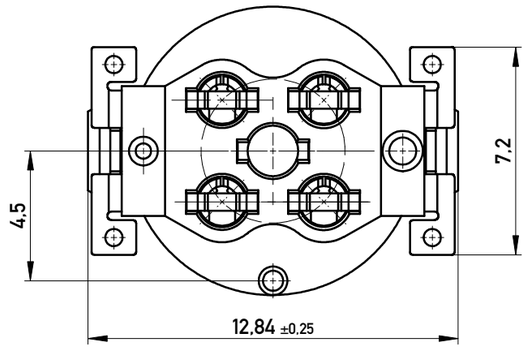


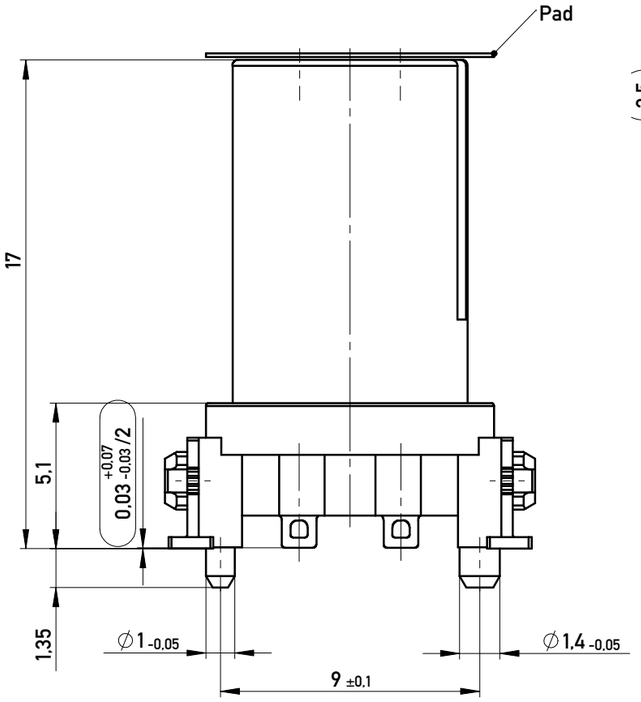

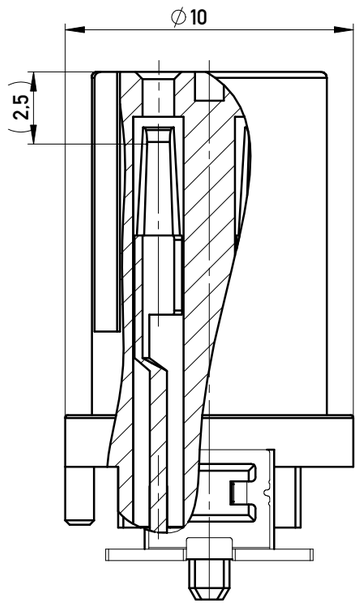

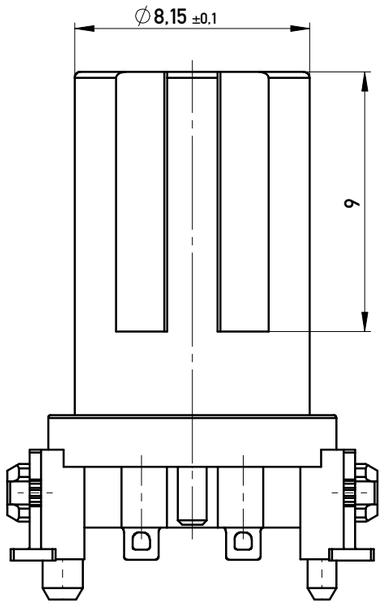



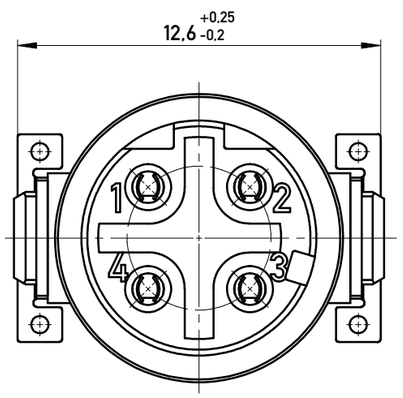

SPC-Maß: Prüfmerkmale der Kategorie /1


/1 Für SPC-Maße muss eine x/s Regelkarte geführt werden mit Nachweis der Prozessfähigkeit in der Serie (Cpk) oder 100% - Prüfung


Prüfmerkmal: Prüfmerkmale der Kategorie /2 und /3


/2 Für Prüfmerkmale muss eine x/s Regelkarte geführt werden

/3 Prüfmerkmale werden serienbegleitend geprüft

Verpackt im Gurt nach DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 100 Stück
Packaging unit: 100 pcs








Abspulrichtung - *Reel off Direction*

Layout - Vorschlag

PCB - Layout proposal

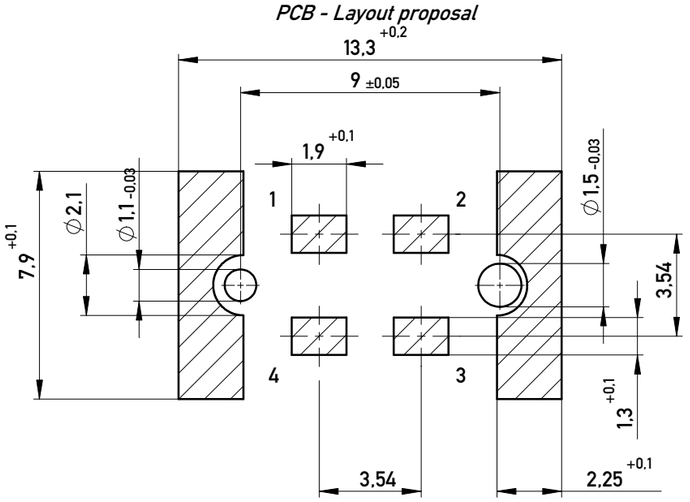

Koplanarität aller Kontakte und Clip <= 0,1mm
Coplanarity of all contacts and clips <= 0,1mm
Teile: 100Stck. in Luftpolsterbeutel/Schüttgut
Lot: 100pcs, bulk packaging (air cushion bag)

4 Pol.	Gurtverpackung / Tape on Reel Packaging
Typ	Bemerkung

Information:

Tolerances

All Dimensions in mm

Scale 5:1

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation

Federleiste M12 D Cod.

4 polig 17mm Type SMD

ERNI www.ERNI.com

103003680002

K

A3

Index		Date	
m		09.08.2016	

Class M12