
High Voltage Damper Diodes

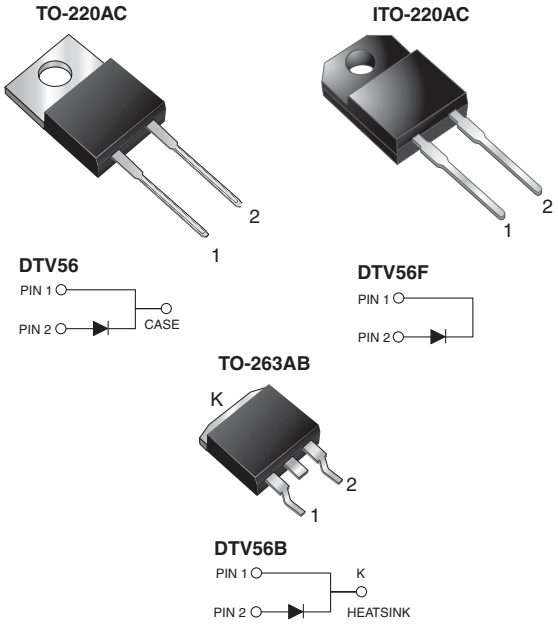

FEATURES

- Glass passivated chip junction
- High breakdown voltage capability
- Very fast reverse recovery time
- Fast forward recovery time
- High efficiency, low switching losses
- Meets MSL level 1, per J-STD-020, LF maximum peak of 245 °C (for TO-263AB package)
- Solder dip 260 °C, 40 s (for TO-220AC and ITO-220AC package)
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC

RoHS COMPLIANT

TYPICAL APPLICATIONS

For use in high resolution display TV and monitor horizontal deflection application.

MECHANICAL DATA

Case: TO-220AC, ITO-220AC, TO-263AB

Epoxy meets UL 94 V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD 22-B102
E3 suffix for consumer grade, meets JESD 201 class 1A whisker test

Polarity: As marked

Mounting Torque: 10 in-lbs maximum

PRIMARY CHARACTERISTICS	
$I_{F(AV)}$	10 A
V_{RRM}	1500 V
t_{rr}	135 ns
t_{fr}	350 ns
V_F	1.5 V

MAXIMUM RATINGS (T_C = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	1500	V
Maximum RMS voltage	V_{RMS}	1050	V
Maximum DC blocking voltage	V_{DC}	1500	V
Maximum average forward rectified current (fig. 1)	$I_{F(AV)}$	10	A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load at T_C = 100 °C	I_{FSM}	130	A
Operating junction and storage temperature range	T_J, T_{STG}	- 55 to + 150	°C
Isolation voltage (ITO-220AC only) from terminal to heatsink t = 1 min	V_{AC}	1500	V

For technical questions within your region, please contact one of the following:
DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com

DTV56, DTV56F, DTV56B

Vishay General Semiconductor

ELECTRICAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)					
PARAMETER	**TEST CONDITIONS**		**SYMBOL**	**VALUE**	**UNIT**
Maximum instantaneous forward voltage (1)	I_F = 6 A I_F = 6 A	T_J = 25 °C T_J = 125 °C	V_F	1.8 1.5	V
Maximum DC reverse current at V_{RRM}		T_J = 25 °C T_J = 125 °C	I_R	100 1.0	µA mA
Maximum reverse recovery time	I_F = 1.0 A, dI/dt = 50 A/µs, V_R = 30 V, I_{rr} = 0.1 I_{RM}		t_{rr}	135	ns
Typical forward recovery time	I_F = 6 A, dI/dt = 48 A/µs, V_{FR} = 3 V		t_{fr}	350	ns
Peak forward recovery overshoot voltage	I_F = 6 A, dI/dt = 48 A/µs	typical maximum	V_{FP}	10 14	V

Note:

(1) Pulse test: 300 µs pulse width, 2 % duty cycle

THERMAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)					
PARAMETER	**SYMBOL**	**DTV56**	**DTV56B**	**DTV56F**	**UNIT**
Typical thermal resistance from junction to case	$R_{\theta JC}$	2.0		4.0	°C/W

ORDERING INFORMATION (Example)					
PACKAGE	**PREFERRED P/N**	**UNIT WEIGHT (g)**	**PACKAGE CODE**	**BASE QUANTITY**	**DELIVERY MODE**
TO-220AC	DTV56-E3/45	1.80	45	50/tube	Tube
ITO-220AC	DTV56F-E3/45	1.95	45	50/tube	Tube
TO-263AB	DTV56B-E3/45	1.77	45	50/tube	Tube
TO-263AB	DTV56B-E3/81	1.77	81	800/reel	Tape and reel

RATINGS AND CHARACTERISTICS CURVES

(T_A = 25 °C unless otherwise noted)

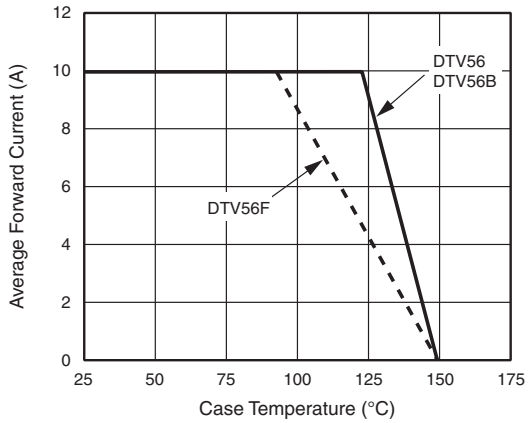


Figure 1. Forward Current Derating Curve

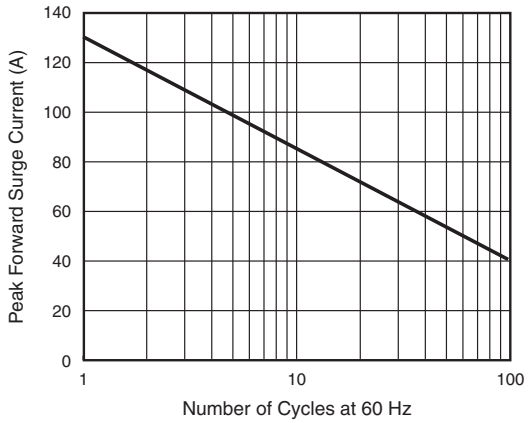


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

For technical questions within your region, please contact one of the following:
DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com

Document Number: 88576
Revision: 14-Jan-11

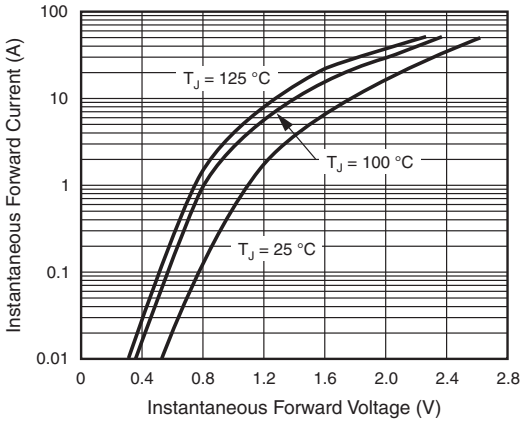


Figure 3. Typical Forward Voltage

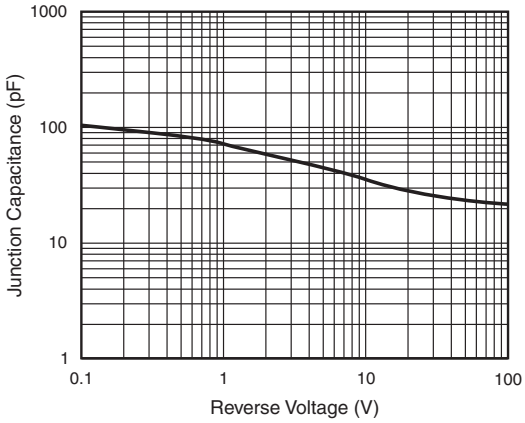


Figure 5. Typical Capacitance

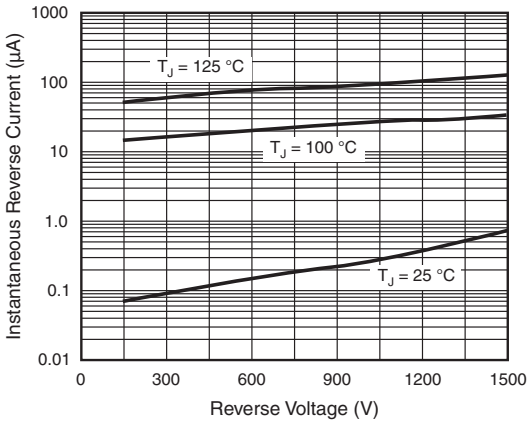


Figure 4. Typical Reverse Current


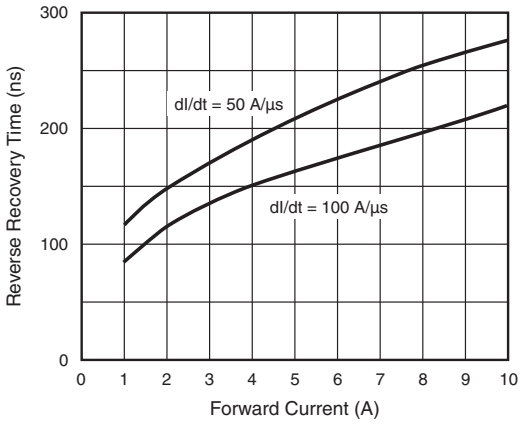



Figure 6. Typical Reverse Recovery Time

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)


TO-220AC

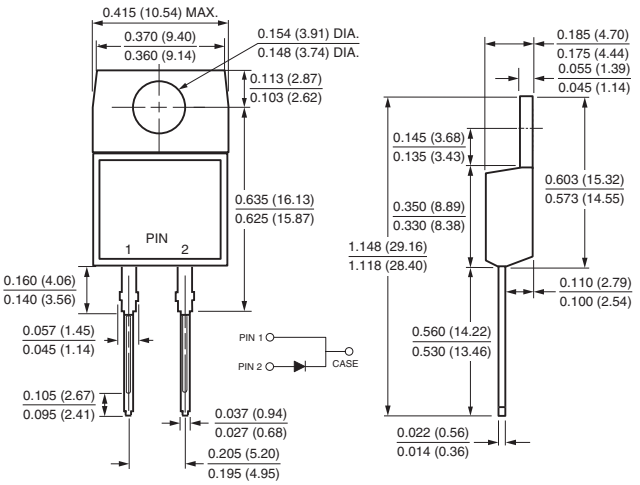


ITO-220AC

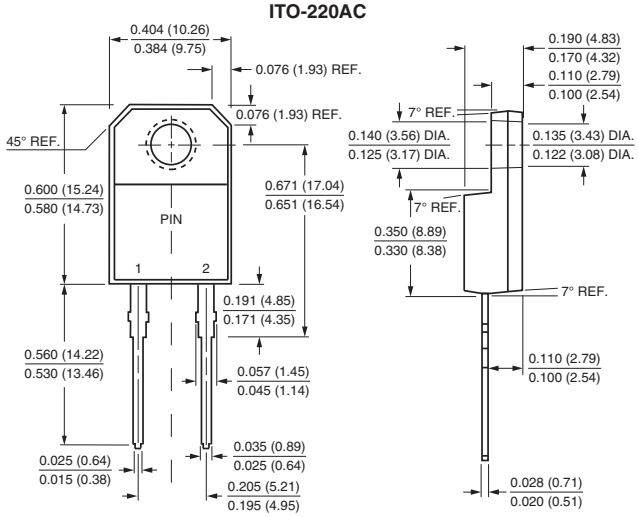

TO-263AB

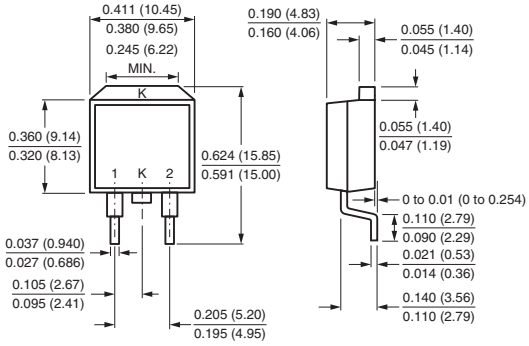

Mounting Pad Layout



For technical questions within your region, please contact one of the following:
DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com

Document Number: 88576
Revision: 14-Jan-11

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay’s knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer’s responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer’s technical experts. Product specifications do not expand or otherwise modify Vishay’s terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.