KT234520

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Split-Dual Bipolar Transistor Module
200 Amperes/600 Volts

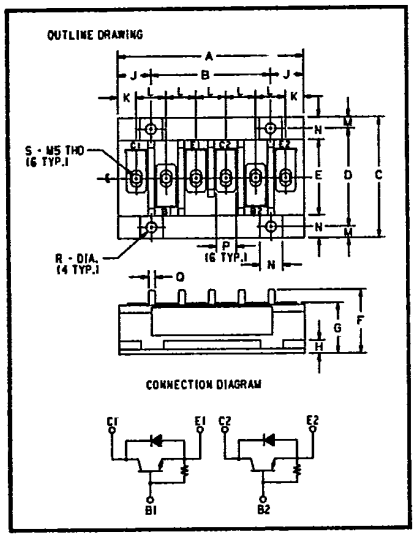

600 Volt KT234520 Outline Drawing

Dimension	Inches	Millimeters
A	3.858±.016	98±0.4
B	2.48±.012	63±0.3
C	2.52±.016	64±0.4
D	2.047±.012	52±0.3
E	1.575±.012	40±0.3
F	1.339 Max.	34 Max.
G	1.063+.02/−.00	27+0.5/−0.0
H	.276	7
J	.689	17.5
K	.374	9.5
L	.622	15.8
M	.236	6
N	.472	12
P	.413±.008	10.5±0.2
Q	.134	3.4
R	.216±.006 Dia.	5.5±0.15 Dia.
S	M5 Metric	M5

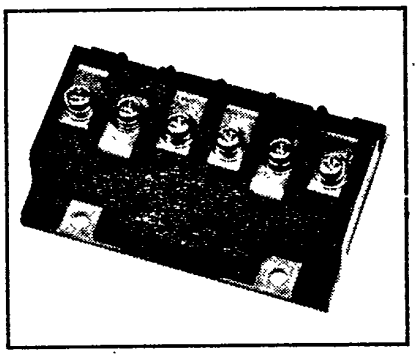

KT234520
Split-Dual Bipolar Transistor Module
200 Amperes/600 Volts

Description
Powerex Split-Dual Bipolar Transistor Modules are designed for use in switching applications. The modules are isolated consisting of two Bipolar Transistors with each transistor having a reverse parallel connected high-speed diode.

Features:
- ☐ Isolated Mounting
- ☐ Planar Chips
- ☐ Discrete Fast Recovery Feed-Back Diode
- ☐ Low $V_{CE(SAT)}$
- ☐ Fast Switching

Applications:
- ☐ Inverters
- ☐ DC Motor Control
- ☐ Switching Power Supplies
- ☐ AC Motor Control

Ordering Information
Example: Select the complete eight digit module part number you desire from the table - i.e. KT234520 is a 450 $V_{CEO(SUS)}$ (600 V_{CEV}), 200 Ampere Split-Dual Bipolar Module.

Type	$V_{CEO(SUS)}$ Volts (×10)	Current Rating Amperes (×10)
KT23	45	20

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

KT234520
Split-Dual Bipolar Transistor Module
200 Amperes/600 Volts

Maximum Ratings T_J =25°C unless otherwise specified

	Symbol	KT234520	Units
Junction Temperature	T_J	−40 to 150	°C
Storage Temperature	T_{STG}	−40 to 125	°C
Collector-Emitter Sustaining Voltage	$V_{CEO(SUS)}$	450	Volts
Collector-Emitter Sustaining Voltage V_{BE} = −2V	$V_{CEV(SUS)}$	600	Volts
Collector-Base Voltage	V_{CBO}	600	Volts
Emitter-Base Voltage	V_{EBO}	7	Volts
Collector-Emitter Voltage V_{BE} = −2V	V_{CEV}	600	Volts
Continuous Collector Current	I_C	200	Amperes
Diode Forward Current	I_{FM}	30	Amperes
Continuous Base Current	I_B	30	Amperes
Diode Surge Current	I_{FSM}	300	Amperes
Power Dissipation	P_T	830	Watts
Max. Mounting Torque M5 Terminal Screws	—	17	in-lb
Max. Mounting Torque M5 Mounting Screws	—	17	in-lb
Module Weight	—	420	Grams
V isolation	V_{RMS}	2500	Volts

Electrical and Mechanical Characteristics T_J =25°C unless otherwise specified

Characteristics		Symbol	Test Conditions	KT234520 Min.	Typ.	Max.	Units
Collector Cutoff Current		I_{CEV}	V_{CE} =600V, V_{BE} =−2V	—	—	2	mA
Emitter Cutoff Current		I_{EBO}	V_{EB} =7V	—	—	300	mA
DC Current Gain		h_{FE}	I_C =200A, V_{CE} =2V	10	—	—	—
Diode Forward Voltage		V_{FM}	I_{FM} =30A	—	—	1.8	V
Collector-Emitter Saturation Voltage		$V_{CE(SAT)}$	I_C =200A, I_B =20A	—	—	2.0	V
Base-Emitter Saturation Voltage		$V_{BE(SAT)}$	I_C =200A, I_B =20A	—	—	2.2	V
Resistive Load Switch Times	Turn On	t_{on}	V_{CC} =300V	—	—	2.5	μs
	Storage Time	t_s	I_C =200A	—	—	7	μs
	Fall Time	t_f	I_{B1} = −I_{B2} =20A	—	—	1.0	μs
Thermal Resistance, Case to Sink Lubricated		$R_{\theta CS}$	Per Half Module	—	—	0.1	°C/W
Thermal Resistance, Junction to Case		$R_{\theta JC}$	Transistor Part	—	—	0.15	°C/W
Thermal Resistance, Junction to Case		$R_{\theta JC}$	Diode Part	—	—	0.6	°C/W