❑ MN103001G / F01K

Type	**MN103001G / F01K (under development)**
Command ROM (×64-Bit)	128 KB / 256 KB (Flash)
Data RAM (×32-Bit)	8 KB
Minimum Instruction Execution Time	**MN103001G: 17 ns (at 3.3 V, 60 MHz)** **MN1030F01K: 25 ns (at 3.3 V, 40 MHz) (under development)**
Interrupts	• RESET • IRQ × 8 • NMI • Timer × 18 • SIF × 8 • WDT • A/D • System error
Timer Counter	**Timer Counter 0 to 3: 32-Bit × 1** (Interval Timer, Event Count, Timer Output, Interrupt, Clock Source for Serial I/F, A/D Conversion Trigger) Clock Source . . IOCLK, IOCLK/8, IOCLK/32, External Clock Input, Underflow of Timer Counter Interrupt Source . .. . Underflow of Timer Counter 0, 1, 2, 3 **Timer Counter 4 to 7: 32-Bit × 1** (Interval Timer, Event Count, Timer Output, PWM Output, Interrupt) Clock Source IOCLK, IOCLK/8, IOCLK/32, External Clock Input, Underflow of Timer Counter Interrupt Source Underflow of Timer Counter 4, 5, 6, 7 **Timer Counter 8 to B: 32-Bit × 1** (Interval Timer, Event Count, Timer Output, PWM Output, Interrupt, Clock Source for Serial I/F) Clock Source . IOCLK, IOCLK/8, IOCLK/32, External Clock Input, Underflow of Timer Counter Interrupt Source Underflow of Timer Counter 8, 9, A, B * Each of Timer Counters 0 to 3, 4 to 7, and 8 to B can be Changed to an 8-, 16-, or 24-Bit Timer Counter **Timer Counter 10: 16-Bit × 1** (Interval Timer, Event Count, PWM Output, Toggle Output (2 Lines), Interrupt, Input Capture (2 Lines), One-Shot Output) Clock Source IOCLK, IOCLK/8, IOCLK/32, External Clock Input, Underflow of Timer Counter Interrupt Source Overflow of Timer Counter 10, Coincidence with Compare Capture (2 Lines) or at Capture **Timer Counter 11: 16-Bit × 1** (Interval Timer, Event Count, Toggle Output, Interrupt) Clock Source IOCLK, IOCLK/8, IOCLK/32, External Clock Input, Underflow of Timer Counter Interrupt Source Underflow of Timer Counter **Timer Counter 12: 16-Bit × 1** (Same Functions as Those of Timer Counter 11) **Timer Counter 13: 16-Bit × 1** (Same Functions as Those of Timer Counter 11) **Watchdog Timer: 16- to 25-Bit × 1ch**
Serial Interface	**Serial 0: 7-, 8-Bit × 1** (Clock Synchronous, Start-Stop Synchronous, I^2C Mode) **Serial 1, 2: 7-, 8-Bit × 2** (Clock Synchronous Mode) **Serial 3: 7-, 8-Bit × 1** (Start-Stop Synchronous Mode) Clock Source (Clock Synchronous Mode, Start-Stop Synchronous Mode) IOCLK, Underflow of Timer Counter, External Clock (I^2C Mode) IOCLK, Underflow of Timer Counter

I/O Pins			
	I/O	**53**	• Common use 53
	Output	**15**	• Common use · 15
	Input	**4**	• Common use 4

A/D	10-Bit × 4ch
PWM	16-Bit × 1ch, 8-Bit x 8ch (Common with Timer)
ICR	16-Bit × 2ch (Common with OCR)
OCR	16-Bit × 2ch, 8-Bit × 8ch (Common Partially with ICR)
Package	LQFP100-P-1414
Electrical Characteristics	MN103001G

Supply Current

Parameter	Symbol	Condition	Limit min	Limit typ	Limit max	Unit
Operating Supply Current	IDD1	VDD, PVDD, AVDD = 3 3 V VI = VDD or VSS Fosc = 15 0 MHz CKSEL pin = Hi level At internal = 60 MHz Output released			180	mA
Supply current at stopping	IDD4	VDD, PVDD, AVDD = 3 465 V VI = VDD or VSS Fosc = Oscillation stopped Output released			100	µA

(Ta = –20 °C to +70 °C)

A/D Conversion Performance

Parameter	Symbol	Condition	Limit min	Limit typ	Limit max	Unit
Resolution					10	Bits
A/D conversion absolute Error		VREF+ = 3 3 V A/D conversion clock = 5 MHz			±7	LSB
A/D conversion relative Error					±4	LSB
A/D conversion time			2.8			µs

(Ta = –20 °C to +70 °C, AVDD = 3.3 V, AVSS = 0.0 V)


See the next page for support tool and pin assignment.

Support Tool

In-Circuit Emulator

PX-ICE103001

Pin Assignment

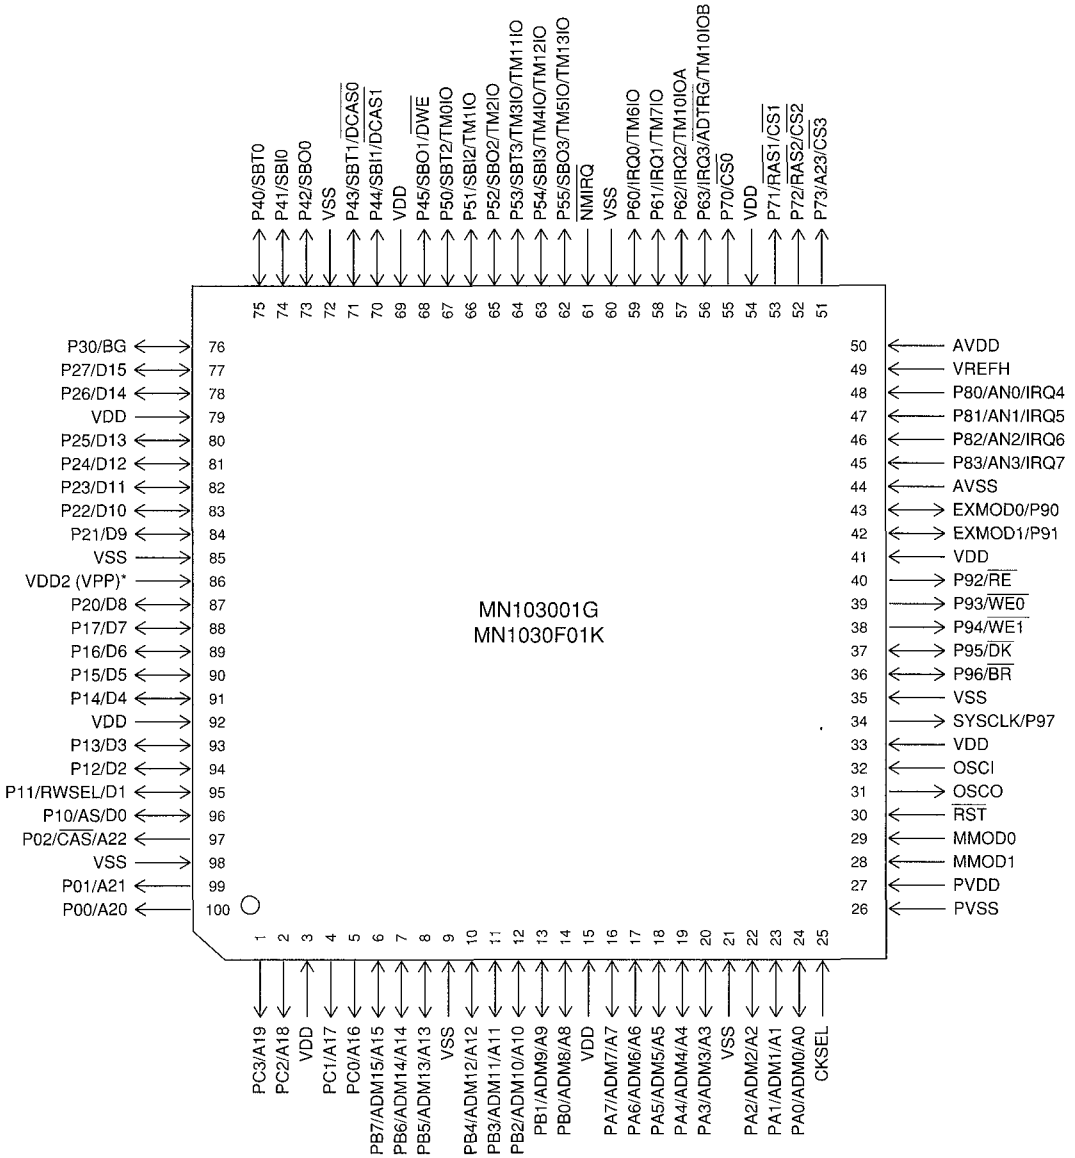

LQFP100-P-1414

* VDD2 for MN103001G and VPP for MN1030F01K