

# PART NUMBER: 705QPC250KB5#

MOTOR RUN/AC

Parts are RoHS compliant

## ELECTRICAL SPECIFICATIONS

Capacitance: 7  $\mu$ F

Dissipation Factor: 0.01 Max at 1000 Hz and 25°C

Temperature Coefficient: 400 PPM/°C: -200 PPM/°C, 200 PPM/°C

Ripple Current: 0 at 0 and 0

ESR: - at - and -

Self Inductance: Nanohenries maximum per mm of body length and lead length

dvdt: V/ $\mu$ s

Terminal to Terminal Dielectric strength: 1.75 times the rated AC voltage when applied between the terminals for 60 seconds

Insulation Resistance (Terminal to Terminal): 1000 MINIMUM after 100 Volts DC is applied for 60 seconds at 20°C

Reliability:

Load Life: 5000 hours at N/A with 0% of rated voltage

Capacitance Change: 0 of initially measured value

D.F. Change: 0 of maximum specified value

I.R. Change: 0 of minimum specified value

Tolerance: -10 % , +10 %

Temperature Range: -25°C to +85°C

Above 85°C the rated (DC/AC) voltage must be derated at pe

WVDC: 0 Volts DC

SVDC: N/A Volts DC

VAC: 250 VAC at 70°C

200 VAC at 85°C

Terminal to case Dielectric strength: 2000 VAC when app the terminals and case for 60 seconds

Insulation resistance (Terminal to Case): 2000 Megohms after 100 Volts DC is applied for 60 seconds at 20°C

## PHYSICAL DIMENSIONS


Length (L): 52 mm, 1 mm

Height (H): 26 mm, +/-0.5 mm

Thickness (T): 18 mm, +/-1 mm

Lead Finish: Matte Tin

### Choose Lead Style

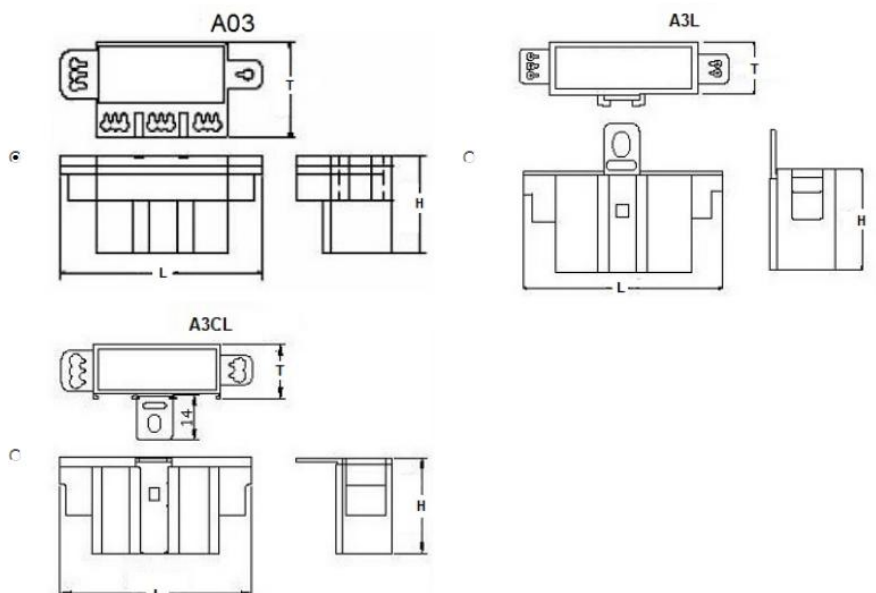

### Choose Lead Style