


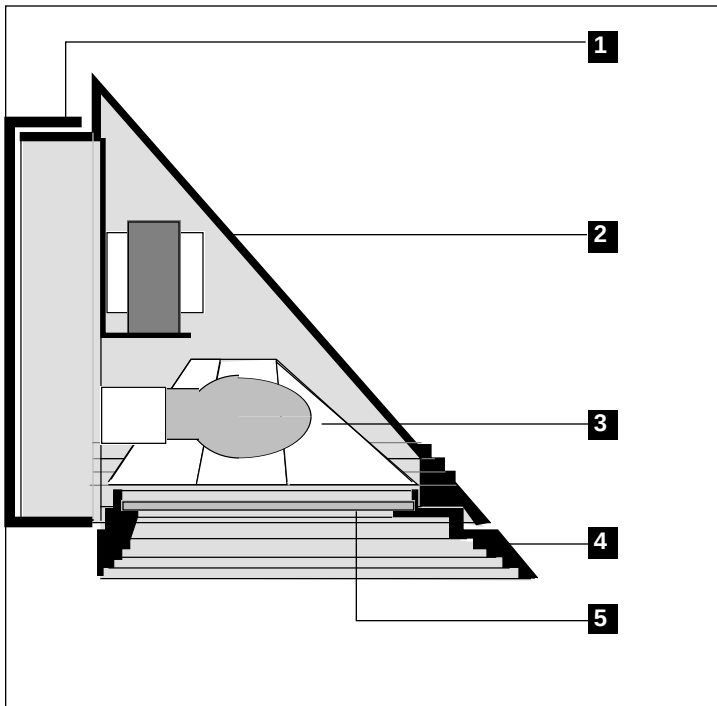

Specification

W900 . W901

All exposed cast aluminum components are made of non corrosive pure aluminum copper free (Aluminum is less than .1% copper content.#356 alloy.)


Finish: All polyester powder baked coatings preceded with a 5 baths preparation process. Meets military grade MIL-C781706 with a 2000 hours salt spray test.

- Pulse rated medium base porcelain socket.
- 75W/600V thermoplastic compact fluorescent socket.
- One-piece molded silicone gasket with memory retention.
- High power factor CWA ballast. Or 98% P.F.electronic smart ballast with end of life detection for compact fluorescent.
- All stainless steel hardware.
- All Moving and removable parts are sealed with a memory retention silicone gasket.

- 1- One piece cast aluminum wall mounting triangular box.
- 2- One piece cast aluminum triangular housing.
- 3- Aluminum specular multi facet reflector.
- 4- One piece sealed cast aluminum regressed lens frame.
- 5- Clear tempered sealed lens.

W901 Up light with additional flush mount clear tempered glass lens to minimize accumulation of debris.

Photometry



Separate updated technical specification sheets with related models and light sources with I.E.S formatted photometry are available on www.luminis.com.

Cross view Plane view

W900
Down light

W901
Up light

Certification

UL. Wet Location. IP54

Mounting & E.P.A.

Max. weight: 30 lbs. E.P.A.: .8 sq./ft
Installation: Mounts over a standard 4" octagonal box with 3 1/2" c/c mounting holes.
Additional mounting holes are provided with wall plate.

For options details and specifications, please refer to page 41

Model#	Light source selection	Voltage	Finish	Options
☐ W900 ☐ W901  	MH (ED17) ☐ M70 ☐ M100 ☐ M150 ☐ M175 CF (Gx24q) ☐ F132 ☐ F142 ☐ F157 ☐ F170 HPS (ED17) ☐ H70 ☐ H100 ☐ H150	120 V Standard factory prewired (If no voltage is specified) For other voltages, please specify with catalog number. H.I.D. ☐ 208 V ☐ 240 V ☐ 277 V ☐ 347 V COMP. FLUO. Smart ballast 120/277 ☐ 347 V (To specify)	(Refer to color chart) <u>Standard selection</u> ☐ WHT: Snow white ☐ BKT: Jet black ☐ BZT: Bronze ☐ GRT: Titanium gray ☐ DGT: Gun metal ☐ CHT: Champagne ☐ MST: Matte silver ☐ GNT: Forest green <u>Optional colors</u> ☐ CS: Custom color ☐ RAL: RAL# color	Electrical ☐ EM42S: 1 lamp (26/32/42W) EM battery. ☐ FS : Fuse ☐ PH1: 120/277V photo cell ☐ PH2: 347V photo cell

(Lamps by others)

Luminaires may be altered for design improvements or discontinued without prior notice.