
- Industry compatible
- Competitively priced
- Dual Row
- No of contacts 10-100
- Gold plating contacts
- 1.27mm pitch

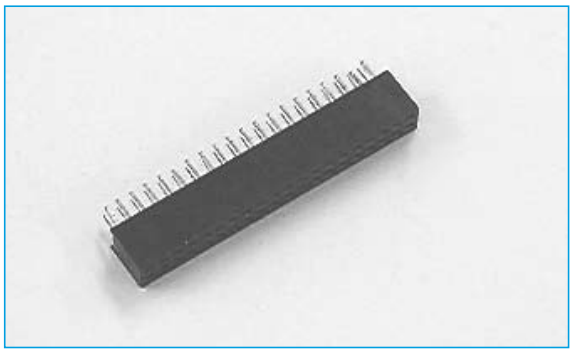

SPECIFICATION

Material & Finish

Insulator: LCP, glass reinforced, rated UL 94V-0

Contact: Phosphor Bronze

Electrical Characteristics

Rating Current: 0.5 Amp DC

Contact Resistance: 30 mΩ


Insulation Resistance: 1000 MΩ min.

Dielectric Voltage: 250v AC for 1 minute

Operating Temperature: -40°C to +105°C

* Mating suggestion: C11, C12 series.

OUTLINE DRAWING

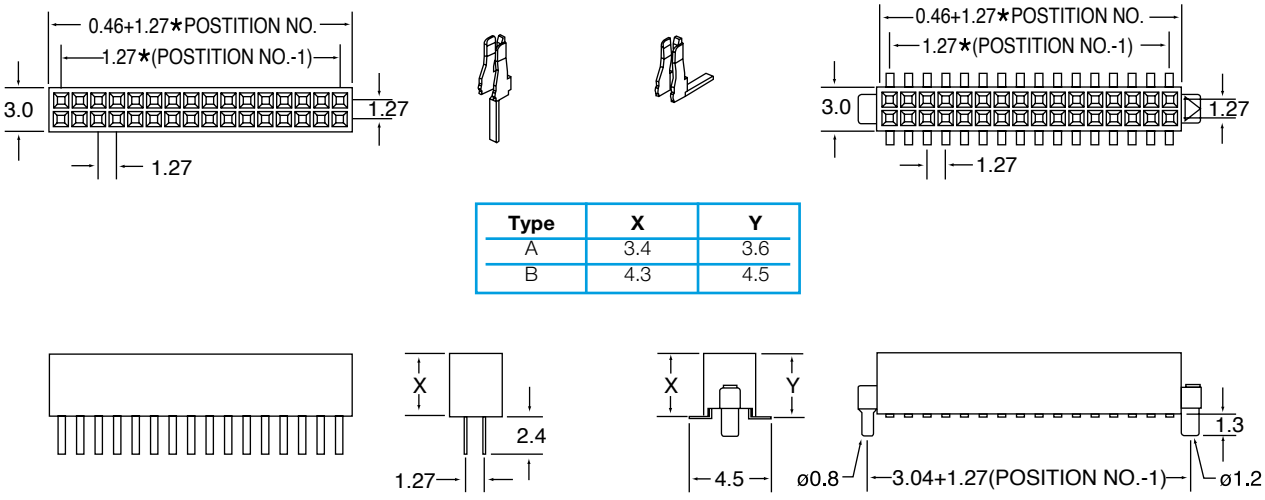

Type	X	Y
A	3.4	3.6
B	4.3	4.5

ORDERING INFORMATION

DBC	B28	D	10	B	G	A	B	B	1
Dubilier Connectors	Series	No. of Rows D = Dual Row	No. of Contacts 05-50	Contact Material B = Phosphor Bronze	Contact Plating G =Gold	Mounting Type A = Through hole B = SMT	Height B = 4.3mm	Peg B = Without	Colour 1 = Black