

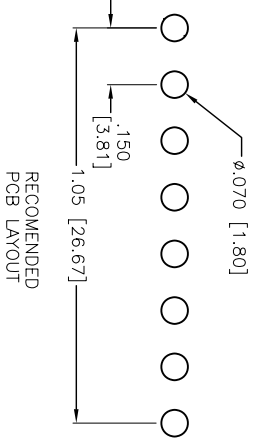



Rev	AWO #	Description	Date	Appr
-		RELEASED	01/25/06	

APPROVED: _____
 DATE: _____ TITLE: _____

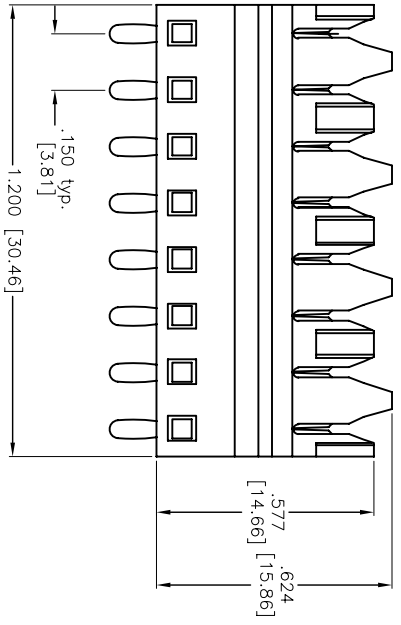

SPECIFICATIONS:
 Material: Insulator: PC, glass reinforced, rated UL 94V-0
 Insulator color: White
 Contacts: Phosphor Bronze
 Plating: Tin over Copper underplate
 Electrical:
 Operating voltage: 250 VDC max
 Current rating: 15 Amps max
 Contact resistance: 15 mohms max
 Insulation resistance: 500 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating: Operating temperature: -20°C to +80°C
Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235 for 5 sec.

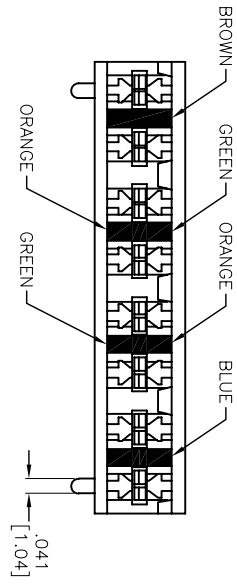

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 110 IDC TERMINAL BLOCK, 8 POSITION
 PCB WITH COLOR MARKERS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HILES	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS	DATE		
DRAWN	SS	01/25/06	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	TB1-08-3-81-CM1	-	
REF:	SCALE: NTS	SHEET	1 OF 1