

MXK SERIES

UPGRADE

105°C Ultra Miniaturized

•Load Life : 105°C 3000 hours.

RoHS
compliance



◆SPECIFICATIONS

Items	Characteristics					
Category Temperature Range	-25~+105℃					
Rated Voltage Range	400~450Vdc					
Capacitance Tolerance	±20% (20℃, 120Hz)					
Leakage Current(MAX)	I=3 √CV or 5mA whichever is smaller (After 5 minutes application of rated voltage) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(Vdc)					
Dissipation Factor(MAX) (tanδ)	0.2 (20℃, 120Hz)					
Endurance	After applying rated voltage with rated ripple current for 3000 hours at 105℃, the capacitors shall meet the following requirements.					
	Capacitance Change	Within ±20% of the initial value.				
	Dissipation Factor	Not more than 200% of the specified value.				
	Leakage Current	Not more than the specified value.				
Low Temperature Stability Impedance Ratio(MAX)	<table><tr><td>Rated Voltage (Vdc)</td><td>400~450</td></tr><tr><td>Z(-25℃)/Z(20℃)</td><td>8</td></tr></table>	Rated Voltage (Vdc)	400~450	Z(-25℃)/Z(20℃)	8	(120Hz)
Rated Voltage (Vdc)	400~450					
Z(-25℃)/Z(20℃)	8					

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)	60(50)	120(100)	300	500	1k	10k≤
Coefficient	0.80	1.00	1.15	1.20	1.25	1.40

◆OPTION


	Code
PET Sleeve without plate	EFC

◆PART NUMBER

□□□ MXK □□□□ M □□□ SN D×L
 Rated Voltage Series Capacitance Capacitance Tolerance Option Terminal Code Case Size

◆DIMENSIONS

(mm)

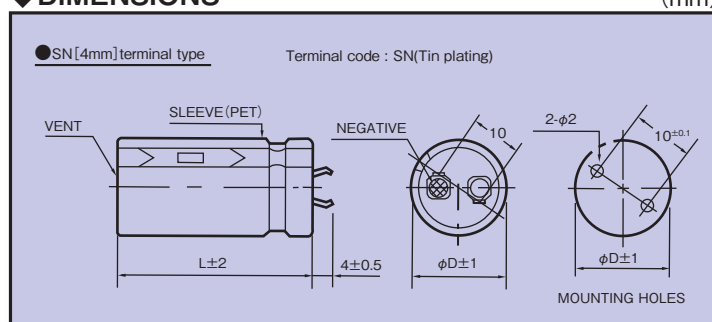

◆STANDARD SIZE

Vdc Cap(μF) φD	400								420							
	φ22		φ25		φ30		φ35		φ22		φ25		φ30		φ35	
120									22×25	0.95						
150	22×25	1.03							22×25	1.02						
									22×30	1.10						
180	22×30	1.19	25×25	1.15					22×30	1.20	25×25	1.16				
220	22×30	1.26	25×25	1.20					22×35	1.38	25×30	1.35				
	22×35	1.37	25×30	1.32												
270	22×35	1.44	25×30	1.43	30×25	1.37			22×40	1.57	25×35	1.55	30×25	1.36		
	22×40	1.56														
330	22×45	1.77	25×35	1.65	30×25	1.39			22×45	1.72	25×35	1.61	30×30	1.59	35×25	1.45
					30×30	1.56			22×50	1.85	25×40	1.76				
390	22×50	1.97	25×40	1.85	30×30	1.65	35×25	1.48	22×55	2.00	25×40	1.80	30×30	1.61	35×25	1.45
											25×45	1.96	30×35	1.82	35×30	1.66
470	22×55	2.11	25×45	2.07	30×35	1.89	35×30	1.69	22×60	2.19	25×50	2.18	30×35	1.85	35×30	1.72
	22×60	2.20											30×40	2.04		
560			25×55	2.32	30×40	2.12	35×30	1.75			25×55	2.32	30×40	2.07	35×35	1.97
											25×60	2.43	30×45	2.27		
680			25×60	2.56	30×45	2.35	35×35	2.00					30×45	2.29	35×40	2.22
													30×50	2.50		
820					30×50	2.53	35×40	2.21					30×55	2.68	35×45	2.45
					30×55	2.66	35×45	2.48					30×60	2.79		
1000					30×60	2.91	35×50	2.70							35×50	2.64
															35×55	2.76
1200							35×55	2.85							35×60	3.03
							35×60	2.99								

Vdc Cap(μF) φD	450							
	φ22		φ25		φ30		φ35	
120	22×25	0.95						
150	22×30	1.12	25×25	1.08				
180	22×30	1.17	25×25	1.14				
	22×35	1.27	25×30	1.24				
220	22×35	1.34	25×30	1.34	30×25	1.29		
	22×40	1.45						
270	22×40	1.53	25×35	1.54	30×25	1.34		
	22×45	1.65			30×30	1.49		
330	22×50	1.81	25×40	1.72	30×30	1.58	35×25	1.42
	22×55	1.88	25×45	1.85				
390	22×55	1.98	25×45	1.91	30×35	1.80	35×30	1.68
	22×60	2.07						
470			25×55	2.21	30×40	2.02	35×30	1.69
							35×35	1.92
560			25×60	2.41	30×45	2.24	35×35	1.92
							35×40	2.15
680					30×50	2.41	35×40	2.16
					30×55	2.54	35×45	2.38
820					30×60	2.77	35×45	2.36
							35×50	2.59
1000							35×55	2.78
							35×60	2.90

↑
Ripple Current (A r.m.s./120Hz, 105°C)
Case Size φD×L(mm)