
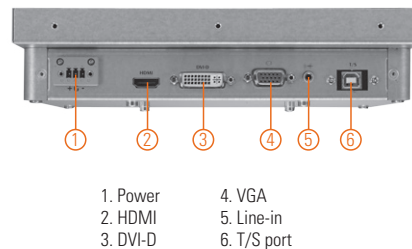
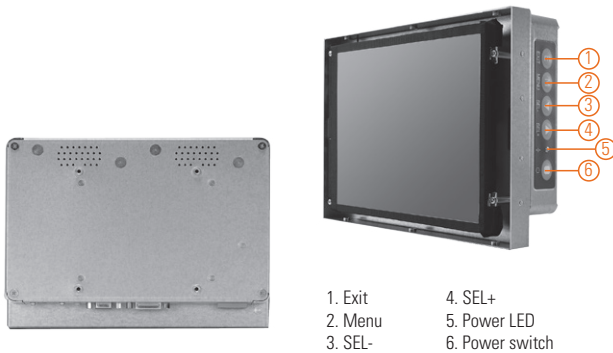


P68410 NEW

8.4" SVGA TFT Industrial Open Frame Monitor

Features

- 8.4" SVGA TFT LED backlight LCD
- Supports open frame mount, wall mount and VESA arm
- Resistive touchscreen
- Full range screw-type (locked) AC-in or 12V/24V DC-in (option)
- DVI-D, VGA and HDMI with multi-signal inputs
- Wide operating temperature supported

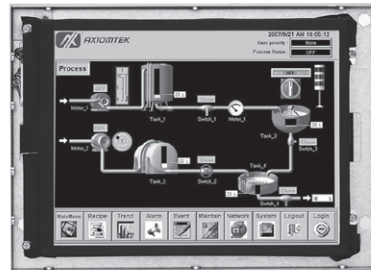

Introduction

The P68410 is an ultra slim industrial open frame monitor, which adopts 8.4-inch 450 nits SVGA LED backlight LCD display and supports multi-signal interfaces including DVI, VGA and HDMI. 12/24V DC-In means it is fit for all kinds of industrial environments. Moreover, the P68410 supports open frame mount, wall mount or VESA FPMPI mounting. With the compact mechanism design, users can enjoy free from space constraint. It is especially suitable for POI/POS, excellent HMI and all kinds of heavy-duty industrial fields.

Specifications

Front Bezel	Open frame monitor
Mounting	Open frame mount, wall mount and VESA arm
LCD Panel	Display 8.4" SVGA TFT LCD
	Max. Resolution 800 x 600
	Max. Colors 16.2M
	Active Area (mm) 170.4 x 127.8
	Pixel Pitch (mm) 0.213 x 0.213
	Response Time 30ms
	Backlight LED backlight
	Backlight MTBF 50,000 hrs
	Viewing Angle (H/V) 160°/140°
	Contrast Ratio 600 (TYP.)
	Brightness (cd/m ²) 450 nits
Display Control	OSD (on screen display)
Display Mode	VGA 640 x 350 (70Hz), VGA 640 x 480 (60/72/75Hz), VGA 720 x 400 (70Hz), SVGA 800 x 600 (60/72/75Hz)
Input Signal	DVI-D
	VGA
	HDMI
	Touchscreen: Serial RS-232 or USB interface

Specifications

I/O Connectors	1 x RS-232 or USB for touchscreen version 1 x DVI-D 1 x VGA 1 x HDMI 1 x Screw-type DC power input	
Power Adapter	Screw-type external AC/DC power adapter	
Power Consumption	9.8 W	
Touchscreen	Thickness	Resistive: 3.2 mm
	Light Transmission	Resistive: 80%
	Power Consumption	Resistive: +5V @ 100mA
	Touch Life	Resistive: 35 million touches Controller interface: RS-232 D-type 9-pin male connector or USB
Dimensions	227 mm (8.94") x 53 mm (2.09") x 162 mm (6.78")	
Packing Dimensions	362 mm (14.25") x 165 mm (6.5") x 397 mm (15.63")	
Weight (net/gross)	1.42 kg (3.11 lb)/2.3 kg (5.07 lb)	
Environment	Operating temperature: -20°C ~ +55°C (-4°F ~ +131°F) Relative humidity: 20% ~ 90% @ 40°C, non-condensing	
Packing List	1 x VGA cable 1 x RS-232 or USB cable for touchscreen (for touch version) 1 x Audio cable 1 x EU/US power cord (for AC version)	
Certificate	CE	

Ordering Information

12V/24VDC Power	Resistive (USB)	P68410R-DC-UPR-DC-U
-----------------	-----------------	---------------------

Optional Accessories

5946L203800E	HDMI cable
59461713400E	DVI cable
82231770050E	Wall mount kit
E226171106	Desktop stand

Dimensions

