

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.


TELEPHONE: (973) 378-2822
(212) 227-8006
FAX: (973) 378-8860

2N3218

The 2N 3218 is designed for low level chopper applications and embody the most advanced semiconductor technology, combining epitaxial junction growth with diffusion and oxide passivation techniques. This transistor exhibit the high voltage capabilities of alloy junction devices with the ruggedness, stability, and reliability of the planar process. The bed mounted construction utilizes a unique gold bonding technique which eliminates "purple plague". In addition, leakage current and offset voltage are exceptionally low. The inherent parameter stability of this passivated transistor allows standard matching of offset voltage to 50 microvolts over the range from -25 to $+100^{\circ}$ C.

ELECTRICAL DATA ABSOLUTE MAXIMUM RATINGS

	2N3218	
Collector To Emitter Voltage (V_{CE0})	-20	Volts
Collector To Base Voltage (V_{CB0})	-25	Volts
Emitter To Base Voltage (V_{EB0})	-25	Volts
Collector Current (I_C)	100	mA
Total Power Dissipation (free air)	400	mW
Total Power Dissipation (infinite heat sink)	2	Watts
Storage Temp (max)	200	$^{\circ}$ C
Operation Temp (max)	200	$^{\circ}$ C
Lead Temp (@ 1/16 $\pm$ 1/32 from case)	240	10 sec
Derating Factor (D_F)	2.3	mW/ $^{\circ}$ C

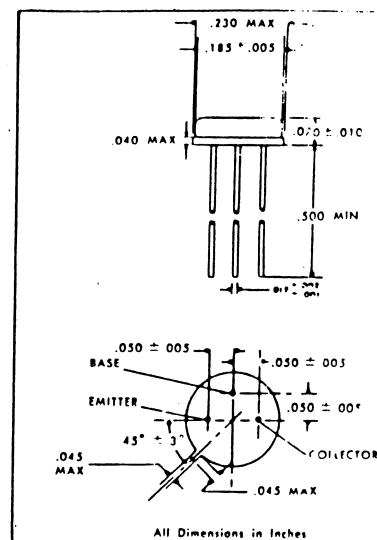

TO-46

ELECTRICAL CHARACTERISTICS $T_A = 25^{\circ}$ C (UNLESS OTHERWISE STATED)

Symbol	Parameter	Conditions	2N3218			Units
			Min.	Typ.	Max.	
I_{C0}	Collector Leakage	At Max Rated Voltage	—	0.1	1.0	nA
I_{E0}	Emitter Leakage	At Max Rated Voltage	—	0.1	1.0	nA
I_{C0}	Collector Leakage at 100° C	At Max Rated Voltage	—	0.01	0.1	μ A
I_{E0}	Emitter Leakage at 100° C	At Max Rated Voltage	—	0.01	0.1	μ A
V_0	Offset Voltage	$I_B = 200 \mu$ A $I_E = 0$	—	1.0	2.0	mV
h_{fe}	High Frequency Current Gain	$f = 1$ MC $V_{CE} = -6$ V $I_{CE} = 1$ mA	—	5	—	
r_{sat}	Inverted Dynamic Saturation Resistance	$I_E = 0.1$ mA $I_B = 1$ mA	—	25	50	ohms
C_{ob}	Collector To Base Capacitance	$V_{CB} = -6$ V $I_C = 1$ mA	—	—	14	pfd
C_{eb}	Emitter To Base Capacitance	$V_{EB} = -6$ V $I_E = 0$	—	—	8	pfd



NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.