MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING
V7–3E17D8
CW–B8419

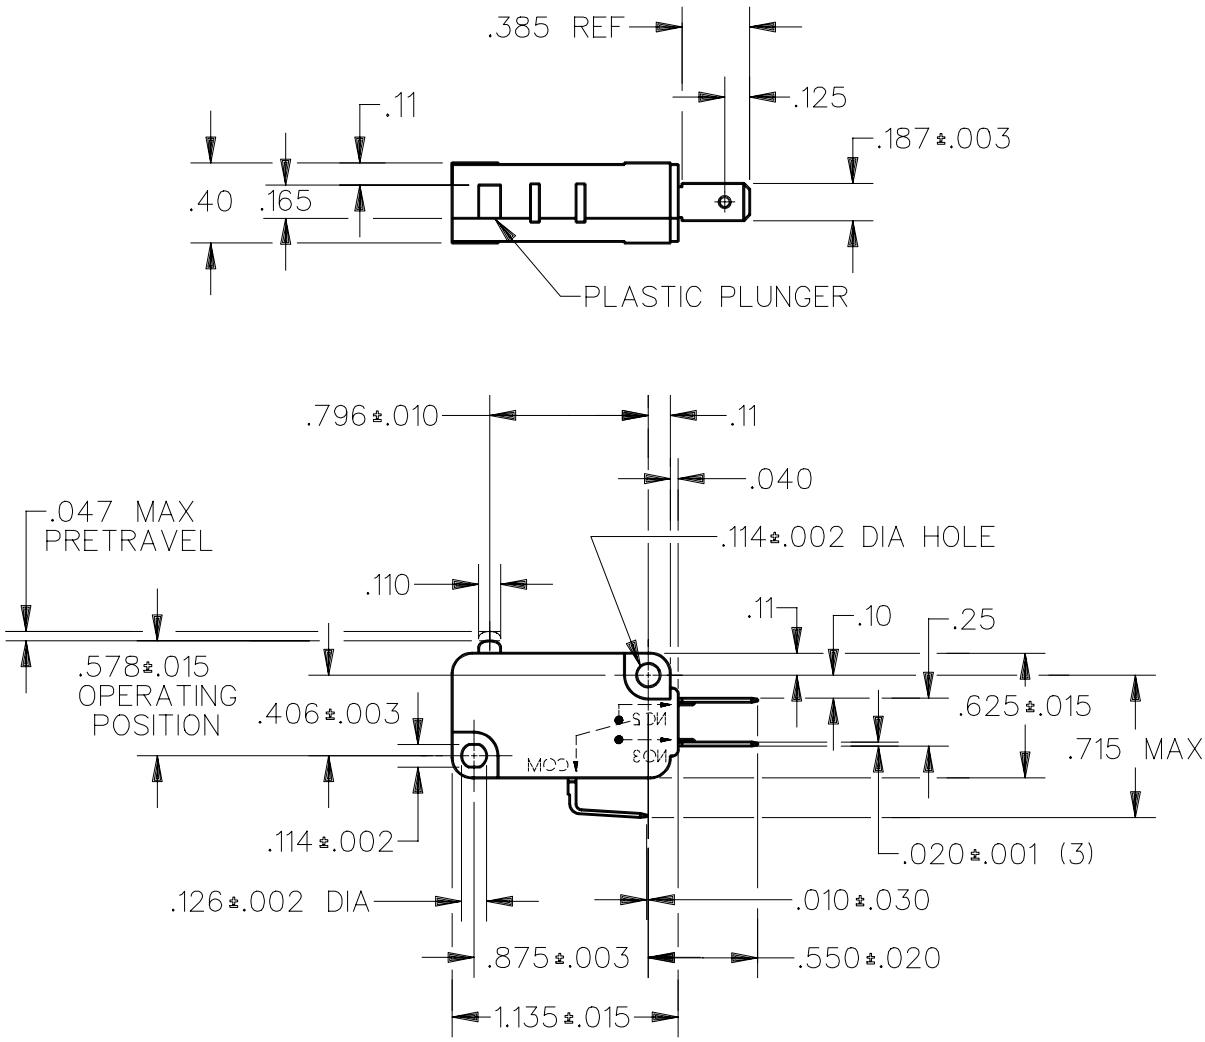

REPLACES X94131–V7
RELEASE NO. PR–18798
CATALOG LISTING V7–3E17D8
ISSUE 4

REVISIONS

A	PR–18798	WLS 6 NOV 90
B	CO 69746	WJC 15 MAR 91
C	CO 76104	GRT 4 OCT 93

CHECK
CHECK
CHECK
DAW 10 NOV 90
WLS 6 NOV 90
DRAWN
DDM/CAD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE – – – 50 GRAMS MAX
RELEASE FORCE – – – 5 GRAMS MIN
DIFFERENTIAL TRAVEL – – – .002–.010
OVERTRAVEL – – – – – – .050 MIN
FREE POSITION – – – – .625 MAX
RELEASE TRAVEL – – – – – .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L216 10A 1/3HP 125, 250 OR 277 VAC
1/2A 125 VDC
1/4A 250 VDC; 4A 125 VAC "L"

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT