64K ´ 8 CMOS FLASH MEMORY


GENERAL DESCRIPTION

The W29EE512 is a 512K bit, 5-volt only CMOS flash memory organized as 64K × 8 bits. The device can be programmed and erased in-system with a standard 5V power supply. A 12-volt V_{PP} is not required. The unique cell architecture of the W29EE512 results in fast program/erase operations with extremely low current consumption (compared to other comparable 5-volt flash memory products). The device can also be programmed and erased using standard EPROM programmers.


FEATURES

- Single 5-volt program and erase operations
- Fast page-write operations
  - 128 bytes per page
  - Page program cycle: 10 mS (max.)
  - Effective byte-program cycle time: 39 µS
  - Optional software-protected data write
- Fast chip-erase operation: 50 mS
- Read access time: 70/90/120 nS
- Typical page program/erase cycles: 1K/10K
- Ten-year data retention
- Software and hardware data protection
- Low power consumption
  - Active current: 50 mA (max.)
  - Standby current: 100 µA (max.)
- Automatic program timing with internal V_{PP} generation
- End of program detection
  - Toggle bit
  - Data polling
- Latched address and data
- TTL compatible I/O
- JEDEC standard byte-wide pinouts
- Available packages: 32-pin PLCC, TSOP and VSOP

PIN CONFIGURATIONS

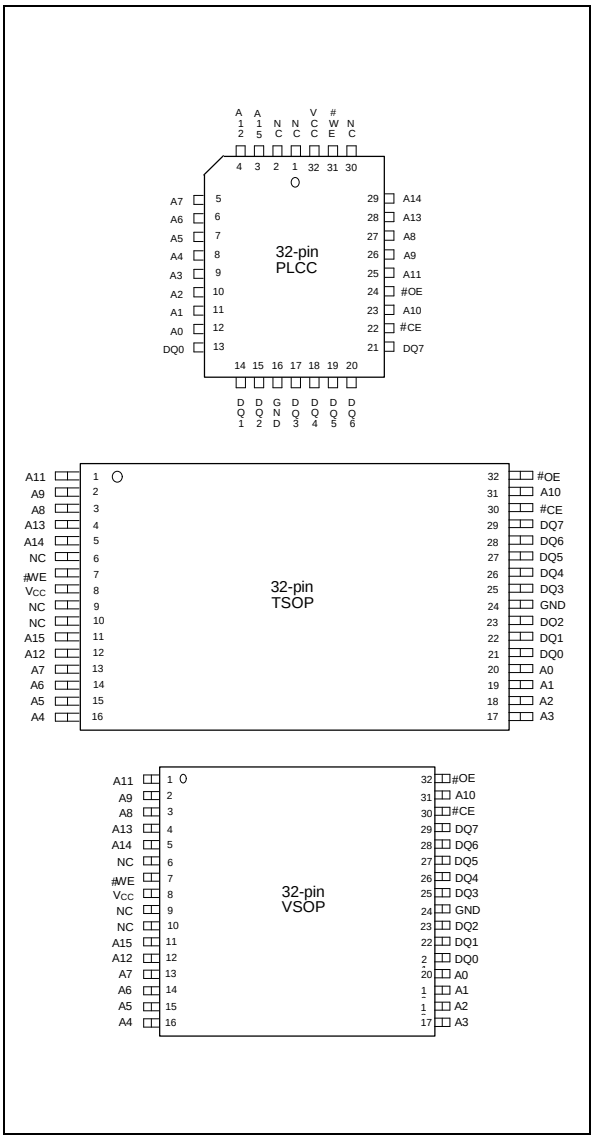

BLOCK DIAGRAM

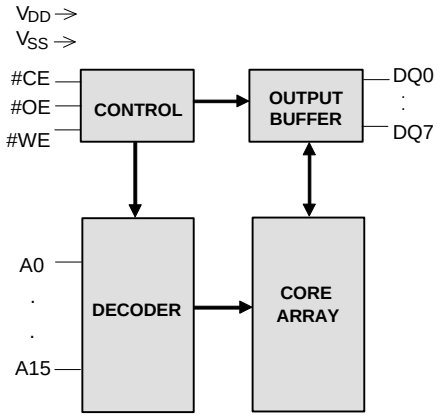

PIN DESCRIPTION

SYMBOL	PIN NAME
A0 – A15	Address Inputs
DQ0 – DQ7	Data Inputs/Outputs
#CE	Chip Enable
#OE	Output Enable
#WE	Write Enable
VCC	Power Supply
GND	Ground
NC	No Connection

FUNCTIONAL DESCRIPTION

Read Mode

The read operation of the W29EE512 is controlled by #CE and #OE, both of which have to be low for the host to obtain data from the outputs. #CE is used for device selection. When #CE is high, the chip is de-selected and only standby power will be consumed. #OE is the output control and is used to gate data from the output pins. The data bus is in high impedance state when either #CE or #OE is high. Refer to the timing waveforms for further details.

Page Write Mode

The W29EE512 is programmed on a page basis. Every page contains 128 bytes of data. If a byte of data within a page is to be changed, data for the entire page must be loaded into the device. Any byte that is not loaded will be erased to "FFh" during programming of the page.

The write operation is initiated by forcing #CE and #WE low and #OE high. The write procedure consists of two steps. Step 1 is the byte-load cycle, in which the host writes to the page buffer of the device. Step 2 is an internal programming cycle, during which the data in the page buffers are simultaneously written into the memory array for non-volatile storage.

During the byte-load cycle, the addresses are latched by the falling edge of either #CE or #WE, whichever occurs last. The data are latched by the rising edge of either #CE or #WE, whichever occurs first. If the host loads a second byte into the page buffer within a byte-load cycle time (T_{BLC}) of 200 µS, after the initial byte-load cycle, the W29EE512 will stay in the page load cycle. Additional bytes can then be loaded consecutively. The page load cycle will be terminated and the internal programming cycle will start if no additional byte is loaded into the page buffer A_7 to A_{15} specify the page address. All bytes that are loaded into the page buffer must have the same page address. A_0 to A_6 specify the byte address within the page. The bytes may be loaded in any order; sequential loading is not required.

In the internal programming cycle, all data in the page buffers, i.e., 128 bytes of data, are written simultaneously into the memory array. Before the completion of the internal programming cycle, the host is free to perform other tasks such as fetching data from other locations in the system to prepare to write the next page.

Software-protected Data Write

The device provides a JEDEC-approved optional software-protected data write. Once this scheme is enabled, any write operation requires a series of three-byte program commands (with specific data to a specific address) to be performed before the data load operation. The three-byte load command sequence begins the page load cycle, without which the write operation will not be activated. This write scheme provides optimal protection against inadvertent write cycles, such as cycles triggered by noise during system power-up and power-down.

The W29EE512 is shipped with the software data protection enabled. To enable the software data protection scheme, perform the three-byte command cycle at the beginning of a page load cycle. The device will then enter the software data protection mode, and any subsequent write operation must be preceded by the three-byte program command cycle. Once enabled, the software data protection will remain enabled unless the disable commands are issued. A power transition will not reset the software data protection feature. To reset the device to unprotected mode, a six-byte command sequence is required.

Hardware Data Protection

The integrity of the data stored in the W29EE512 is also hardware protected in the following ways:

(1) Noise/Glitch Protection: A #WE pulse of less than 15 nS in duration will not initiate a write cycle.

(2) V_{CC} Power Up/Down Detection: The programming and read operation are inhibited when V_{CC} is less than 2.8V.

(3) Write Inhibit Mode: Forcing #OE low, #CE high, or #WE high will inhibit the write operation. This prevents inadvertent writes during power-up or power-down periods.

Data Polling (DQ_7)-Write Status Detection

The W29EE512 includes a data polling feature to indicate the end of a programming cycle. When the W29EE512 is in the internal programming cycle, any attempt to read DQ_7 of the last byte loaded during the page/byte-load cycle will receive the complement of the true data. Once the programming cycle is completed. DQ_7 will show the true data.

Toggle Bit (DQ_6)-Write Status Detection

In addition to data polling, the W29EE512 provides another method for determining the end of a program cycle. During the internal programming cycle, any consecutive attempts to read DQ_6 will produce alternating 0's and 1's. When the programming cycle is completed, this toggling between 0's and 1's will stop. The device is then ready for the next operation.

5-Volt-only Software Chip Erase

The chip-erase mode can be initiated by a six-byte command sequence. After the command loading cycles, the device enters the internal chip erase mode, which is automatically timed and will be completed in 50 mS. The host system is not required to provide any control or timing during this operation.

Product Identification

The product ID operation outputs the manufacturer code and device code. Programming equipment automatically matches the device with its proper erase and programming algorithms.

The manufacturer and device codes can be accessed by software or hardware operation. In the software access mode, a six-byte command sequence can be used to access the product ID. A read from address 0000H outputs the manufacturer code (DAh). A read from address 0001H outputs the device code (C8h). The product ID operation can be terminated by a three-byte command sequence.

In the hardware access mode, access to the product ID is activated by forcing #CE and #OE low, #WE high, and raising A9 to 12 volts.

TABLE OF OPERATING MODES

Operating Mode Selection


(Operating Range = 0 to 70° C (Ambient Temperature), V_{CC} = 5V ±10%, V_{SS} = 0V, V_{HH} = 12V)

MODE	PINS				
	#CE	#OE	#WE	ADDRESS	DQ.
Read	V_{IL}	V_{IL}	V_{IH}	A_{IN}	Dout
Write	V_{IL}	V_{IH}	V_{IL}	A_{IN}	Din
Standby	V_{IH}	X	X	X	High Z
Write Inhibit	X	V_{IL}	X	X	High Z/D_{OUT}
	X	X	V_{IH}	X	High Z/D_{OUT}
Output Disable	X	V_{IH}	X	X	High Z
5-Volt Software Chip Erase	V_{IL}	V_{IH}	V_{IL}	A_{IN}	D_{IN}
Product ID	V_{IL}	V_{IL}	V_{IH}	$A_0 = V_{IL}$; $A_1 – A_{15} = V_{IL}$; $A_9 = V_{HH}$	Manufacturer Code DA (Hex)
	V_{IL}	V_{IL}	V_{IH}	$A_0 = V_{IH}$; $A_1 – A_{15} = V_{IL}$; $A_9 = V_{HH}$	Device Code C8 (Hex)

Command Codes for Software Data Protection

BYTE SEQUENCE	TO ENABLE PROTECTION		TO DISABLE PROTECTION	
	ADDRESS	DATA	ADDRESS	DATA
0 Write	5555H	AAH	5555H	AAH
1 Write	2AAAH	55H	2AAAH	55H
2 Write	5555H	A0H	5555H	80H
3 Write	-	-	5555H	AAH
4 Write	-	-	2AAAH	55H
5 Write	-	-	5555H	20H

Software Data Protection Acquisition Flow

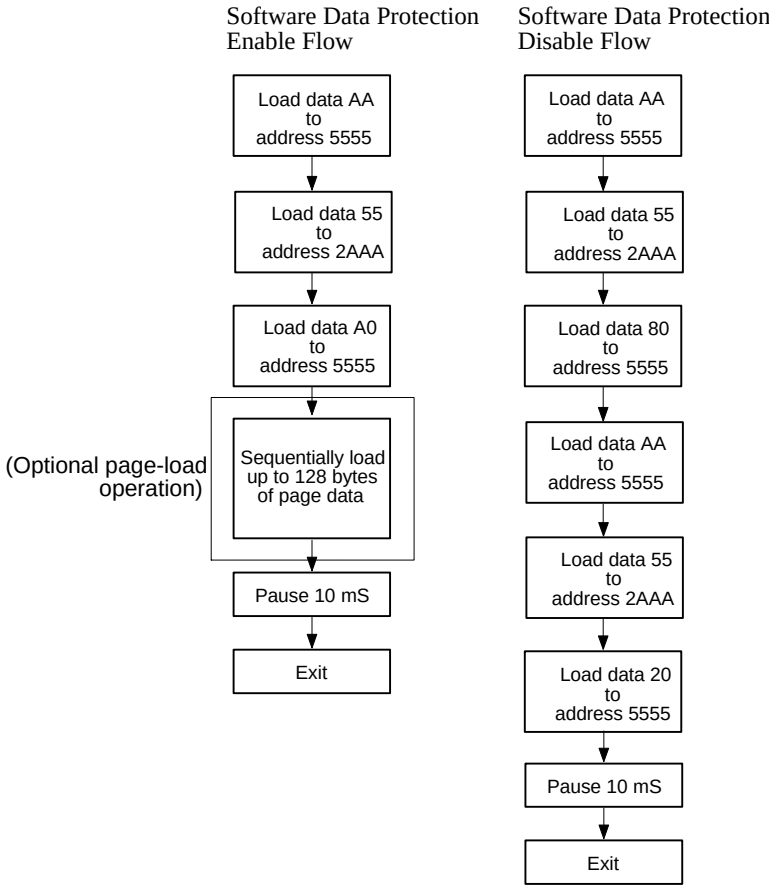


Notes for software program code:
Data Format: DQ7 – DQ0 (Hex)
Address Format: A14 – A0 (Hex)

Command Codes for Software Chip Erase

BYTE SEQUENCE	ADDRESS	DATA
0 Write	5555H	AAH
1 Write	2AAAH	55H
2 Write	5555H	80H
3 Write	5555H	AAH
4 Write	2AAAH	55H
5 Write	5555H	10H

Software Chip Erase Acquisition Flow

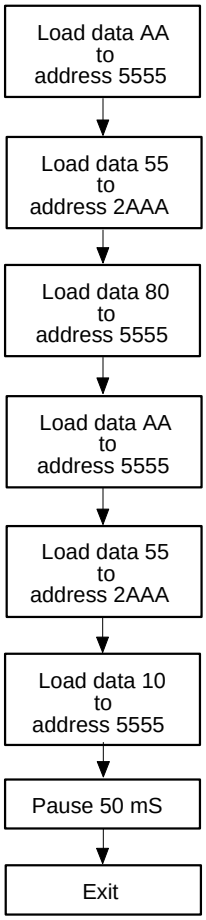


Notes for software chip erase:
Data Format: DQ7 – DQ0 (Hex)
Address Format: A14 – A0 (Hex)

Command Codes for Product Identification

BYTE SEQUENCE	ALTERNATE SOFTWARE (5) PRODUCT IDENTIFICATION ENTRY		SOFTWARE PRODUCT IDENTIFICATION ENTRY		SOFTWARE PRODUCT IDENTIFICATION EXIT	
	ADDRESS	DATA	ADDRESS	DATA	ADDRESS	DATA
0 Write	5555H	AAH	5555H	AAH	5555H	AAH
1 Write	2AAAH	55H	2AAAH	55H	2AAAH	55H
2 Write	5555H	90H	5555H	80H	5555H	F0H
3 Write	-	-	5555H	AAH	-	-
4 Write	-	-	2AAAH	55H	-	-
5 Write	-	-	5555H	60H	-	-
	Pause 10 µS		Pause 10 µS		Pause 10 µS	

Software Product Identification Acquisition Flow

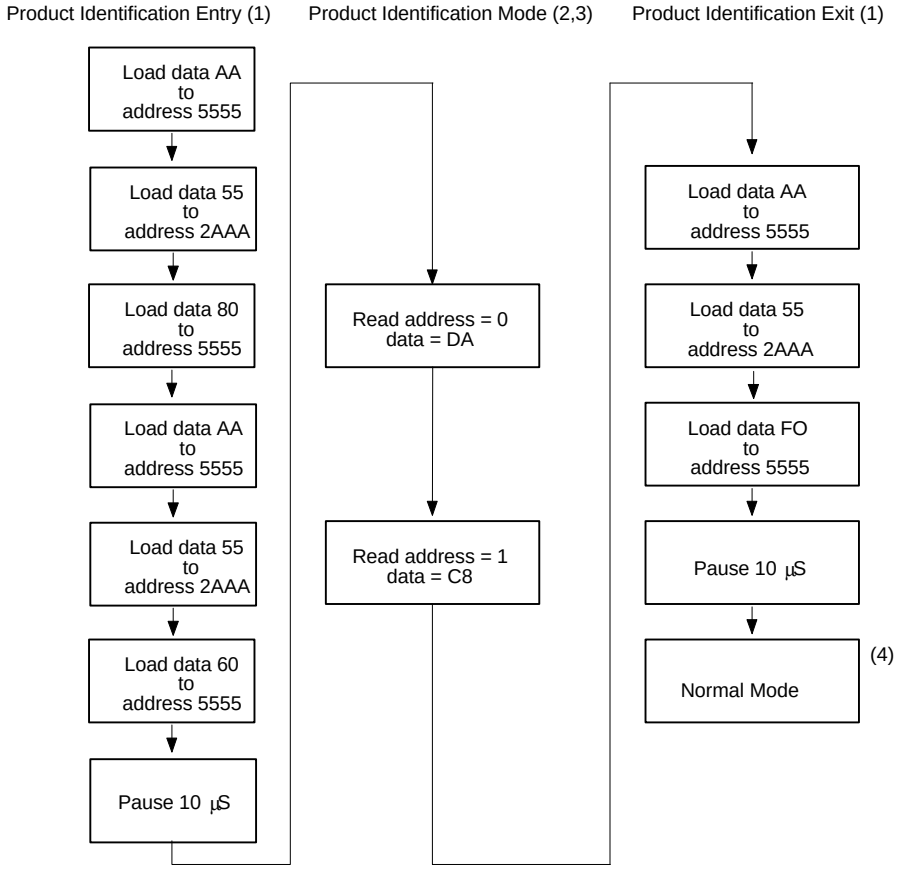

Notes for software product identification:

(1) Data format: DQ7 – DQ0 (Hex); address format: A14 – A0 (Hex).

(2) A1 – A16 = V_{IL}; manufacture code is read for A0 = V_{IL}; device code is read for A0 = V_{IH}.

(3) The device does not remain in identification mode if power down.

(4) The device returns to standard operation mode.

(5) This product supports both the JEDEC standard 3 byte command code sequence and original 6 byte command code sequence. For new designs, Winbond recommends that the 3 byte command code sequence be used.

DC CHARACTERISTICS

Absolute Maximum Ratings

PARAMETER	RATING	UNIT
Power Supply Voltage to V_{SS} Potential	-0.5 to +7.0	V
Operating Temperature	0 to +70	°C
Storage Temperature	-65 to +150	°C
D.C. Voltage on Any Pin to Ground Potential except A9	-0.5 to V_{CC} +1.0	V
Transient Voltage (¡ 20 nS) on Any Pin to Ground Potential	-1.0 to V_{CC} +1.0	V
Voltage on A9 and #OE Pin to Ground Potential	-0.5 to 12.5	V

Note: Exposure to conditions beyond those listed under Absolute Maximum Ratings may adversely affect the life and reliability of the device.

Operating Characteristics

(V_{CC} = 5.0V ±10%, V_{SS} = 0V, T_A = 0 to 70° C)

PARAMETER	SYM.	TEST CONDITIONS	LIMITS			UNIT
			MIN.	TYP.	MAX.	
Power Supply Current	I_{CC}	#CE = #OE = V_{IL}, #WE = V_{IH}, all I/Os open Address inputs = V_{IL}/V_{IH}, at f = 5 MHz	-	-	50	mA
Standby Vcc Current (TTL Input)	I_{SB1}	#CE = V_{IH}, all I/Os open Other inputs = V_{IL}/V_{IH}	-	2	3	mA
Standby Vcc Current (CMOS Input)	I_{SB2}	#CE = V_{CC} -0.3V, all I/Os open Other inputs = V_{CC} -0.3V/GND	-	20	100	µA
Input Leakage Current	I_{LI}	V_{IN} = GND to V_{CC}	-	-	10	µA
Output Leakage Current	I_{LO}	V_{IN} = GND to V_{CC}	-	-	10	µA
Input Low Voltage	V_{IL}	-	-	-	0.8	V
Input High Voltage	V_{IH}	-	2.0	-	-	V
Output Low Voltage	V_{OL}	I_{OL} = 2.1 mA	-	-	0.45	V
Output High Voltage	V_{OH1}	I_{OH} = -0.4 mA	2.4	-	-	V
Output High Voltage CMOS	V_{OH2}	I_{OH} = -100 µA; V_{CC} = 4.5V	4.2	-	-	V

Power-up Timing

PARAMETER	SYMBOL	TYPICAL	UNIT
Power-up to Read Operation	$T_{PU.READ}$	100	µS
Power-up to Write Operation	$T_{PU.WRITE}$	5	mS

CAPACITANCE

(V_{CC} = 5.0V, T_A = 25° C, f = 1 MHz)


PARAMETER	SYMBOL	CONDITIONS	MAX.	UNIT
I/O Pin Capacitance	$C_{I/O}$	$V_{I/O}$ = 0V	12	pF
Input Capacitance	C_{IN}	V_{IN} = 0V	6	pF

AC CHARACTERISTICS

AC Test Conditions

PARAMETER	CONDITIONS
Input Pulse Levels	0V to 3V
Input Rise/Fall Time	< 5 nS
Input/Output Timing Level	1.5V/1.5V
Output Load	1 TTL Gate and C_L = 100 pF/30 pF

AC Test Load and Waveform

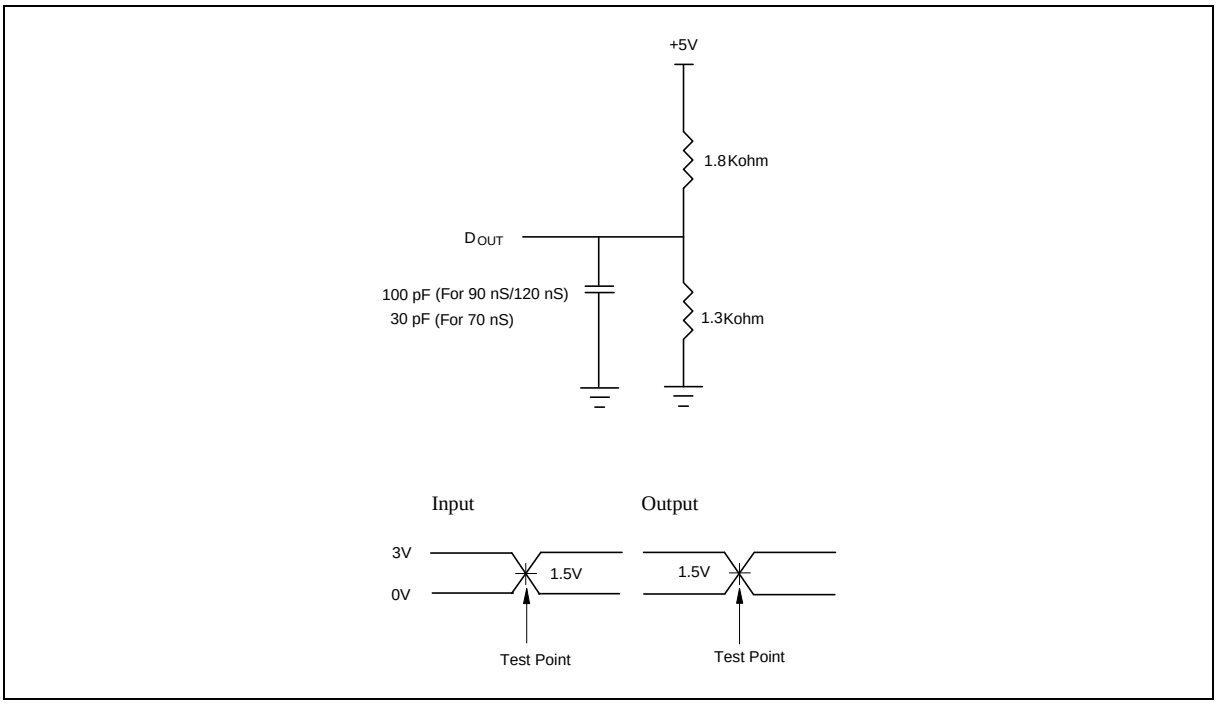

Read Cycle Timing Parameters

(V_{CC} = 5.0V ±10%, V_{CC} = 5.0 ±5% for 70 nS, V_{SS} = 0V, T_A = 0 to 70° C)

PARAMETER	SYM.	W29EE512-70		W29EE512-90		W29EE512-12		UNIT
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	
Read Cycle Time	T_{RC}	70	-	90	-	120	-	nS
Chip Enable Access Time	T_{CE}	-	70	-	90	-	120	nS
Address Access Time	T_{AA}	-	70	-	90	-	120	nS
Output Enable Access Time	T_{OE}	-	35	-	40	-	50	nS
#CE High to High-Z Output	T_{CHZ}	-	25	-	25	-	30	nS
#OE High to High-Z Output	T_{OHZ}	-	25	-	25	-	30	nS
Output Hold from Address Change	T_{OH}	0	-	0	-	0	-	nS

Byte/Page-write Cycle Timing Parameters

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Write Cycle (Erase and Program)	T_{WC}	-	-	10	mS
Address Setup Time	T_{AS}	0	-	-	nS
Address Hold Time	T_{AH}	50	-	-	nS
#WE and #CE Setup Time	T_{CS}	0	-	-	nS
#WE and #CE Hold Time	T_{CH}	0	-	-	nS
#OE High Setup Time	T_{OES}	0	-	-	nS
#OE High Hold Time	T_{OEH}	0	-	-	nS
#CE Pulse Width	T_{CP}	90	-	-	nS
#WE Pulse Width	T_{WP}	90	-	-	nS
#WE High Width	T_{WPH}	100	-	-	nS
Data Setup Time	T_{DS}	35	-	-	nS
Data Hold Time	T_{DH}	0	-	-	nS
Byte Load Cycle Time	T_{BLC}	-	-	200	µS

Notes: All AC timing signals observe the following guidelines for determining setup and hold times:

(1) High level signal's reference level is V_{IH}.

(2) Low level signal's reference level is V_{IL}.

#DATA Polling Characteristics (1)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Data Hold Time	T_{DH}	10	-	-	nS
#OE Hold Time	T_{OEH}	10	-	-	nS
#OE to Output Delay (2)	T_{OE}	-	-	-	nS
Write Recovery Time	T_{WR}	0	-	-	nS

Notes:

(1) These parameters are characterized and not 100% tested.

(2) See T_{OE} spec in A.C. Read Cycle Timing Parameters.

Toggle Bit Characteristics (1)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Data Hold Time	T_{DH}	10	-	-	nS
#OE Hold Time	T_{OEH}	10	-	-	nS
#OE to Output Delay (2)	T_{OE}	-	-	-	nS
#OE High Pulse	T_{OEHP}	150	-	-	nS
Write Recovery Time	T_{WR}	0	-	-	nS


Notes:

(1) These parameters are characterized and not 100% tested.


(2) See T_{OE} spec in A.C. Read Cycle Timing Parameters.

TIMING WAVEFORMS

Read Cycle Timing Diagram

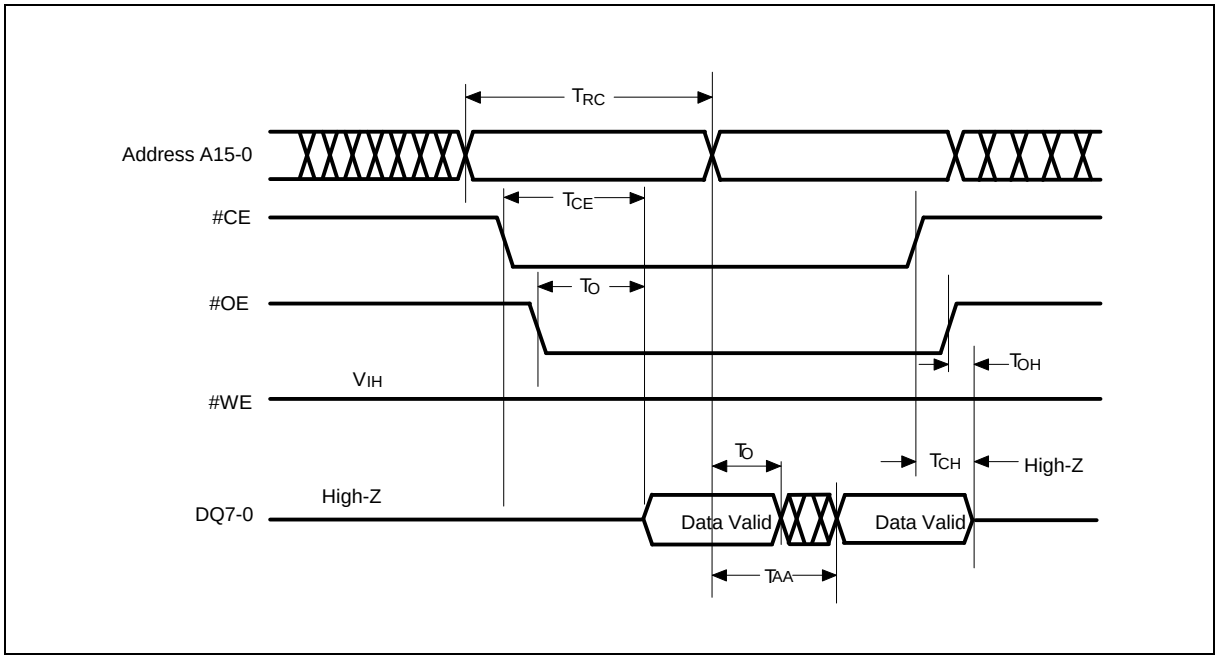


#WE Controlled Write Cycle Timing Diagram

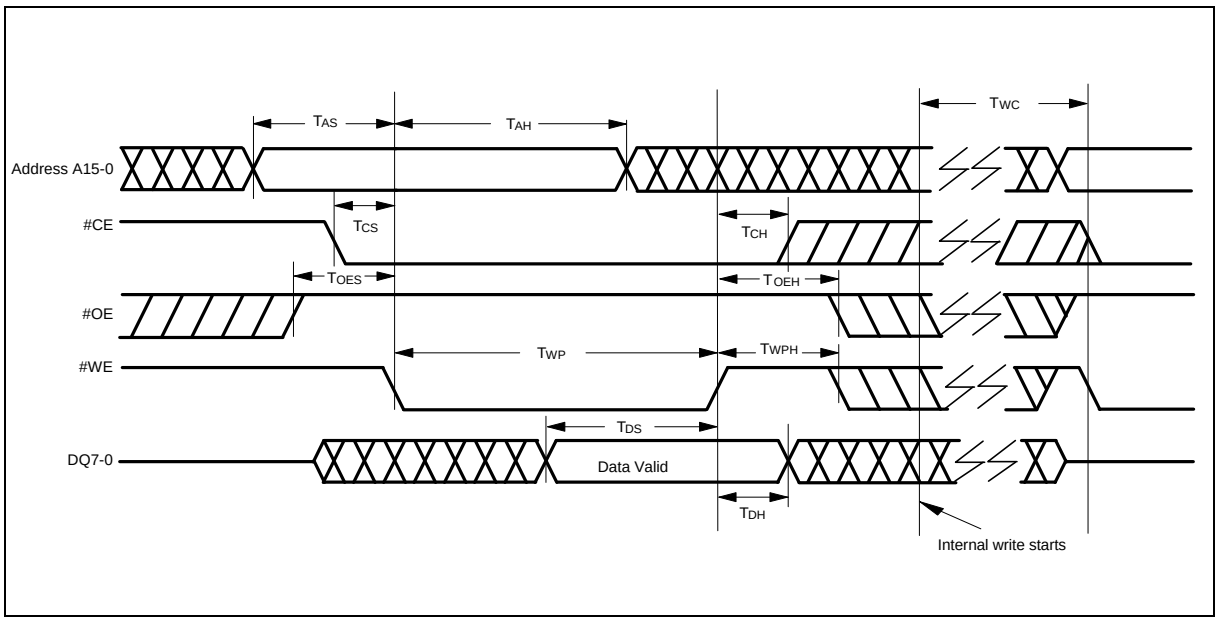


Timing Waveforms, continued

#CE Controlled Write Cycle Timing Diagram

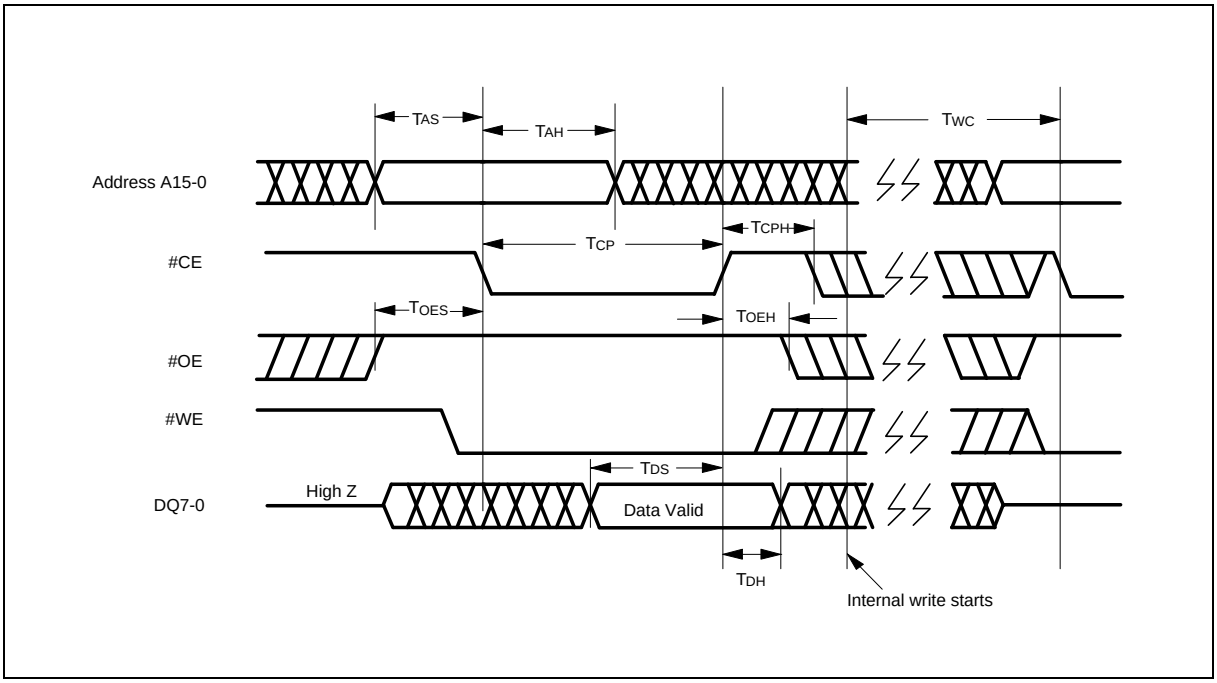


Page Write Cycle Timing Diagram

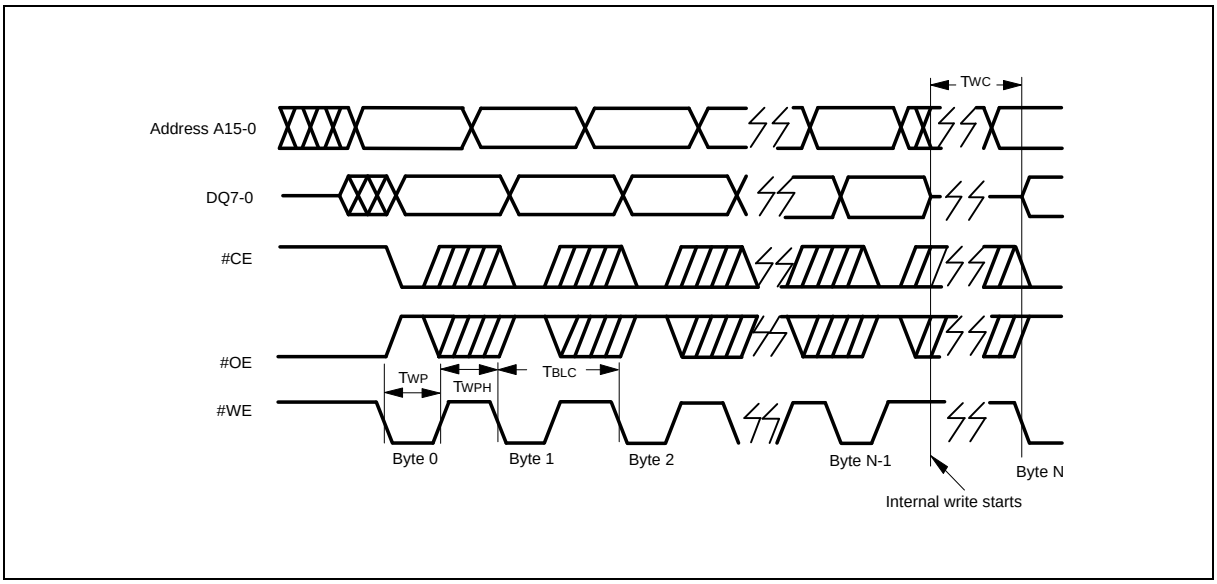


Timing Waveforms, continued

#DATA Polling Timing Diagram

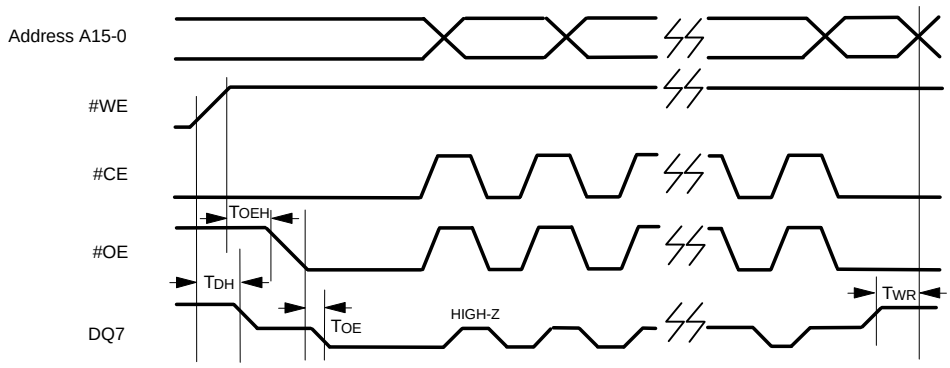


Toggle Bit Timing Diagram

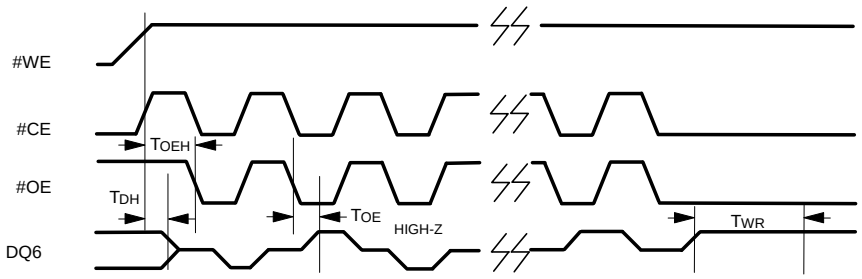


Timing Waveforms, continued

Page Write Timing Diagram Software Data Protection Mode

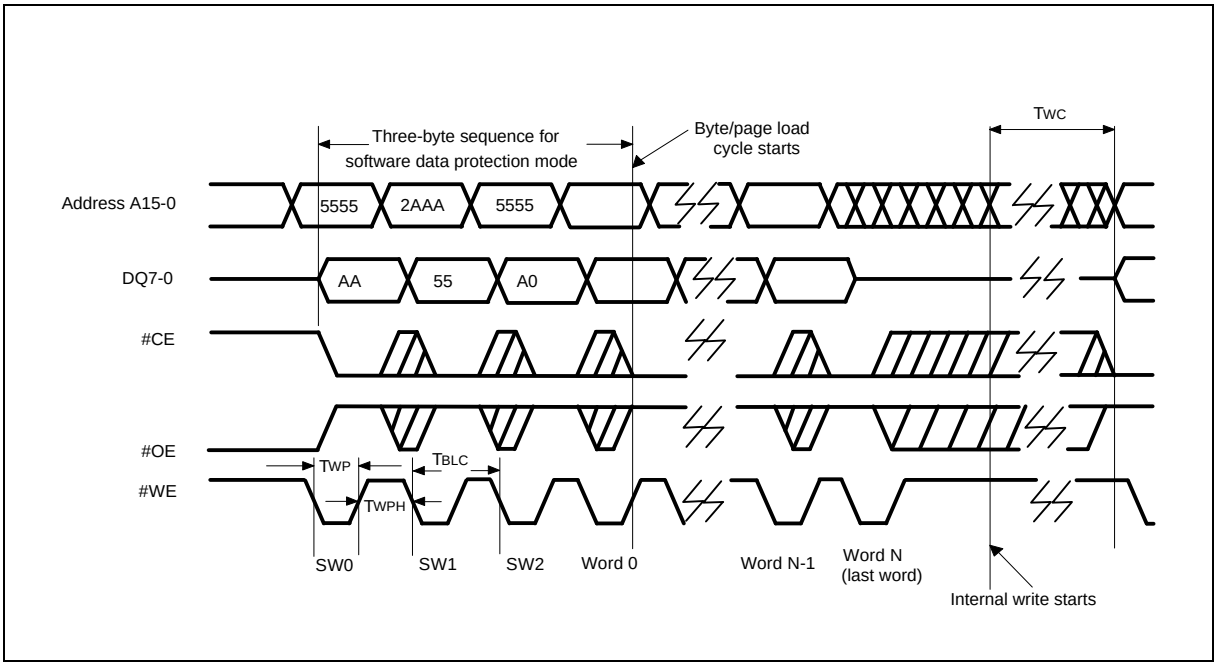


Reset Software Data Protection Timing Diagram

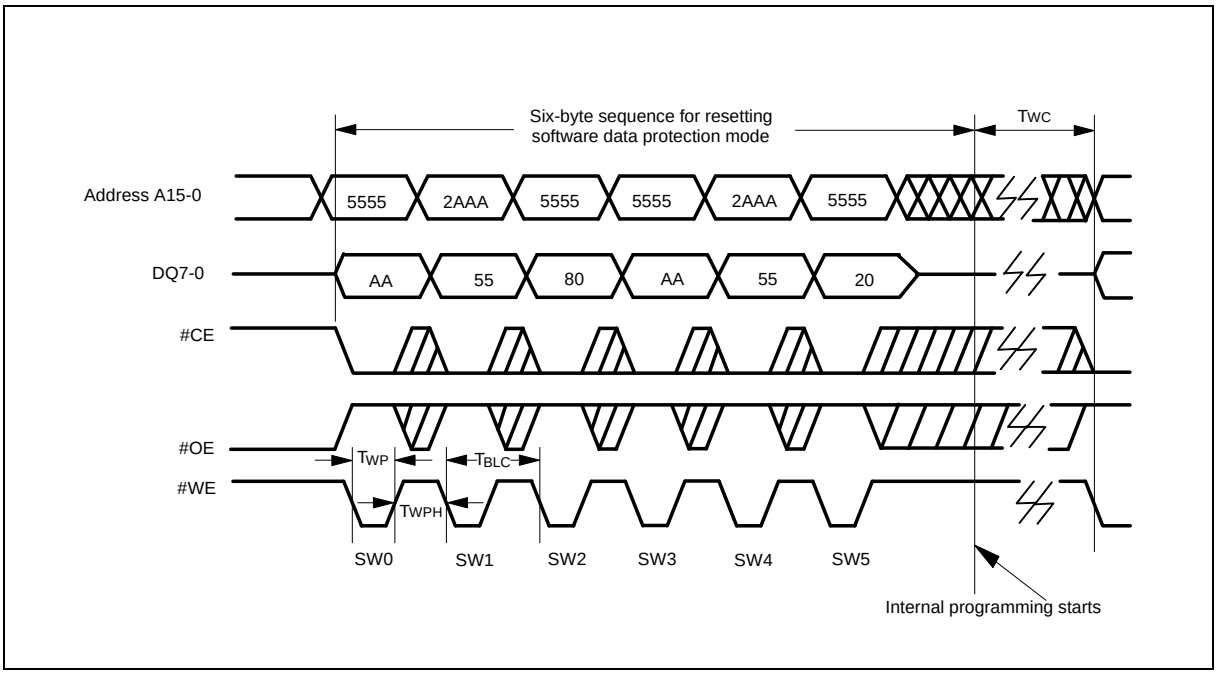

Timing Waveforms, continued

5-Volt-only Software Chip Erase Timing Diagram

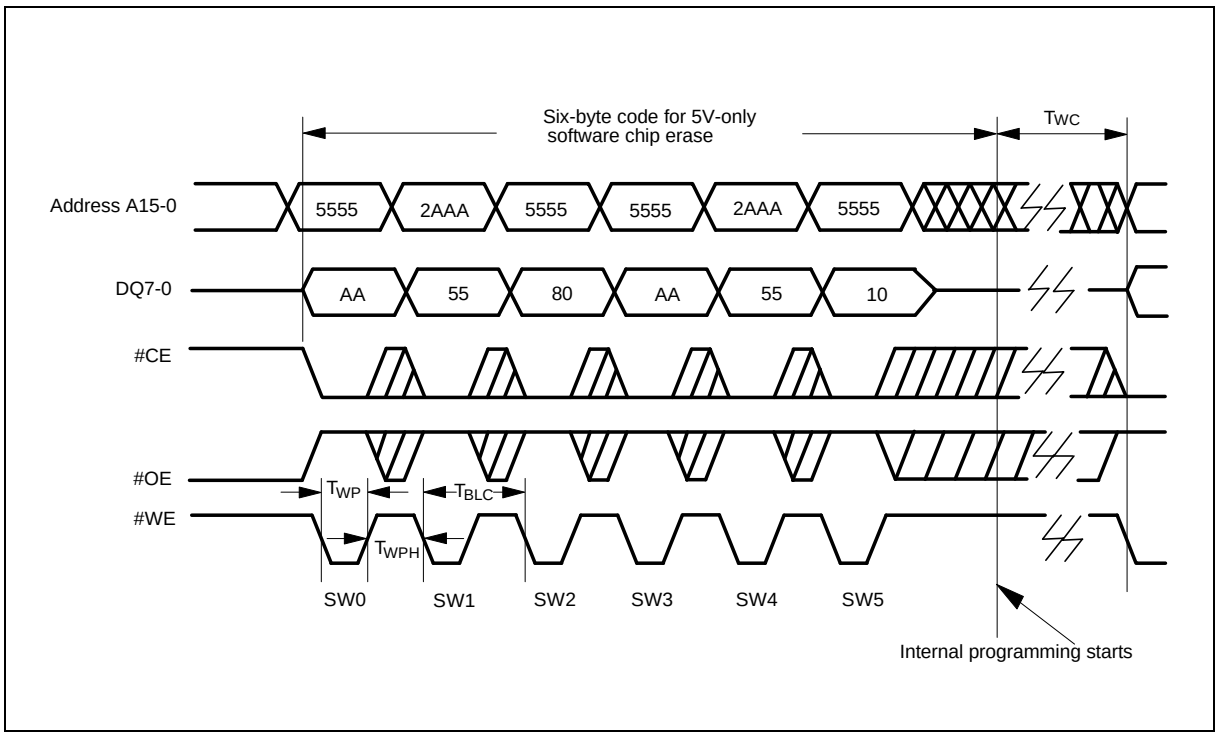

ORDERING INFORMATION

PART NO.	ACCESS TIME (nS)	POWER SUPPLY CURRENT MAX. (mA)	STANDBY Vcc CURRENT MAX. (μA)	PACKAGE	CYCLE
W29EE512P-70	70	50	100	32-pin PLCC	1K
W29EE512P-90	90	50	100	32-pin PLCC	1K
W29EE512P-12	120	50	100	32-pin PLCC	1K
W29EE512T-70	70	50	100	Type one TSOP	1K
W29EE512T-90	90	50	100	Type one TSOP	1K
W29EE512T-12	120	50	100	Type one TSOP	1K
W29EE512Q-70	70	50	100	Type one VSOP	1K
W29EE512Q-90	90	50	100	Type one VSOP	1K
W29EE512P-70B	70	50	100	32-pin PLCC	10K
W29EE512P-90B	90	50	100	32-pin PLCC	10K
W29EE512P-12B	120	50	100	32-pin PLCC	10K
W29EE512T-70B	70	50	100	Type one TSOP	10K
W29EE512T-90B	90	50	100	Type one TSOP	10K
W29EE512T-12B	120	50	100	Type one TSOP	10K
W29EE512Q-70B	70	50	100	Type one VSOP	10K
W29EE512Q-90B	90	50	100	Type one VSOP	10K

Notes:

1. Winbond reserves the right to make changes to its products without prior notice.
2. Purchasers are responsible for performing appropriate quality assurance testing on products intended for use in applications where personal injury might occur as a consequence of product failure.

HOW TO READ THE TOP MARKING

Example: The top marking of 32L-PLCC W29EE512P-70B



1st line: winbond logo

2nd line: the part number: W29EE512P-70B

3rd line: the lot number

4th line: the tracking code: 149 O B RA

149: Packages made in '01, week 49

O: Assembly house ID: A means ASE, O means OSE, ... etc.


B: IC revision; A means version A, B means version B, ... etc.

RA: Process code

Winbond Electronics Corp.

PACKAGE DIMENSIONS

32-pin PLCC

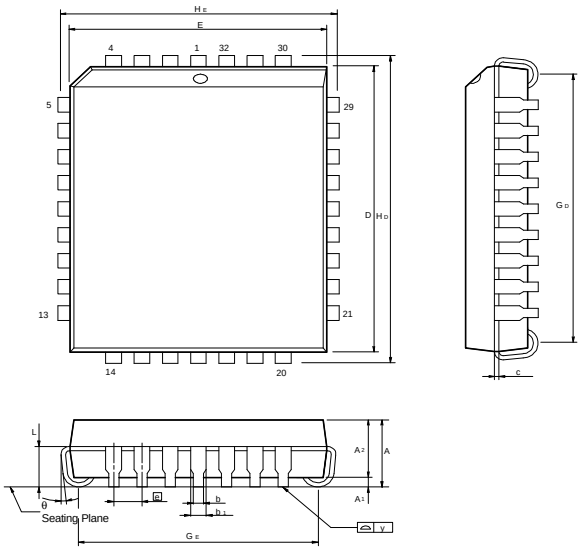


Symbol	Dimension In Inches			Dimension In mm		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	—	—	0.140	—	—	3.56
A_1	0.020	—	—	0.50	—	—
A_2	0.105	0.110	0.115	2.67	2.80	2.93
b_1	0.026	0.028	0.032	0.66	0.71	0.81
b	0.016	0.018	0.022	0.41	0.46	0.56
c	0.008	0.010	0.014	0.20	0.25	0.35
D	0.547	0.550	0.553	13.89	13.97	14.05
E	0.447	0.450	0.453	11.35	11.43	11.51
e	0.044	0.050	0.056	1.12	1.27	1.42
G_D	0.490	0.510	0.530	12.45	12.95	13.46
G_E	0.390	0.410	0.430	9.91	10.41	10.92
H_D	0.585	0.590	0.595	14.86	14.99	15.11
H_E	0.485	0.490	0.495	12.32	12.45	12.57
L	0.075	0.090	0.095	1.91	2.29	2.41
y	—	—	0.004	—	—	0.10
θ	0 °	—	10 °	0 °	—	10 °

Notes:

1. Dimensions D & E do not include interlead flash.
2. Dimension b does not include dambar protrusion/intrusion.
3. Controlling dimension: Inches.
4. General appearance spec. should be based on fina visual inspection sepc.

32-pin TSOP

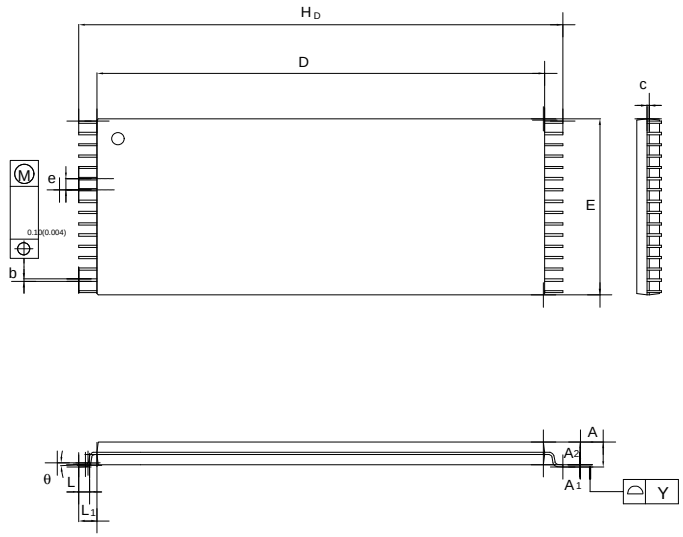


Symbol	Dimension In Inches			Dimension In mm		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	—	—	0.047	—	—	1.20
A_1	0.002	—	0.006	0.05	—	0.15
A_2	0.037	0.039	0.041	0.95	1.00	1.05
b	0.007	0.008	0.009	0.17	0.20	0.23
c	0.005	0.006	0.007	0.12	0.15	0.17
D	0.720	0.724	0.728	18.30	18.40	18.50
E	0.311	0.315	0.319	7.90	8.00	8.10
H_D	0.780	0.787	0.795	19.80	20.00	20.20
e	—	0.020	—	—	0.50	—
L	0.016	0.020	0.024	0.40	0.50	0.60
L_1	—	0.031	—	—	0.80	—
Y	0.000	—	0.004	0.00	—	0.10
θ	1	3	5	1	3	5

Note:

Controlling dimension: Millimeters

Package Dimensions, continued

32-pin VSOP

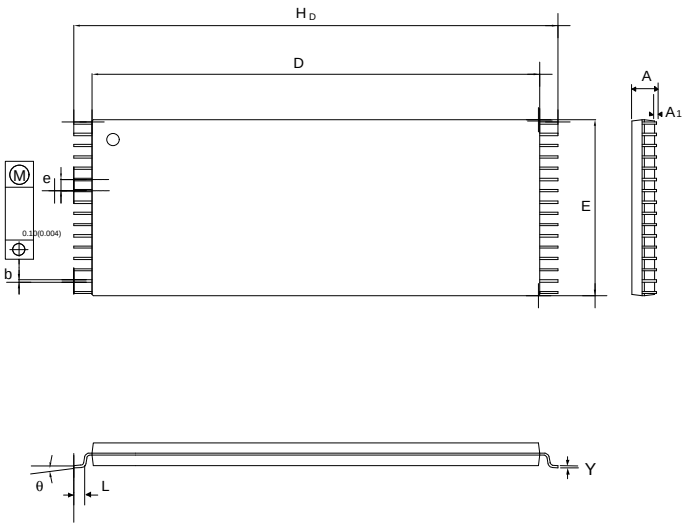

Symbol	Dimension In Inches			Dimension In mm		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	—	—	0.047	—	—	1.20
A_1	0.002	—	0.006	0.05	—	0.15
b	0.006	0.008	0.010	0.15	0.20	0.25
D	0.484	0.488	0.492	12.30	12.40	12.50
E	0.311	0.315	0.319	7.90	8.00	8.10
H_D	0.543	0.551	0.559	13.80	14.00	14.20
e	—	0.020	—	—	0.50	—
L	0.020	0.024	0.028	0.50	0.60	0.70
Y	0.004	—	0.008	0.10	—	0.20
θ	0	—	5	0	—	5

Note:
Controlling dimension: Millimeters

VERSION HISTORY

VERSION	DATE	PAGE	DESCRIPTION
A5	Mar. 1998	6	Add. pause 10 mS
		7	Add. pause 50 mS
		8	Correct the time from 10 mS to 10 µS
		1, 2, 18, 19	Eliminate 600 mil DIP, 450 mil SOP packages
A6	Oct. 1999	1, 2, 18, 20	Add 32-pin VSOP package
		3, 11	Change Byte Load Cycle Time from 150 µS to 200 µS
A7	Feb. 18, 2002	4	Modify V_{CC} Power Up/Down Detection in Hardware Data Protection
		21	Add HOW TO READ THE TOP MARKING

Headquarters
No. 4, Creation Rd. III,
Science-Based Industrial Park,
Hsinchu, Taiwan
TEL: 886-3-5770066
FAX: 886-3-5665577
http://www.winbond.com.tw/

Winbond Electronics Corporation America
2727 North First Street, San Jose,
CA 95134, U.S.A.
TEL: 1-408-9436666
FAX: 1-408-5441798

Winbond Electronics (Shanghai) Ltd.
27F, 2299 Yan An W. Rd. Shanghai,
200336 China
TEL: 86-21-62365999
FAX: 86-21-62365998

Taipei Office
9F, No.480, Rueiguang Rd.,
Neihu Chiu, Taipei, 114,
Taiwan, R.O.C.
TEL: 886-2-8177-7168
FAX: 886-2-8751-3579

Winbond Electronics Corporation Japan
7F Daini-ueno BLDG, 3-7-18
Shinyokohama Kohoku-ku,
Yokohama, 222-0033
TEL: 81-45-4781881
FAX: 81-45-4781800

Winbond Electronics (H.K.) Ltd.
Unit 9-15, 22F, Millennium City,
No. 378 Kwun Tong Rd.,
Kowloon, Hong Kong
TEL: 852-27513100
FAX: 852-27552064

Please note that all data and specifications are subject to change without notice.
All the trade marks of products and companies mentioned in this data sheet belong to their respective owners.