


P.C.B LAYOUT(copper-side view)

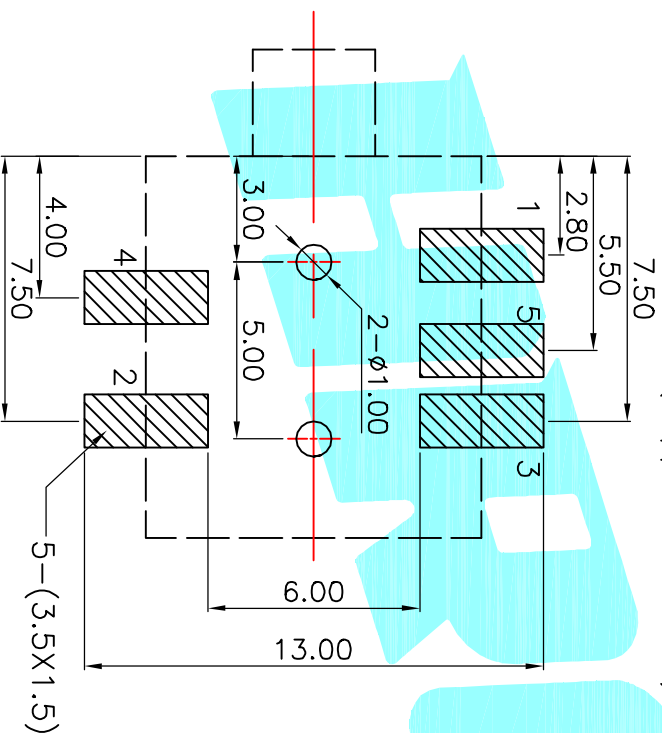

L=12.0	PJ-201-A	PJ-201-B
L=11.0	PJ-201-C	PJ-201-D
Schematic		
L=12.0	PJ-201-E	PJ-201-F
L=11.0	PJ-201-G	PJ-201-H
Schematic		

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3~20N
 Operating Life:5,000cycles

② Terminal	5	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM	PART NAME	TERN.O.	QTY.
APPROVALS		DATE	
DRAWN	J.X.Zhang	2013/11/11	

PHONE JACKS
 ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
APPROVALS			TOLERANCES ARE	30±0.1	±0.30	ANGLE
CHECKED			10~30	±0.20	UNIT: mm	SCALE: 1:1
DRAWN			5~10	±0.15	DRAWING NO.	PROJ. SHEET 1 OF 1
TITLE:			±Z'			
PART NO.						
PJ-201						