

# Low-Cost Single-Channel Color or Monochrome Image Acquisition

## NI PCI-1405

- Color or monochrome image acquisition
- 1 NTSC, PAL, RS-170, or CCIR input
- Partial image acquisition with onboard programmable region of interest
- Onboard pixel decimation
- Programmable gain and offset
- 1 external trigger/digital I/O line

### Operating Systems

- Windows 2000/NT/XP


### Recommended Software

- LabVIEW
- Measurement Studio
- Vision Development Module
- NI Vision Builder for Automated Inspection

### Driver Software (included)

- NI-IMAQ

NEW

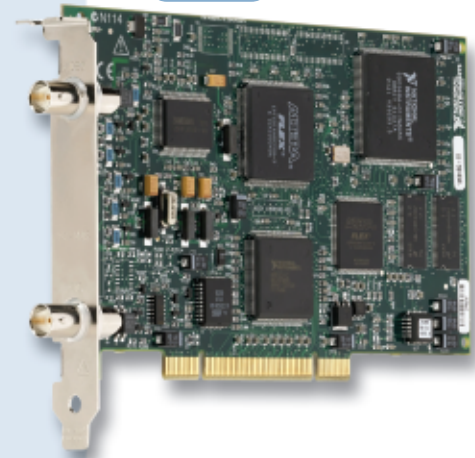

## Overview

For low-cost analog color image acquisition, National Instruments offers the PCI-1405, which acquires analog video input from standard color or monochrome cameras. The NI PCI-1405 comes with easy-to-use image acquisition driver software which can acquire, save and display images. Unlike multimedia “frame grabbers”, the PCI-1405 features increased image processing throughput, such as partial image acquisition with programmable region of interest.

## Easy-to-Use Driver Software

National Instruments NI-IMAQ driver level software offers the most comprehensive software interface for image acquisition. NI-IMAQ is included with the PCI-1405 board, as well as NI Measurement & Automation Explorer (MAX) for easy configuration of cameras. Using NI-IMAQ, you can quickly and easily acquire, save, and display images without low-level programming. You can program your image acquisition application in LabVIEW, LabWindows/CVI, and Measurement Studio. In addition, NI-IMAQ controls the PCI-1405 digital I/O line.

## Performance Gains with Partial Image Acquisition

The PCI-1405 includes features that improve overall image acquisition and image processing speed. You can choose to acquire only a portion of the image using the onboard programmable ROI

(region of interest) feature. You can configure the size of the acquired image using MAX, or use the ROI tools in the NI-IMAQ driver software to transfer only a subset of the image to PC memory for processing. Partial image scanning results in fewer pixels to process. For example, using partial image scanning, you can reduce a 640 by 480 image to a 400 by 400 image and increase your processing speed by operating on 48 percent fewer pixels.

## Hardware PCI Interface

The PCI bus is the electrical interface for the PCI-1405. The National Instruments custom MITE ASIC for interfacing to the PCI bus offers the highest image acquisition performance available. The MITE ASIC can transfer data at a maximum sustained rate of 100 MB/s in master mode to maximize the use of the available PCI bandwidth.

## Onboard Memory

The PCI-1405 has 16 MB of onboard memory, useful for temporary storage of images being transferred to the PCI bus.

## Trigger and Strobe

You can use the digital I/O line as an input to trigger image acquisition or as an output to control solenoids, solid-state relays, or strobes.

# Low-Cost Single-Channel Color or Monochrome Image Acquisition

## Programmable Gain and Offset

The PCI-1405 has programmable gain and offset circuitry for optimizing the input signal range.

## I/O Connector and Cabling

Two external BNC connectors are used for the video source and digital I/O line. The PCI-1405 is shipped with a 2 m BNC cable.

## Color Pattern Matching

Use color pattern matching to locate quickly known reference patterns, or fiducials, in a color image. With color pattern matching, you create a model or template of an object. The search tool first

scans the image to match the color distribution, and then scores the match for shape. The score relates to how closely the model matches the pattern found. You should use color pattern matching to locate reference patterns that the color and spatial information in the pattern fully describe. Color can often simplify a monochrome problem by improving contrast or separation.

## Ordering Information

NI PCI-1405 .....778838-01  
Includes NI-IMAQ software and 2 m IMAQ-BNC-1 cable

## Specifications

Typical for 25 °C unless otherwise noted.

### Available Formats

RS-170, NTSC.....	30 frames/s interlaced
CCIR-601, PAL.....	25 frames/s interlaced

### Video Input

Quantity.....	1 monochrome or color
Video 0.....	Single-ended (BNC)
Input impedance.....	75 Ω
Bandwidth.....	Typical 20 MHz (-3dB)
Input full-scale range.....	2 LSB <sub>rms</sub> maximum

### A/D Conversion

Gray levels.....	256 (8 bits)
DNL.....	±1 LSB maximum
RMS noise.....	<0.5 LSB <sub>rms</sub>
SNR.....	Typical 48 dB

### External Synchronization and Trigger Signals

Trigger sense.....	TTL
Trigger polarity.....	Programmable (positive or negative)
Minimum detectable pulse width.....	20 ns

V <sub>IH</sub> (TTL).....	2 V
V <sub>IL</sub> (TTL).....	0.8 V

### Pixel Clock

RS-170, NTSC.....	12.27 MHz ±5%
CCIR, PAL.....	14.75 MHz ±5%
Pixel jitter.....	<2 ns
Lock time.....	<1 frame

### PCI Interface

Bus interface.....	Master, slave
Bus-master performance.....	132 MB/s (ideal)

### Power Requirement

+5 VDC (±5%).....	1.25 A
+12 VDC (±5%).....	<200 mA

### Physical


Dimensions.....	10.7 by 17.5 cm (4.2 by 6.9 in.)
-----------------	----------------------------------

### Environment

Operating temperature.....	0 to 55 °C
Storage temperature.....	-20 to 70 °C
Relative humidity.....	5 to 90%, noncondensing

# NI Services and Support

NI has the services and support to meet your needs around the globe and through the application life cycle – from planning and development through deployment and ongoing maintenance. We offer services and service levels to meet customer requirements in research, design, validation, and manufacturing. Visit [ni.com/services](http://ni.com/services).



## Training and Certification

NI training is the fastest, most certain route to productivity with our products. NI training can shorten your learning curve, save development time, and reduce maintenance costs over the application life cycle. We schedule instructor-led courses in cities worldwide, or we can hold a course at your facility. We also offer a professional certification program that identifies individuals who have high levels of skill and knowledge on using NI products. Visit [ni.com/training](http://ni.com/training).

## Professional Services

Our Professional Services Team is comprised of NI applications engineers, NI Consulting Services, and a worldwide NI Alliance Partner Program of more than 600 independent consultants and integrators. Services range from start-up assistance to turnkey system integration. Visit [ni.com/alliance](http://ni.com/alliance).



## OEM Support

We offer design-in consulting and product integration assistance if you want to use our products for OEM applications. For information about special pricing and services for OEM customers, visit [ni.com/oem](http://ni.com/oem).

## Local Sales and Technical Support

In offices worldwide, our staff is local to the country, giving you access to engineers who speak your language. NI delivers industry-leading technical support through online knowledge bases, our applications engineers, and access to 14,000 measurement and automation professionals within NI Developer Exchange forums. Find immediate answers to your questions at [ni.com/support](http://ni.com/support).

We also offer service programs that provide automatic upgrades to your application development environment and higher levels of technical support. Visit [ni.com/ssp](http://ni.com/ssp).

## Hardware Services

### NI Factory Installation Services

NI Factory Installation Services (FIS) is the fastest and easiest way to use your PXI or PXI/SCXI™ combination systems right out of the box. Trained NI technicians install the software and hardware and configure the system to your specifications. NI extends the standard warranty by one year on hardware components (controllers, chassis, modules) purchased with FIS. To use FIS, simply configure your system online with [ni.com/pxiadvisor](http://ni.com/pxiadvisor).

## Calibration Services

NI recognizes the need to maintain properly calibrated devices for high-accuracy measurements. We provide manual calibration procedures, services to recalibrate your products, and automated calibration software specifically designed for use by metrology laboratories. Visit [ni.com/calibration](http://ni.com/calibration).

## Repair and Extended Warranty

NI provides complete repair services for our products. Express repair and advance replacement services are also available. We offer extended warranties to help you meet project life-cycle requirements. Visit [ni.com/services](http://ni.com/services).



[ni.com](http://ni.com) • (800) 433-3488

National Instruments • Tel: (512) 683-0100 • Fax: (512) 683-9300 • [info@ni.com](mailto:info@ni.com)

© 2004 National Instruments Corporation. All rights reserved. LabVIEW, CVI, Measurement Studio, NI-IMAQ, and ni.com are trademarks of National Instruments. Product and company names listed are trademarks or trade names of their respective companies.