



A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

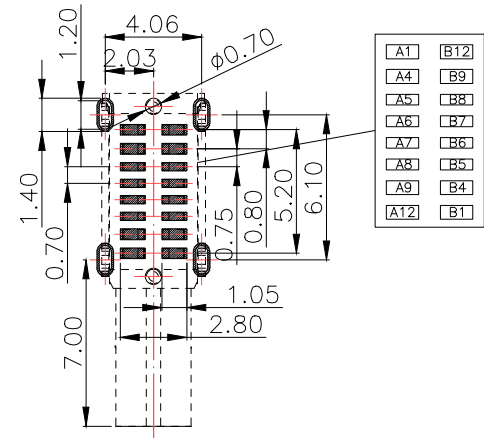





- 特性:
- 一、电气性能:EICTRICAL
 1. 额定电流:5.0A
 2. 接触阻抗:40 MILLIOHMS MAX
 3. 耐电压:100V AC / 1 mA MAX
 4. 绝缘阻抗:150V DC/100 MEGA OHMS MIN
 - 二、机械性能:
 1. 插入力:5~20N;拔出力:8~20N
 2. 使用寿命:10000次
 - 三、材料:MATERIAL
 1. 塑胶:LCP黑色 UL94V-0
 2. 端子:C7025 TM03 T=0.15 mm
 3. 外壳:SUS304 $\frac{1}{2}$ H T=0.30mm
 4. 卡勾:SUS304 $\frac{3}{4}$ H T=0.15mm
 - 四、电镀:FINISH
 1. 端子:接触点镀金1u"MIN
PIN脚焊接区域镀金G/F
 2. 外壳:电镀80u"MIN
 - 五、电镀品需做粘锡测试:粘锡面积达到95%以上。
 - 六、SMT回流焊 (峰值 $260^{\circ}\text{C} \pm 5^{\circ}\text{C}$) 不能起泡, 膨胀, 变色不良 (变形在公差范围以内)
 - 七、工作温度: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 - 八、盐雾测试:通过48H在浓度为 $5 \pm 1\%$ 盐水的盐雾测试无生锈现象

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:USB TYPE CF 16PIN 侧插SMT CH=7.2
DECIMALS:	ANGLES:		PAR TYPEC-305-ACP16
X.: ± 0.30	X':: $\pm 4^{\circ}$		DWN KING 2018.09.07
X.X: ± 0.20	.X':: $\pm 3^{\circ}$		CHKD APVD
X.XX: ± 0.10		CUSTOMER COPY	SCALE:1:1 UNIT:MM
			SIZE:A4 SHEET:1F1 REV:A

12	13	14	15
MAPX	MODIFICATION	DATE	DRAW
			APPROVE

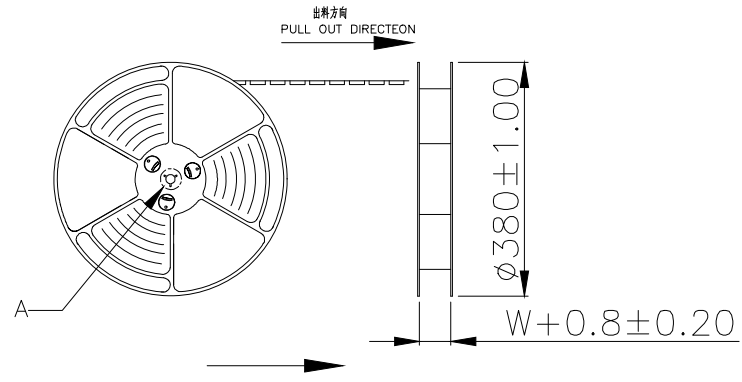



at small positioning hole of the carrier tape side.
标签黏贴处 (朝卷装包材的小定位孔一侧)
Location of label sticking (label)

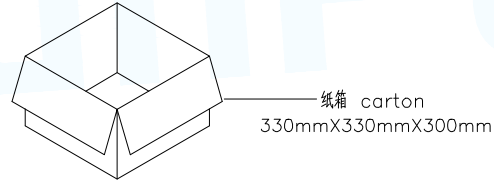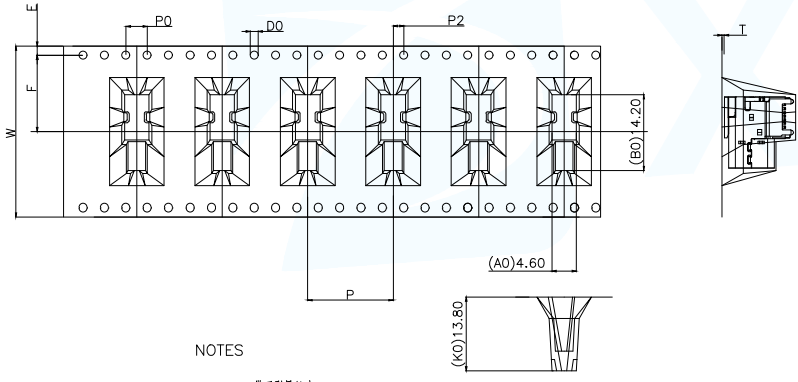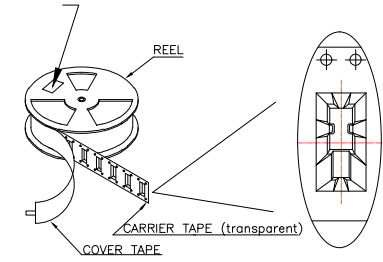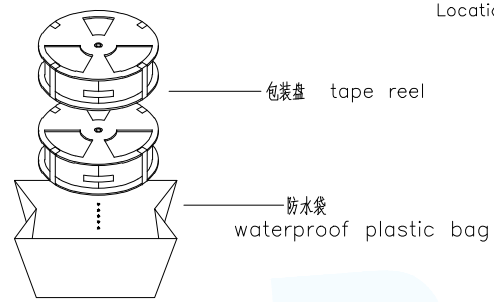

NOTE:
1. 每卷包装数量及每箱装箱数量如左下表格。
Packing q'ty of each reel & carton as below table shown.
2. 将装满产品的卷盘放入纸箱并以胶带封口
Put reels in the carton and use adhesive tape to seal up.

NOTES

1. 带子引导长度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON
2. 上带 剥力为: 0.1~1.3N (10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N (10.2gf~130gf)
出带 运输过程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT
卷带在运输过程中不能脱开
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION



W	32±0.3
F	14.2±0.1
SO	±0.1
T	0.50±0.1
E	1.75±0.1
P	16.0±0.1
PO	4±0.1
P2	2±0.15
AO	4.60±0.1
BO	14.2±0.1
KO	13.8±0.1
DO	1.50±0.1

卷带	规格: $\phi 330$ mm	包装数量: 400PCS
纸箱	规格: 330mmX330mmX300mm	包装数量: 8盘 / 3200PCS

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: USB TYPE CF 16PIN 侧插SMT CH=7.2
DECIMALS:	ANGLES:		PAR TYPEC-305-ACP16
.X: ±0.30	X' : ±4°	DWN KING	2018.09.07
.XX: ±0.20	.X' : ±3°	CHKD	
.XXX: ±0.10		APVD	
CUSTOMER COPY		SCALE 1:1	UNIT: MM
		SIZE: A4	SHEET: 1F1
			REV: A