
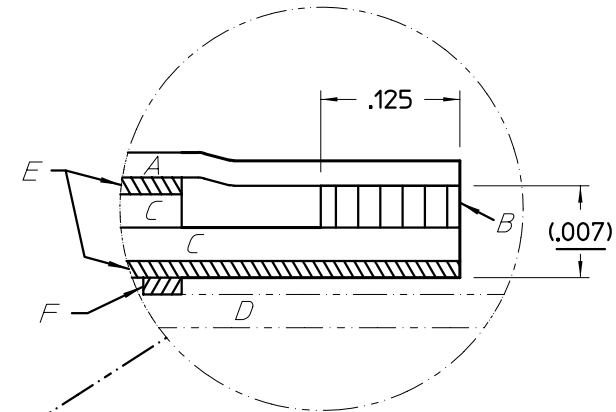


THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HERewith IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
#1	DRN FOR DEVELOPMENT RCM	8/20/98	KGD
#2	ADDED ARTWORK AK	2/1/99	KGD
#3	ADDED NOTE 5 PEI	7/20/99	JMR

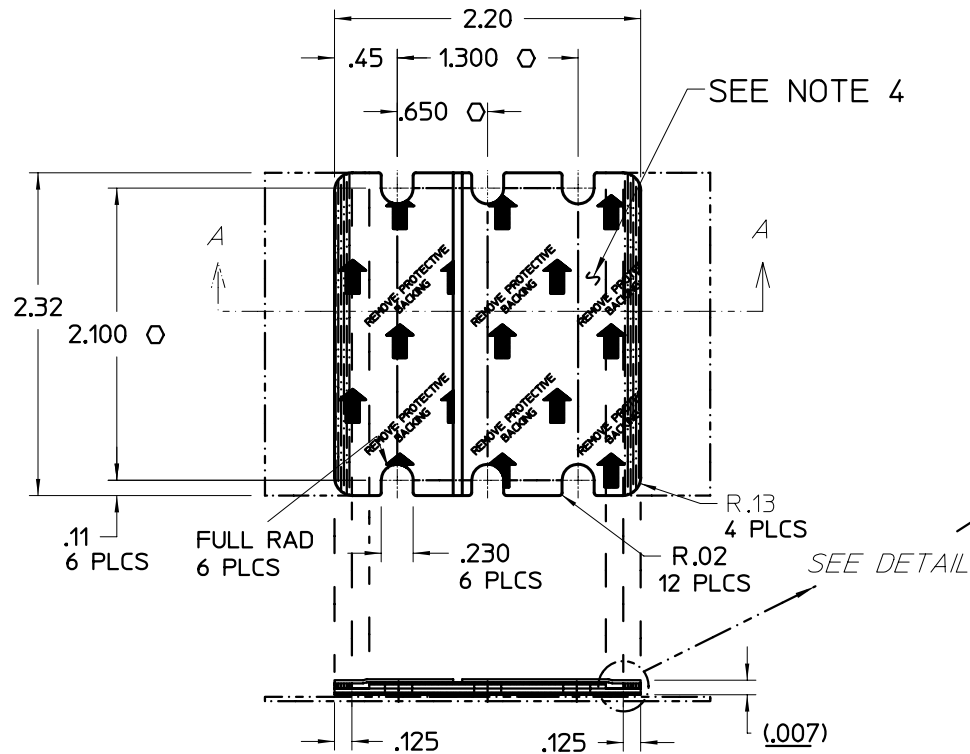

DETAIL :

- A. SPLIT RELEASE LINER.
B. ADHESIVE STRIP, .0025 THICK .125 WIDE.
C. ALUMINUM ALLOY 1145-0, .002 THICK.
D. ROLL CARRIER WITH ADHESIVE STRIP BONDING.
E. PHASE CHANGE THERMAL COMPOUND.
F. ADHESIVE STRIPS ON ROLL CARRIER.

SECTION A-A

(VERTICAL THICKNESS IS NOT SHOWN TO SCALE)

NOTES:

- O 1. MATERIAL: MAKE FROM POWER DEVICES AL-2-22H-232
 O 2. THICKNESS: .007±.001.
 3. SEE DETAIL FOR ASSY ORDER.
 4. FOR ARTWORK SHOWN HERE SEE DWG# 20200.
 5. ODNOTE CRITICAL CHARACTERISTIC FOR LOT INSPECTION.

DRAWN BY RCM		DATE 8/20/98			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES- TOLERANCES ARE: FRACTIONS DECIMALS ANGLES *1/64 .XX=.01 *1° .XXX=.005					
THIRD ANGLE PROJECTION 		SIZE FSCM NO. DWG NO. REV B 67131 19458 #3		THERMAL INTERFACE PAD, ThermMate® (VI-J00)	
DO NOT SCALE DRAWING		SCALE FULL		SHEET 1 OF 1	