

DESCRIPTION

The PT5111 is a semiconductor integrated circuit that incorporates driver circuits suitable for the motors of digital cameras. The current consumption can be hold at quite low level during standby or operation. And the active power supply voltage range for VM is from 2.7~5.5V. So the device is ideal for portable and battery powered applications. The PT5111 is available in QFN40 (5mm × 5mm) package. Performance is specified for -40°C to +85°C temperature range.


APPLICATION

- DSC/DV

FEATURES

- An ultra-fine CMOS process has been adopted for low power consumption in a design.
- A small 40-pin QFN package(5mm×5mm, lead pitch is 0.4 mm)has been adopted.
- 1ch/2ch and 3ch/4ch are capable of micro-steps mode. Possible modes are from 2-2 phase stepper drive to maximum 256 resolution micro-steps.
- Built-in autonomous drive circuit under the control of serial settings.
- Built-in 3-ch PI driver
- Under voltage lockout circuit
- Shut down the internal circuit at VCC=1.8V (Typ.)
- Thermal shut down circuit
- Shut down the internal circuit at 150°C Hysteresis 30°C
- Power supply systems are all internally isolated and include a function to prevent reverse current between power supplies.
- Built-in exclusive control mode from channel 3 to channel 6.(resemblance 7 channel motor drive application)

BLOCK DIAGRAM

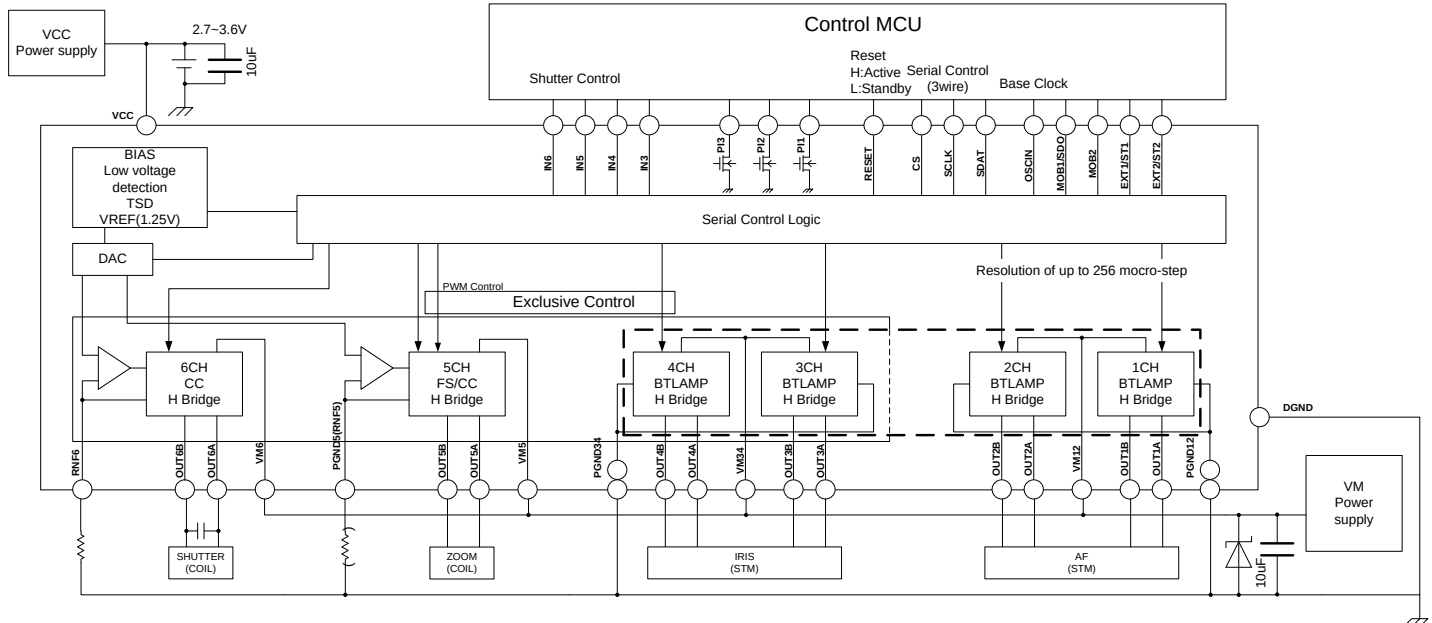


CONTENTS

1.ORDER INFORMATION	3
2.PIN CONFIGURATION	3
3.PIN DESCRIPTION	4
4.INPUT/OUTPUT CONFIGURATION	5
5.FUNCTION DESCRIPTION	6
6.STEP CONTROL	8
7.DC MOTOR, COIL CONTROL EXPLANATION	12
7.1 DRIVING MODES OF CHANNELS 5	12
7.2 CONTROL-PIN SELECTION OF IN3, IN4, IN5, AND IN6 FUNCTIONS	12
8.SERIAL CONTROL MAP	14
8.1 SERIAL CONTROL FUNCTION TABLE	16
8.2 EXAMPLE OF OPERATION IN DECELERATION TO A STOP	39
8.3 TIMING OF MOB OUTPUT	49
8.4 MOTOR PHASE CORRECTION FUNCTION	50
9.IC OPERATION CONTROL	57
9.1 OPERATION CONTROL	57
9.2 OPERATION PROCEDURE	57
9.3 RESTRICTIONS ON REGISTER SETTING DURING MOTOR CONTROL	61
10.ABSOLUTE MAXIMUM RATINGS	65
11.RECOMMENDED OPERATING CONDITIONS	65
12.ELECTRICAL CHARACTERISTICS	66
12.1 SWITCHING CHARACTERISTICS WAVEFORMS	68
12.2 PI RESPONSE CHARACTERISTIC	68
13.LAYOUT GUIDE	69
14.SOLDERING FOOTPRINT	70
15.PACKAGE INFORMATION	71
IMPORTANT NOTICE	72

1. ORDER INFORMATION

Valid Part Number	Package Type	Top Code
PT5111	40 Pins, QFN	PT5111

2. PIN CONFIGURATION

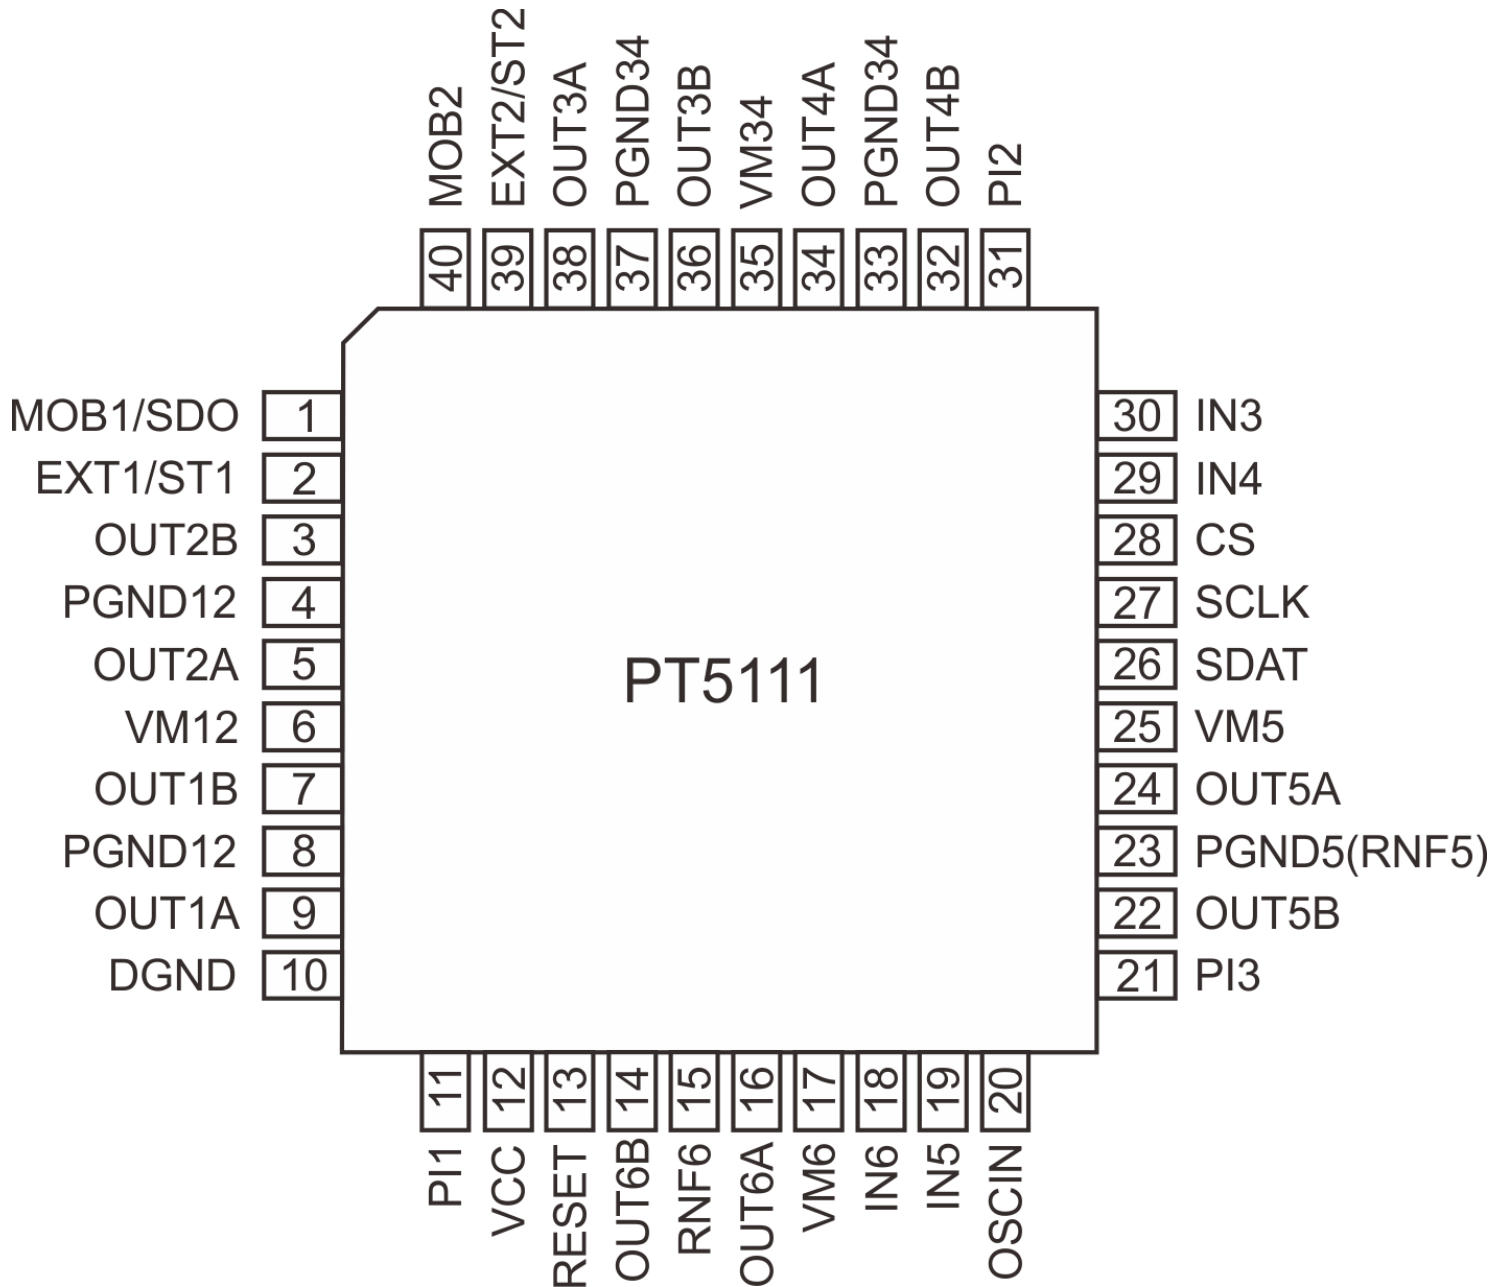

3. PIN DESCRIPTION

Pin Name	I/O	Description	Pin No.
MOB1/SDO	O	MOB (SDO) output	1
EXT1/ST1	O	EXT (ST) output	2
OUT2B	O	CH2 output B	3
PGND12	GND	CH1/2 power GND	4
OUT2A	O	CH2 output A	5
VM12	Power Supply	CH1/2 Power supply	6
OUT1B	O	CH1 output B	7
PGND12	GND	CH1/2 power GND	8
OUT1A	O	CH1 output A	9
DGND	GND	Control GND	10
PI1	O	PI1 output	11
VCC	Power Supply	Small signal power supply	12
RESET	I	Logic reset	13
OUT6B	O	CH6 output B	14
RNF6	GND	CH6 current sense input or power GND	15
OUT6A	O	CH6 output A	16
VM6	Power Supply	CH6 power supply	17
IN6	I	Channel 5 and 6 control	18
IN5	I	Channel 5 and 6 control	19
OSCIN	I	Clock	20
PI3	O	PI3 output	21
OUT5B	O	CH5 output B	22
PGND5(RNF5)	GND	CH5 current sense input or power GND	23
OUT5A	O	CH5 output A	24
VM5	Power Supply	CH5 Power supply	25
SDAT	I	Serial data input	26
SCLK	I	Serial clock input	27
CS	I	Serial data latch control	28
IN4	I	Channel 4, 5 and 7 control	29
IN3	I	Channel 3, 4, 5 and 7 control	30
PI2	O	PI2 output	31
OUT4B	O	CH4 output B	32
PGND34	GND	CH3/4 power GND	33
OUT4A	O	CH4 output A	34
VM34	Power Supply	CH3/4 power supply	35
OUT3B	O	CH3 output B	36
PGND34	GND	CH3/4 power GND	37
OUT3A	O	CH3 output A	38
EXT2/ST2	O	EXT (ST) output	39
MOB2	O	MOB output	40

IMPORTANT NOTICE

Princeton Technology Corporation (PTC) reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and to discontinue any product without notice at any time.

PTC cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a PTC product. No circuit patent licenses are implied.

Princeton Technology Corp.
2F, 233-1, Baociao Road,
Sindian Dist., New Taipei City 23145, Taiwan
Tel: 886-2-66296288
Fax: 886-2-29174598
<http://www.princeton.com.tw>