


| COMPONENTS | IMPEDANCE |
|------------|-----------|
| BNC MALE   | 50 OHM    |
| N MALE     | 50 OHM    |
| RG214/U    | 50 OHM    |
|            |           |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |
|                  |                         |



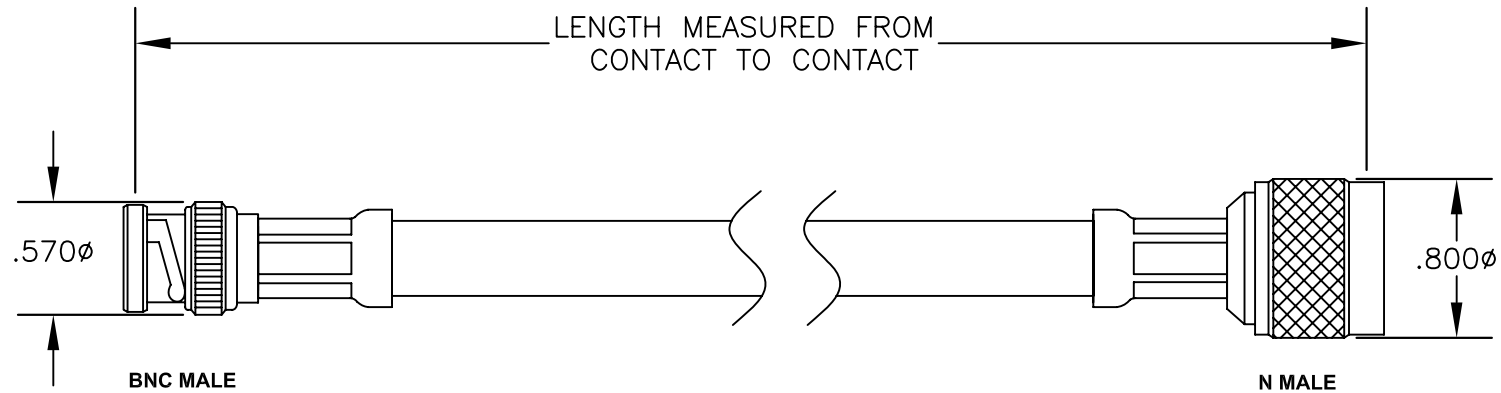

**PASTERNACK ENTERPRISES, INC.**  
P.O BOX 16759, IRVINE, CA 92623  
PHONE (949) 261-1920 FAX (949) 261-7451  
WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)  
**COAXIAL & FIBER OPTICS**

|                                 |                |                                                              |           |
|---------------------------------|----------------|--------------------------------------------------------------|-----------|
| DWG TITLE<br><b>PE3097LF-XX</b> |                | DES. CABLE ASSEMBLY, RG214/U, BNC MALE TO N MALE (LEAD FREE) |           |
| SIZE A                          | FSCM NO. 53919 | CAD FILE 090607                                              | SCALE N/A |

147

**NOTES:**  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES.  
 4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 3/8"$ , WHICHEVER IS GREATER