
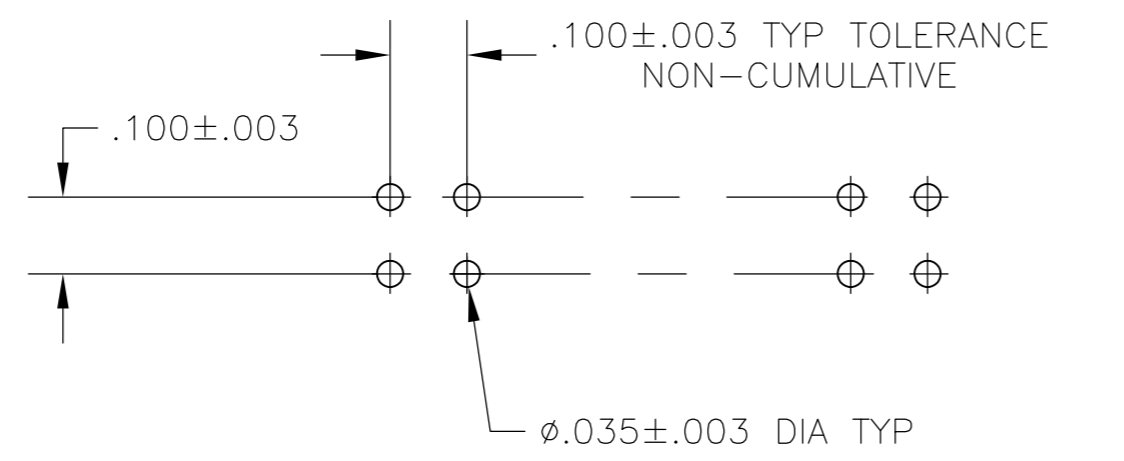


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
AD	00	G2	REVISED PER ECO-11-004587		11MAR11	RK	HMR

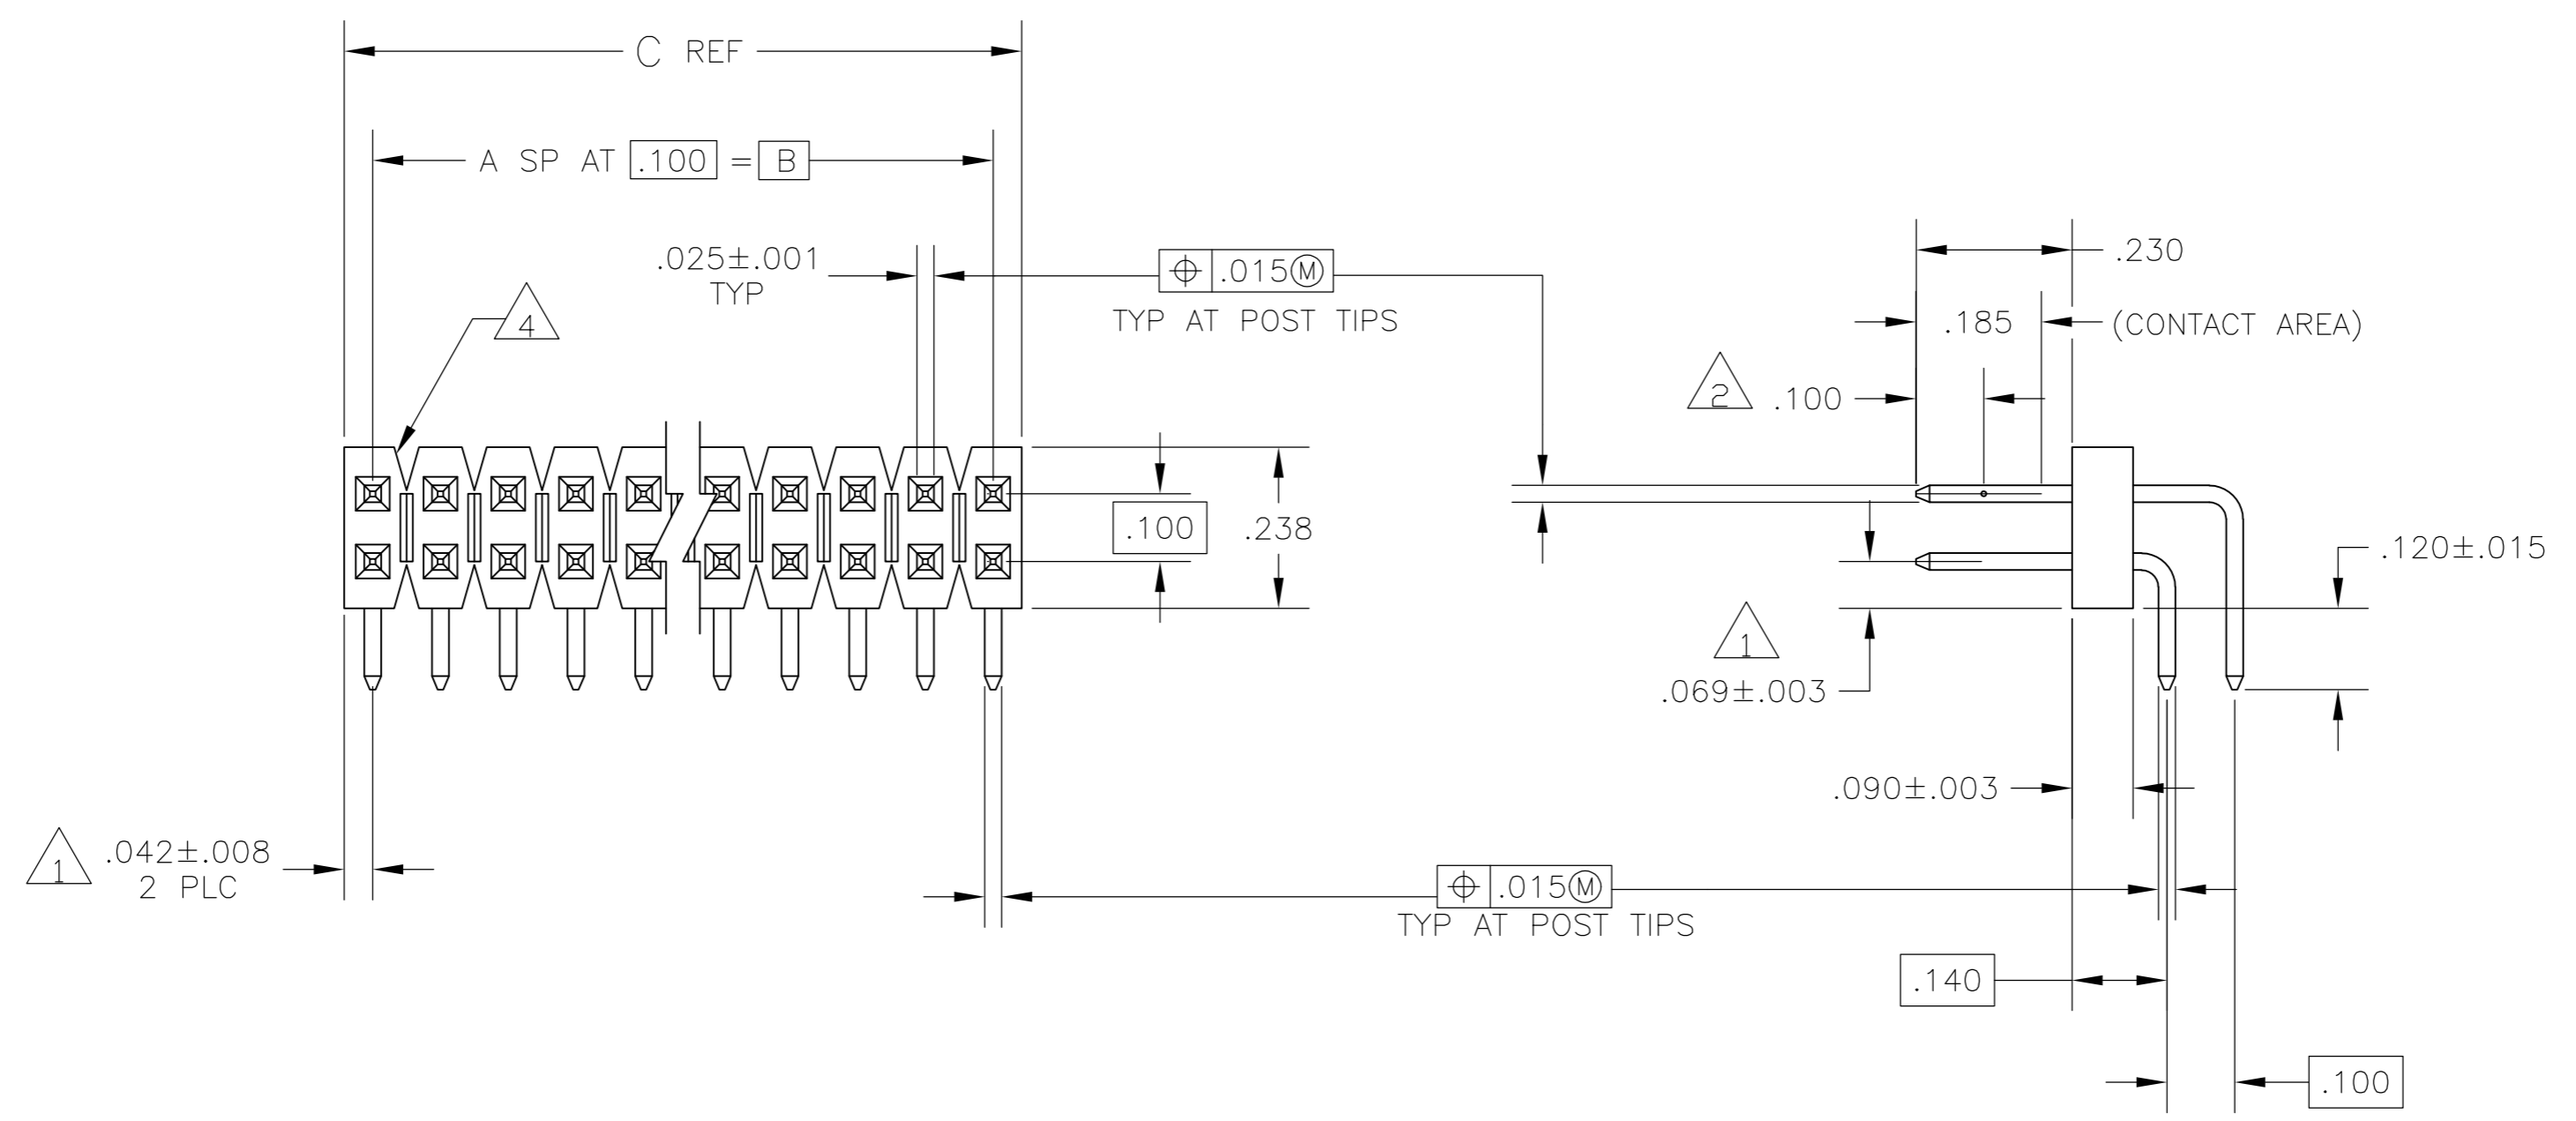

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	H MOLL	23-10-87		TE Connectivity							
DIMENSIONS: INCHES		CHK	T. CLARK	23-10-87		NAME							
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	T. CLARK	29-10-87		PRODUCT SPEC							
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -		APPLICATION SPEC		HEADER ASSY, MOD II, BREAKAWAY, DOUBLE ROW, .100X.100 C/L, RIGHT ANGLE, WITH .025 SQ POSTS									
MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK, POSTS: PHOS BRONZE		FINISH		SEE TABLE		SIZE	A2	CAGE CODE	00779	DRAWING NO	C=103326	RESTRICTED TO	-
		CUSTOMER DRAWING		WEIGHT	-	SCALE	4:1	SHEET	1 OF 2	REV	G2		

103326

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 4 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 5 .000015 GOLD IN THE CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER .000050 NICKEL
- 6 .000015 GOLD IN THE CONTACT AREA, .000100-.000200 MATTE TIN ON THE SOLDER TAIL, ALL OVER .000050 NICKEL
- 7 HIGH TEMPERATURE CONFIGURATION
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REMARKS	PLATING	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER	PLATING	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER	
	7	7			39	80	5	3.984	3.900		39	80	4-103326-0
	7	6	6		38	78	8	3.884	3.800		38	78	8-103326-9
	7	7			37	76	8	3.784	3.700		37	76	8-103326-8
	7	6	6		36	74	8	3.684	3.600		36	74	8-103326-7
	7	7			35	72	8	3.584	3.500		35	72	8-103326-6
	7	6	6		34	70	8	3.484	3.400		34	70	8-103326-5
	7	7			33	68	8	3.384	3.300		33	68	8-103326-4
	7	6	6		32	66	8	3.284	3.200		32	66	8-103326-3
	7	7			31	64	8	3.184	3.100		31	64	8-103326-2
	7	6	6		30	62	8	3.084	3.000		30	62	8-103326-1
	7	7			29	60	8	2.984	2.900		29	60	8-103326-0
	7	6	6		28	58	8	2.884	2.800		28	58	8-103326-9
	7	7			27	56	8	2.784	2.700		27	56	8-103326-8
	7	6	6		26	54	8	2.684	2.600		26	54	8-103326-7
	7	7			25	52	8	2.584	2.500		25	52	8-103326-6
	7	6	6		24	50	8	2.484	2.400		24	50	8-103326-5
	7	7			23	48	8	2.384	2.300		23	48	8-103326-4
	7	6	6		22	46	8	2.284	2.200		22	46	8-103326-3
	7	7			21	44	8	2.184	2.100		21	44	8-103326-2
	7	6	6		20	42	8	2.084	2.000		20	42	8-103326-1
	7	7			19	40	8	1.984	1.900		19	40	2-103326-0
	7	6	6		18	38	8	1.884	1.800		18	38	8-103326-9
	7	7			17	36	8	1.784	1.700		17	36	8-103326-8
	7	6	6		16	34	8	1.684	1.600		16	34	8-103326-7
	7	7			15	32	8	1.584	1.500		15	32	8-103326-6
	7	6	6		14	30	8	1.484	1.400		14	30	8-103326-5
	7	7			13	28	8	1.384	1.300		13	28	8-103326-4
	7	6	6		12	26	8	1.284	1.200		12	26	1-103326-3
	7	7			11	24	8	1.184	1.100		11	24	8-103326-2
	7	6	6		10	22	8	1.084	1.000		10	22	8-103326-1
	7	7			9	20	8	.984	.900		9	20	8-103326-0
	7	6	6		8	18	8	.884	.800		8	18	8-103326-9
	7	7			7	16	8	.784	.700		7	16	103326-8
	7	6	6		6	14	8	.684	.600		6	14	103326-7
	7	7			5	12	8	.584	.500		5	12	103326-6
	7	6	6		4	10	8	.484	.400		4	10	103326-5
	7	7			3	8	8	.384	.300		3	8	8-103326-4
	7	6	6		2	6	8	.284	.200		2	6	8-103326-3
	7	7			1	4	8	.184	.100		1	4	8-103326-2
	7	6	6		2	2	8	.084			2	2	8-103326-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN H MOLL 23-10-87
 CHK T. CLARK 23-10-87
 APVD T. CLARK 29-10-87

TE Connectivity

NAME: HEADER ASSY, MOD II, BREAKAWAY, DOUBLE ROW, .100X.100 C/L, RIGHT ANGLE, WITH .025 SQ POSTS

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 103326 RESTRICTED TO: -

SCALE: 1:1 SHEET: 2 OF 2 REV: G2

CUSTOMER DRAWING