




## PCB Connectors

### GSK 801/12

Terminal Block Vertical, Pin Spacing: 5.0 mm, 12 pole, Insulating Material: PA 6.6, Voltage Rating: 300 V, Current Rating: 24 A

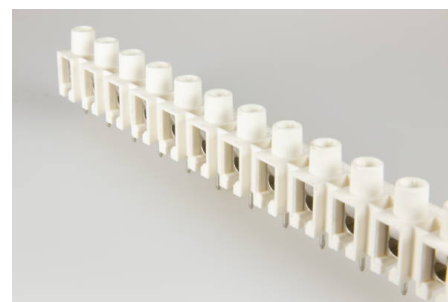

### Order Info

<b>Reference Number (ref. no.)</b>	321612
<b>Applications</b>	Lighting, Electrical Appliances, Transformers, Electronics
<b>PU</b>	100
<b>EAN</b>	4028012109180

### Type

<b>Type</b>	Terminal Block Vertical
<b>Number of poles</b>	12 pole
<b>Clamping Units per Pole</b>	1
<b>Colour</b>	white
<b>Connection Type</b>	Screw

### Technical Data

<b>Voltage Rating</b>	300 V
<b>Current Rating</b>	24 A
<b>Insulating Material</b>	PA 6.6
<b>Contact Material</b>	Brass
<b>Core Cross-Section min.</b>	0.5 mm <sup>2</sup>
<b>Core Cross-Section max.</b>	6.0 mm <sup>2</sup>
<b>Flammability Rating</b>	V-2
<b>max. Ambient Temperature Operation</b>	85 °C
<b>Type of Conductor Solid</b>	yes
<b>Type of Conductor Flexible</b>	yes
<b>Type of Conductor Stranded</b>	yes
<b>Stripping Length</b>	6.7-7.0 mm
<b>Assembly Contact Screw</b>	0.6x3.5 / ⌀ 0.5 Nm
<b>Pin Spacing</b>	5.0 mm
<b>Approbation UL</b>	GSK801_19850129_19941222_UL_E63492_1-03_Description_web.p
<b>Approbation CSA</b>	GSK_GST_Printklemmen_Serie_20160404_CSA_70070893_Certificat