LM5180 70-V_{IN} PSR Flyback DC/DC Converter With 100-V, 1.5-A Integrated Power MOSFET

ADVANCE INFORMATION


1 Features

- Designed for Reliable and Rugged Applications
  - Wide Input Voltage Range of 4.5 V to 70 V
  - Robust Solution With Only One Component Crossing the Isolation Barrier
  - ±1% Total Output Regulation Accuracy
  - Optional V_{OUT} Temperature Compensation
  - 6-ms Internal or Programmable Soft Start
  - Input UVLO and Thermal Shutdown Protection
  - Hiccup-Mode Overcurrent Fault Protection
  - –40°C to 150°C Junction Temperature Range
- Integration Reduces Solution Size and Cost
  - Integrated 100-V, 0.35-Ω Power MOSFET
  - No Opto-coupler or Transformer Auxiliary Winding Required for V_{OUT} Regulation
  - Internal Loop Compensation
  - Low EMI Operation to Meet CISPR 32
- High Efficiency PSR Flyback Operation
  - Quasi-resonant Switching in Boundary Conduction Mode (BCM) at Heavy Load
  - Low Input Quiescent Current
  - External Bias Option for Improved Efficiency
  - Minimum Load Less Than 0.5% of Full Load
- Create a Custom Regulator Design Using WEBENCH® Power Designer

2 Applications

- Isolated Power Rails for PLC Systems
- Motor Drive: IGBT Gate Drive Supplies
- Building Automation HVAC Systems
- Isolated Field Transmitters and Field Actuators

Typical Application

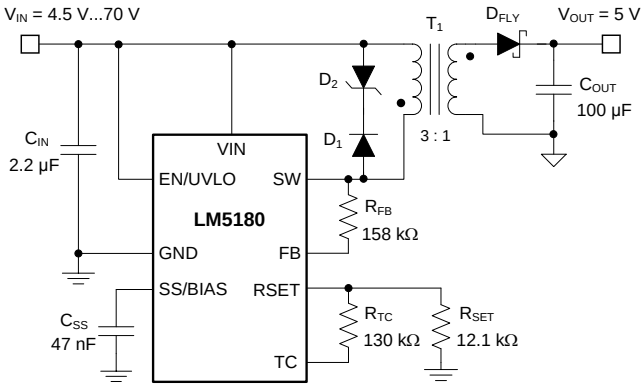

Copyright © 2018, Texas Instruments Incorporated

3 Description

The LM5180 is a primary-side regulated (PSR) flyback converter with high efficiency over a wide input voltage range of 4.5 V to 70 V. The isolated output voltage is sampled from the primary-side flyback voltage, eliminating the need for an optocoupler, voltage reference, or third winding from the transformer for output voltage regulation. The high level of integration results is a simple, reliable and high-density design with only one component crossing the isolation barrier. Boundary conduction mode (BCM) switching enables a compact magnetic solution and better than ±1% load and line regulation performance. An integrated 100-V power MOSFET provides output power up to 7 W with enhanced headroom for line transients.

The LM5180 converter simplifies implementation of isolated DC/DC supplies with optional features to optimize performance for the target end equipment. The output voltage is set by one resistor, while an optional resistor improves output voltage accuracy by negating the thermal coefficient of the flyback diode voltage drop. Additional features include an internally-fixed or externally-programmable soft start, optional bias supply connection for higher efficiency, precision enable input with hysteresis for adjustable line UVLO, hiccup-mode overload protection, and thermal shutdown protection with automatic recovery.


The LM5180 flyback converter is available in a 8-pin, 4-mm × 4-mm, thermally-enhanced WSON package with 0.8-mm pin pitch.

Device Information(1)

PART NUMBER	PACKAGE	BODY SIZE (NOM)
LM5180	WSON (8)	4.00 mm × 4.00 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

Typical Efficiency, V_{OUT} = 5 V

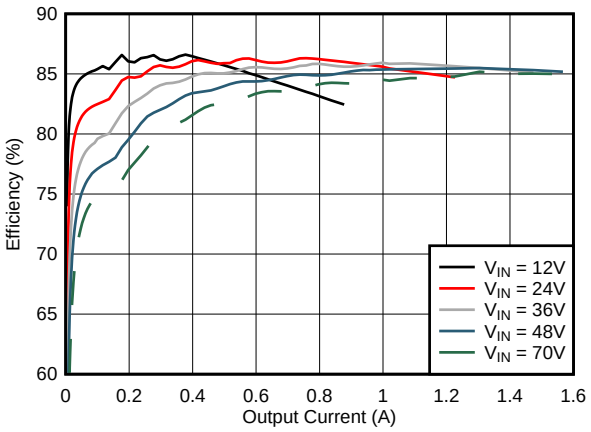

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. ADVANCE INFORMATION for pre-production products; subject to change without notice.

Table of Contents

1 **Features** ... 1
2 **Applications** ... 1
3 **Description** ... 1
4 **Revision History** ... 2
5 **Pin Configuration and Functions** ... 3
6 **Specifications** ... 4
6.1 Absolute Maximum Ratings ... 4
6.2 ESD Ratings ... 4
6.3 Recommended Operating Conditions ... 4
6.4 Thermal Information ... 4
6.5 Electrical Characteristics ... 5
7 **Detailed Description** ... 6
7.1 Overview ... 6
7.2 Functional Block Diagram ... 6
7.3 Feature Description ... 6
7.4 Device Functional Modes ... 11
8 **Application and Implementation** ... 12
8.1 Application Information ... 12
8.2 Typical Applications ... 12
9 **Power Supply Recommendations** ... 28
10 **Layout** ... 29
10.1 Layout Guidelines ... 29
10.2 Layout Examples ... 30
11 **Device and Documentation Support** ... 31
11.1 Device Support ... 31
11.2 Documentation Support ... 31
11.3 Receiving Notification of Documentation Updates 32
11.4 Community Resources ... 32
11.5 Trademarks ... 32
11.6 Electrostatic Discharge Caution ... 32
11.7 Glossary ... 32
12 **Mechanical, Packaging, and Orderable Information** ... 32

ADVANCE INFORMATION


4 Revision History

Changes from Original (July 2018) to Revision A	Page
• Updated *Features* list; added an *Application*	1
• Deleted soft-start capacitor in Figure 5, Figure 18, and Figure 31	12
• Updated transfomer part number in Table 2	13

Copyright © 2018, Texas Instruments Incorporated

5 Pin Configuration and Functions

NGU Package
8-Pin WSON With Wettable Flanks
Top View

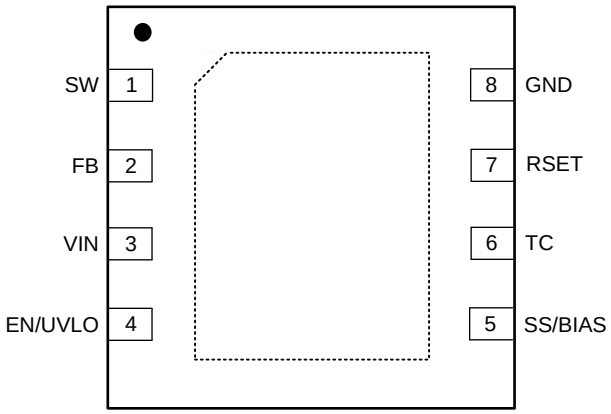

Pin Functions

PIN		I/O(1)	DESCRIPTION
NO.	NAME		
1	SW	P	Switch node that is internally connected to the drain of the N-channel power MOSFET. Connect to the primary-side switching terminal of the flyback transformer.
2	FB	I	Primary side feedback pin. Connect a resistor from FB to SW. The ratio of the FB resistor to the resistor at the RSET pin sets the output voltage.
3	VIN	P/I	Input supply connection. Source for internal bias regulators and input voltage sensing pin. Connect directly to the input supply of the converter with short, low impedance paths.
4	EN/UVLO	I	Enable input and undervoltage lockout (UVLO) programming pin. If the EN/UVLO voltage is below 1.1 V, the converter is in shutdown mode with all functions disabled. If the EN/UVLO voltage is greater than 1.1 V and below 1.5 V, the converter is in standby mode with the internal regulator operational and no switching. If the EN/UVLO voltage is above 1.5 V, the start-up sequence begins.
5	SS/BIAS	I	Soft-start or bias input. Connect a capacitor from SS/BIAS to GND to adjust the output start-up time and input inrush current. If SS/BIAS is left open, the internal 6-ms soft-start timer is activated. Connect an auxiliary winding through a low leakage diode to SS/BIAS to supply bias to the internal voltage regulator and enable internal soft start.
6	TC	I	Temperature compensation pin. Tie a resistor from TC to RSET to compensate for the temperature coefficient of the forward voltage drop of the secondary diode, thus improving regulation at the secondary-side output.
7	RSET	I	Reference resistor tied to GND to set the reference current for FB. Connect a 12.1-kΩ resistor from RSET to GND.
8	GND	G	Analog and power ground. Ground connection of internal control circuits and power MOSFET.

(1) P = Power, G = Ground, I = Input, O = Output.

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated

6 Specifications

6.1 Absolute Maximum Ratings

Over the recommended operating junction temperature range of –40°C to 150°C (unless otherwise noted)(1)

		MIN	MAX	UNIT
Input voltage	VIN to GND	–0.3	75	V
	EN/UVLO to GND	0	75	
	TC to GND	–0.3	6	
	SS to GND	–0.3	14	
	FB to GND	–0.3	75.3	
	FB to VIN	–0.3	0.3	
	RSET to GND	–0.3	3	
Output voltage	SW to GND	–1.5	100	V
	SW to GND (20-ns transient)	–3		
Operating junction temperature, T_J		–40	150	°C
Storage temperature, T_{stg}		–65	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins(1) HBM ESD Classification Level 2	±2000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins(2) CDM ESD Classification Level C4B	±500	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

Over the recommended operating junction temperature range of –40°C to 150°C (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V_{IN}	Input voltage	4.5		70	V
V_{SW}	SW voltage			100	V
$V_{EN/UVLO}$	EN/UVLO voltage			70	V
V_{BIAS}	SS/BIAS voltage			13	V
T_J	Operating junction temperature	–40		150	°C

6.4 Thermal Information

THERMAL METRIC(1)		LM5180 NGU (WSON) 8 PINS	UNIT
$R_{\Theta JA}$	Junction-to-ambient thermal resistance	41.3	°C/W
$R_{\Theta JC(top)}$	Junction-to-case (top) thermal resistance	34.7	°C/W
$R_{\Theta JB}$	Junction-to-board thermal resistance	19.1	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	0.3	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	19.2	°C/W
$R_{\Theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	3.2	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report.

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated

6.5 Electrical Characteristics

Typical values correspond to T_J = 25°C. Minimum and maximum limits aaply over the full –40°C to 150°C junction temperature range unless otherwise indicated. V_{IN} = 24 V and $V_{EN/UVLO}$ = 2 V unless otherwise stated.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
SUPPLY CURRENT						
$I_{SHUTDOWN}$	VIN shutdown current	$V_{EN/UVLO}$ = 0 V		3		µA
I_{ACTIVE}	VIN active current	$V_{EN/UVLO}$ = 2.5 V, V_{RSET} = 1.8 V		290		µA
I_{ACTIVE_BIAS}	VIN current with BIAS connected	$V_{SS/BIAS}$ = 6 V		25		µA
ENABLE AND INPUT UVLO						
$V_{SD-RISING}$	Standby threshold	$V_{EN/UVLO}$ rising		0.65	1.1	V
$V_{SD-FALLING}$	Shutdown threshold	$V_{EN/UVLO}$ falling	0.3			V
$V_{EN-RISING}$	Enable threshold	$V_{EN/UVLO}$ rising	1.47	1.5	1.53	V
$I_{EN-HYST}$	Enable current hysteresis	$V_{EN/UVLO}$ = 1.6 V		5		µA
$V_{EN-HYST}$	Enable voltage hysteresis	$V_{EN/UVLO}$ falling		0.05		V
FEEDBACK						
I_{RSET}	RSET current	R_{RSET} = 12.1 kΩ		100		µA
V_{RSET}	RSET regulation voltage	R_{RSET} = 12.1 kΩ	1.198	1.21	1.222	V
$V_{FB-VIN1}$	FB to VIN voltage	I_{FB} = 80 µA	–40			mV
$V_{FB-VIN2}$	FB to VIN voltage	I_{FB} = 120 µA			40	mV
SWITCHING FREQUENCY						
F_{SW-MIN}	Minimum switching frequency			10		kHz
F_{SW-MAX}	Maximum switching frequency			350		kHz
t_{ON-MIN}	Minimum switch on-time			150		ns
DIODE THERMAL COMPENSATION						
V_{TC}	TC voltage	I_{TC} = ±10 µA, T_J = 25°C		1.2		V
POWER SWITCHES						
$R_{DS(on)}$	MOSFET on-state resistance	I_{SW} = 100 mA		0.35		Ω
SOFT-START AND BIAS						
I_{SS}	SS ext capacitor charging current			5		µA
t_{SS}	Internal SS time			6		ms
$V_{BIAS-UVLO-RISE}$	BIAS enable voltage	$V_{SS/BIAS}$ rising		5.68	5.9	V
$V_{BIAS-UVLO-HYST}$	BIAS UVLO hysteresis	$V_{SS/BIAS}$ falling		180		mV
CURRENT LIMIT						
I_{PEAK}	Peak current limit threshold		1.35	1.5	1.65	A
THERMAL SHUTDOWN						
T_{SD}	Thermal shutdown threshold	T_J rising		180		°C
T_{SD-HYS}	Thermal shutdown hysteresis			20		°C

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated


ADVANCE INFORMATION

7 Detailed Description

7.1 Overview

The LM5180 primary-side regulated (PSR) flyback converter is a high-density, cost-effective solution for industrial systems requiring less than 7 W of isolated DC/DC power. This compact, easy-to-use flyback converter with low I_Q can be applied over a wide input voltage range from 4.5 V to 70 V. Innovative frequency and current amplitude modulation enables high conversion efficiency across the entire load and line range. Primary-side regulation of the isolated output voltage using sampled values of the primary winding voltage eliminates the need for an opto-coupler or an auxiliary transformer winding for feedback. Regulation performance that rivals that of traditional opto-coupler solutions is achieved without the associated cost, solution size and reliability concerns. The LM5180 converter services a wide range of applications including IGBT-based motor drives, factory automation, and medical equipment.

7.2 Functional Block Diagram

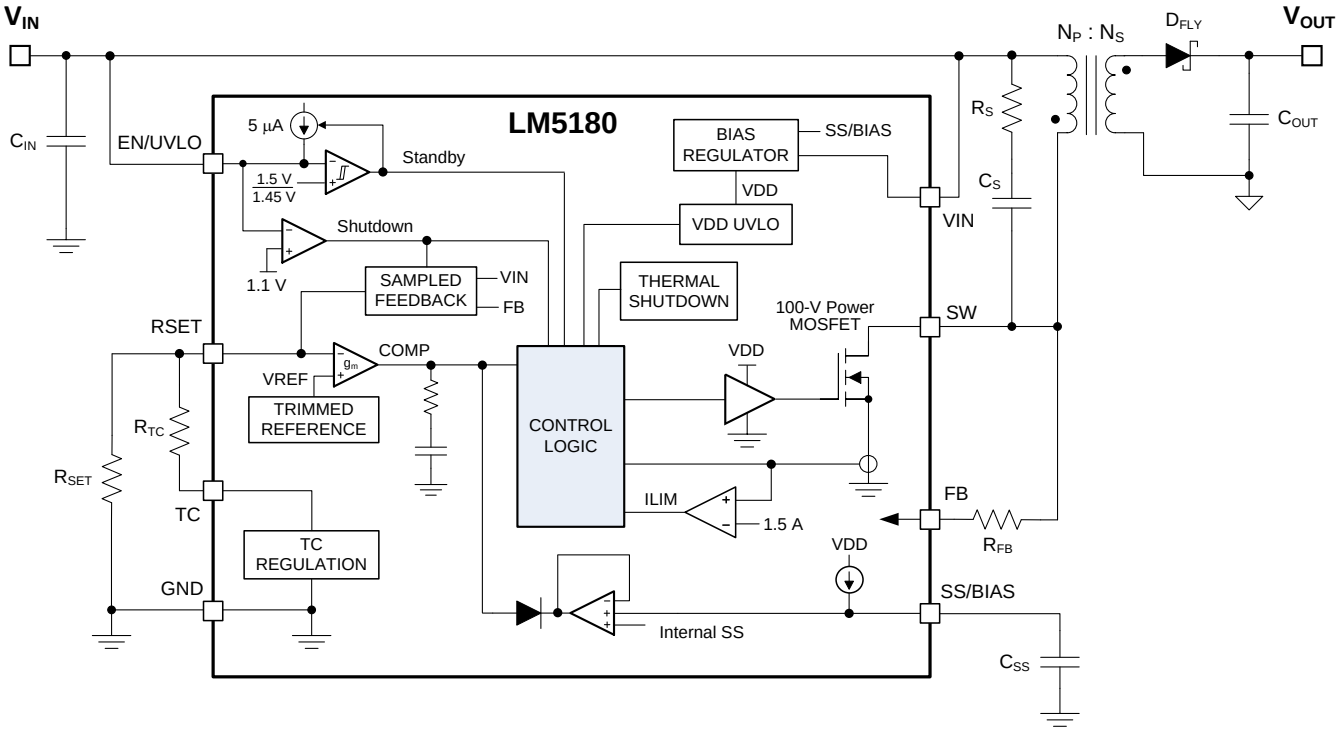

7.3 Feature Description


7.3.1 Integrated Power MOSFET

The LM5180 is a flyback dc/dc converter with integrated 100-V, 1.5-A N-channel power MOSFET. During the MOSFET on-time, the transformer primary current increases from zero with slope V_{IN} / L_{MAG} (where L_{MAG} is the transformer primary-referred magnetizing inductance) while the output capacitor supplies the load current. When the high-side MOSFET is turned off by the control logic, the SW voltage V_{SW} swings up to approximately V_{IN} + (N_{PS} × V_{OUT}), where N_{PS} = N_P/N_S is the primary-to-secondary turns ratio of the transformer. The magnetizing current flows in the secondary side through the flyback diode, charging the output capacitor and supplying current to the load. Duty cycle D is defined as t_{ON} / t_{SW}, where t_{ON} is the MOSFET conduction time and t_{SW} is the switching period.

Figure 1 shows a typical schematic of the LM5180 PSR flyback circuit. Components denoted in red are optional depending on the application requirements.

Copyright © 2018, Texas Instruments Incorporated

Feature Description (continued)

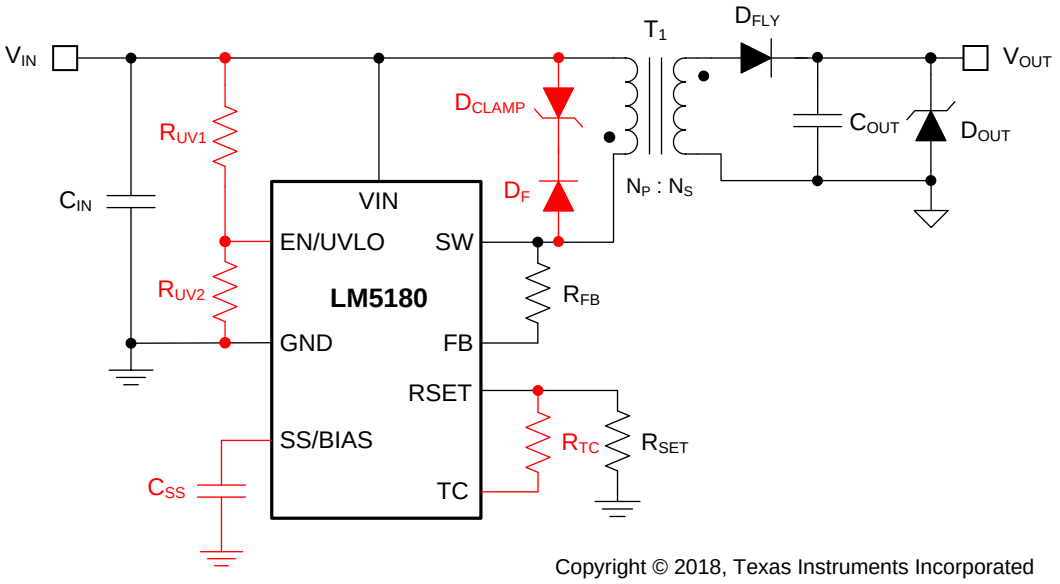

Copyright © 2018, Texas Instruments Incorporated

Figure 1. LM5180 Flyback Converter Schematic (Optional Components in Red)

7.3.2 PSR Flyback Modes of Operation

The LM5180 uses a variable-frequency, peak current-mode (VFPCM) control architecture with three possible modes of operation as illustrated in Figure 2.

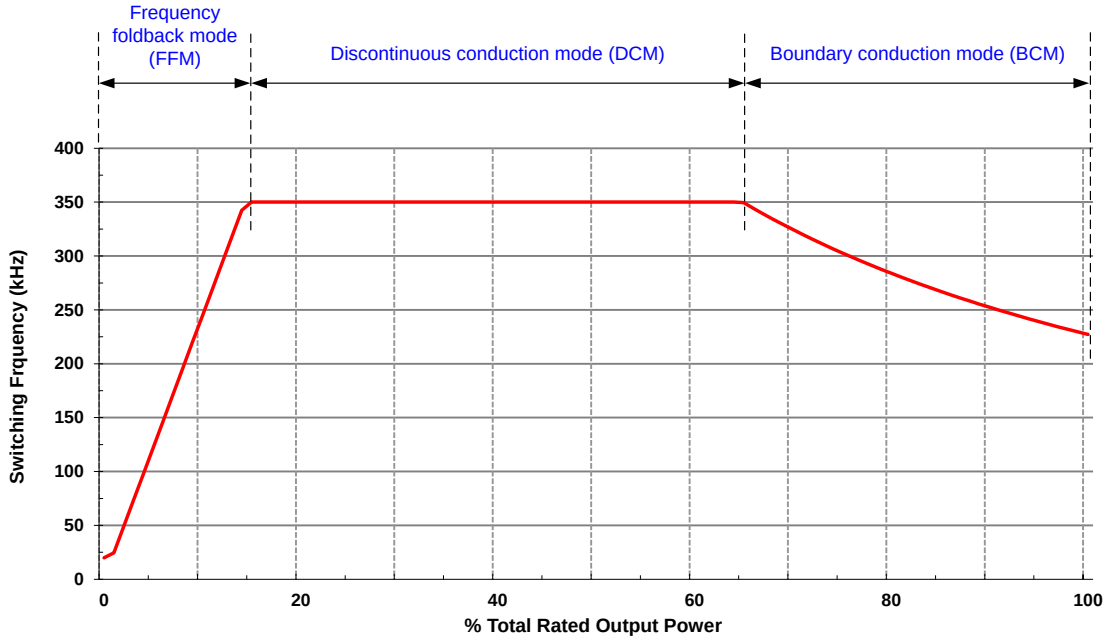


Figure 2. Three Modes of Operation Illustrated by Variation of Switching Frequency With Load

ADVANCE INFORMATION

Feature Description (continued)

The LM5180 operates in boundary conduction mode (BCM) at heavy loads. The power MOSFET turns on when the current in the secondary winding reaches zero, and the MOSFET turns off when the peak primary current reaches the level dictated by the output of the internal error amplifier. As the load is decreased, the frequency increases in order to maintain BCM operation. The duty cycle of the flyback converter is given Equation 1, where V_D is the forward voltage drop of the flyback diode as its current approaches zero.

$$D_{BCM} = \frac{(V_{OUT} + V_D) \cdot N_{PS}}{V_{IN} + (V_{OUT} + V_D) \cdot N_{PS}} \quad (1)$$

The output power in BCM is given by Equation 2, where the applicable switching frequency and peak primary current in BCM are specified by Equation 3 and Equation 4, respectively.

$$P_{OUT(BCM)} = \frac{L_{MAG} \cdot I_{PRI\text{-}PK(BCM)}^2}{2} \cdot F_{SW(BCM)} \quad (2)$$

$$F_{SW(BCM)} = \frac{1}{I_{PRI\text{-}PK(BCM)} \cdot \left(\frac{L_{MAG}}{V_{IN}} + \frac{L_{MAG}}{N_{PS} \cdot (V_{OUT} + V_D)} \right)} \quad (3)$$

$$I_{PRI\text{-}PK(BCM)} = \frac{2 \cdot (V_{OUT} + V_D) \cdot I_{OUT}}{V_{IN} \cdot D} \quad (4)$$

As the load decreases, the LM5180 clamps the maximum switching frequency to 350 kHz, and the converter enters discontinuous conduction mode (DCM). The power delivered to the output in DCM is proportional to the peak primary current squared as given by Equation 5 and Equation 6. Thus, as the load decreases, the peak current reduces to maintain regulation at 350-kHz switching frequency.

$$P_{OUT(DCM)} = \frac{L_{MAG} \cdot I_{PRI\text{-}PK(DCM)}^2}{2} \cdot F_{SW(DCM)} \quad (5)$$

$$I_{PRI\text{-}PK(DCM)} = \sqrt{\frac{2 \cdot I_{OUT} \cdot (V_{OUT} + V_D)}{L_{MAG} \cdot F_{SW(DCM)}}} \quad (6)$$

$$D_{DCM} = \frac{L_{MAG} \cdot I_{PRI\text{-}PK(DCM)} \cdot F_{SW(DCM)}}{V_{IN}} \quad (7)$$

At even lighter loads, the primary-side peak current set by the internal error amplifier decreases to a minimum level of 0.3 A, or 20% of its 1.5-A peak value, and the MOSFET off-time extends to maintain the output load requirement. The system operates in frequency foldback mode (FFM), and the switching frequency decreases as the load current is reduced. Other than a fault condition, the lowest frequency of operation of the LM5180 is 12 kHz, which sets a minimum load requirement of approximately 0.5% full load.

7.3.3 Setting the Output Voltage

To minimize output voltage regulation error, the LM5180 senses the reflected secondary voltage when the secondary current reaches zero. The feedback (FB) resistor, which is connected between SW and FB as shown in Figure 1, is determined using Equation 8, where R_{SET} is nominally 12.1 kΩ.

$$R_{FB} = (V_{OUT} + V_D) \cdot N_{PS} \cdot \frac{R_{SET}}{V_{REF}} \quad (8)$$

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated

Feature Description (continued)

7.3.3.1 Diode Thermal Compensation

The LM5180 employs a unique thermal compensation circuit that adjusts the feedback setpoint based on the thermal coefficient of the flyback diode's forward voltage drop. Even though the output voltage is measured when the secondary current is effectively zero, there is still a non-zero forward voltage drop associated with the flyback diode. Select the thermal compensation resistor using Equation 9.

$$R_{TC} = \frac{R_{FB}}{N_{PS}} \cdot \frac{3\,mV/°C}{TC_{Diode}} \quad (9)$$

The temperature coefficient of the diode voltage drop may not be explicitly provided in the diode datasheet, so the effective value can be estimated based on the measured output voltage shift over temperature when the TC resistor is not installed.

7.3.4 Control Loop Error Amplifier

The inputs of the error amplifier include a level-shifted version of the FB voltage and an internal 1.21-V reference set by the resistor at RSET. A type-2 internal compensation network stabilizes the converter. In BCM operation when the output voltage is in regulation, an on-time interval is initiated when the secondary current reaches zero. The power MOSFET is subsequently turned off when an amplified version of the peak primary current exceeds the error amplifier output.

7.3.5 Precision Enable

The precision EN/UVLO input supports adjustable input undervoltage lockout (UVLO) with hysteresis for application specific power-up and power-down requirements. EN/UVLO connects to a comparator with a 1.5-V reference voltage and 50-mV hysteresis. An external logic signal can be used to drive the EN/UVLO input to toggle the output on and off for system sequencing or protection. The simplest way to enable the LM5180 is to connect EN/UVLO directly to V_{IN}. This allows the LM5180 to start up when V_{IN} is within its valid operating range. However, many applications benefit from using a resistor divider R_{UV1} and R_{UV2} as shown in Figure 3 to establish a precision UVLO level.

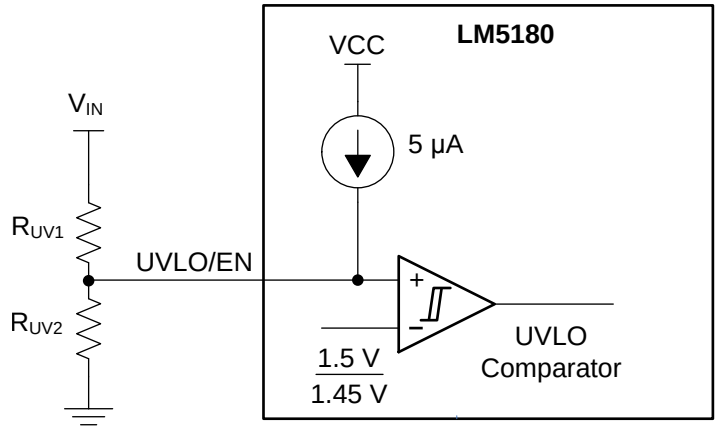


Figure 3. Programmable Input Voltage UVLO With Hysteresis

Use Equation 10 and Equation 11 to calculate the input UVLO voltages turn-on and turn-off voltages, respectively, where V_{UVLO1} and V_{UVLO2} are the UVLO comparator thresholds and I_{UVLO} is the hysteresis current.

$$V_{IN(on)} = V_{UVLO1}\left(1 + \frac{R_{UV1}}{R_{UV2}}\right) \quad (10)$$

$$V_{IN(off)} = V_{UVLO2}\left(1 + \frac{R_{UV1}}{R_{UV2}}\right) - I_{UVLO} \cdot R_{UV2} \quad (11)$$

ADVANCE INFORMATION

ADVANCE INFORMATION

Feature Description (continued)

The LM5180 also provides a low-I_Q shutdown mode when the EN/UVLO voltage is pulled below a base-emitter voltage drop (approximately 0.6 V at room temperature). If the EN/UVLO voltage is below this hard shutdown threshold, the internal LDO regulator powers off, and the internal bias-supply rail collapses, shutting down the bias currents of the LM5180. The LM5180 operates in standby mode when the EN/UVLO voltage is between the hard shutdown and precision-enable thresholds.

7.3.6 Configurable Soft Start

The LM5180 has a flexible and easy-to-use soft-start control pin, SS/BIAS. The soft-start feature prevents inrush current impacting the LM5180 and the input supply when power is first applied. This is achieved by controlling the voltage at the output of the internal error amplifier. Soft start is achieved by slowly ramping up the target regulation voltage when the device is first enabled or powered up. Selectable and adjustable start-up timing options include a 6-ms internally-fixed soft start and an externally-programmable soft start.

The simplest way to use the LM5180 is to leave SS/BIAS open. The LM5180 employs an internal soft-start control ramp and starts up to the regulated output voltage in 6 ms.


However, in applications with a large amount of output capacitance, higher V_{OUT} or other special requirements, the soft-start time can be extended by connecting an external capacitor C_{SS} from SS/BIAS to GND. A longer soft-start time further reduces the supply current needed to charge the output capacitors while sourcing the required load current. When the EN/UVLO voltage exceeds the UVLO rising threshold and a delay of 20 µs expires, an internal current source I_{SS} of 5 µA charges C_{SS} and generates a ramp to control the primary current amplitude. Calculate the soft-start capacitance for a desired soft-start time, T_{SS}, using Equation 12.

$$C_{SS}(nF) = 5 \cdot T_{SS}(ms) \tag{12}$$

C_{SS} is discharged by an internal FET when switching is disabled by EN/UVLO or thermal shutdown.

7.3.7 External Bias Supply

The LM5180 has an external bias supply feature that reduces input quiescent current and increases efficiency. When the voltage at SS/BIAS exceeds a rising threshold of 5.9 V, bias power for the internal LDO regulator can be derived from an external voltage source or from a transformer auxiliary winding as shown in Figure 4. With a bias supply connected, the LM5180 then uses its internal soft-start ramp to control the primary current during start-up.

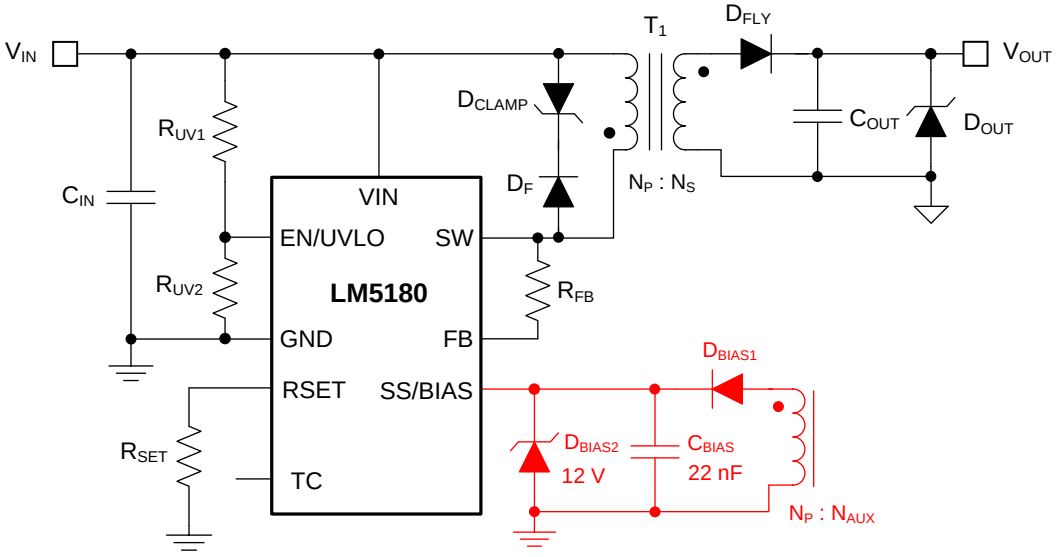

Copyright © 2018, Texas Instruments Incorporated

Figure 4. External Bias Supply Using Transformer Auxiliary Winding

Copyright © 2018, Texas Instruments Incorporated

Feature Description (continued)

When using a transformer auxiliary winding for bias power, the total leakage current related to D_{BIAS1} and D_{BIAS2} should be less than 1 µA across the full operating temperature range.

7.3.8 Minimum On-Time and Off-Time

When the internal power MOSFET is turned off, the leakage inductance of the transformer resonates with the SW node parasitic capacitance. The resultant ringing behavior can be excessive with large transformer leakage inductance and may corrupt the secondary zero-current detection. In order to prevent such a situation, a minimum switch off-time, designated as $t_{OFF-MIN}$, of maximum 500 ns is set internally to ensure proper functionality. This sets a lower limit for the transformer magnetizing inductance as discussed in Detailed Design Procedure.

Furthermore, noise effects as a result of power MOSFET turn-on can impact the internal current sense circuit measurement. To mitigate this effect, the LM5180 provides a blanking time after the MOSFET turns on. This blanking time forces a minimum on-time, t_{ON-MIN}, of 150 ns.

7.3.9 Overcurrent Protection

In case of an overcurrent condition on the isolated output(s), the output voltage drops lower than the regulation level since the maximum power delivered is limited by the peak current capability on the primary side. The peak primary current is maintained at 1.5 A until the output decreases to the secondary diode voltage drop to impact the reflected signal on the primary side. At this point, the LM5180 assumes the output cannot be recovered and re-calibrates its switching frequency to 9 kHz until the overload condition is removed. The LM5180 responds with similar behavior to an output short circuit condition.

7.3.10 Thermal Shutdown

Thermal shutdown is an integrated self-protection to limit junction temperature and prevent damage related to overheating. Thermal shutdown turns off the device when the junction temperature exceeds 180°C to prevent further power dissipation and temperature rise. Junction temperature decreases after shutdown, and the LM5180 restarts when the junction temperature falls to 160°C.

7.4 Device Functional Modes

7.4.1 Shutdown Mode

EN/UVLO facilitates ON and OFF control for the LM5180. When $V_{EN/UVLO}$ is below approximately 0.6 V, the device is in shutdown mode. Both the internal LDO and the switching regulator are off. The quiescent current in shutdown mode drops to 3 µA at V_{IN} = 24 V. The LM5180 also employs internal bias rail undervoltage protection. If the internal bias supply voltage is below its UV threshold, the converter remains off.

7.4.2 Standby Mode

The internal bias rail LDO regulator has a lower enable threshold than the converter itself. When $V_{EN/UVLO}$ is above 0.6 V and below the precision-enable threshold (1.5 V typically), the internal LDO is on and regulating. The precision enable circuitry is turned on once the internal VCC is above its UV threshold. The switching action and voltage regulation are not enabled until $V_{EN/UVLO}$ rises above the precision enable threshold.

7.4.3 Active Mode

The LM5180 is in active mode when $V_{EN/UVLO}$ is above the precision-enable threshold and the internal bias rail is above its UV threshold. The LM5180 operates in one of three modes depending on the load current requirement:

1. Boundary conduction mode (BCM) at heavy loads.
2. Discontinuous conduction mode (DCM) at medium loads.
3. Frequency foldback mode (FFM) at light loads.

Refer to *PSR Flyback Modes of Operation* for more detail.

ADVANCE INFORMATION

8 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

The LM5180 requires only a few external components to convert from a wide range of supply voltages to one or more isolated output rails. To expedite and streamline the process of designing of a LM5180-based converter, a comprehensive LM5180 quick-start calculator is available for download to assist the designer with component selection for a given application. WEBENCH® online software is also available to generate complete designs, leveraging iterative design procedures and access to comprehensive component databases. The following sections discuss the design procedure for both single- and dual-output implementations using specific circuit design examples.


As mentioned previously, the LM5180 also integrates several optional features to meet system design requirements, including precision enable, input UVLO, programmable soft start, output voltage thermal compensation, and external bias supply connection. Each application incorporates these features as needed for a more comprehensive design. The application circuits detailed in *Typical Applications* show LM5180 configuration options suitable for several application use cases. Refer to the *LM5180EVM-S05* EVM user's guide for more detail.

8.2 Typical Applications

For step-by-step design procedures, circuit schematics, bill of materials, PCB files, simulation and test results, refer to the *TI Designs* reference design library.

8.2.1 Design 1: Wide V_{IN}, Low I_Q PSR Flyback Converter Rated at 5 V, 1 A

The schematic diagram of a 5-V, 1-A PSR flyback converter is given in Figure 5.

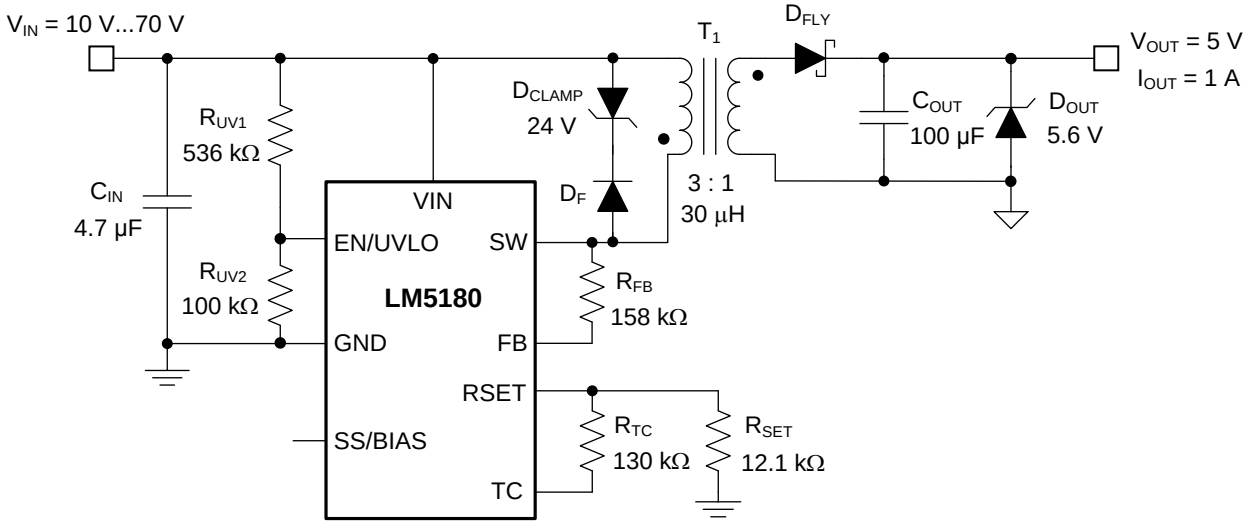

Copyright © 2018, Texas Instruments Incorporated

Figure 5. Schematic for Design 1 With $V_{IN(nom)}$ = 24 V, V_{OUT} = 5 V, I_{OUT} = 1 A

Copyright © 2018, Texas Instruments Incorporated

ADVANCE INFORMATION

8.2.1.1 Design Requirements

The required input, output, and performance parameters for this application example are shown in Table 1.

Table 1. Design Parameters

DESIGN PARAMETER	VALUE
Input voltage range	10 V to 70 V
Input UVLO thresholds	9.5 V on, 6.5 V off
Output voltage	5 V
Rated load current, V_{IN} = 24 V	1 A
Output voltage regulation	±1%
Output voltage ripple	< 100 mV

The target full-load efficiency is 86% based on a nominal input voltage of 24 V and an isolated output voltage of 5 V. The LM5180 is chosen to deliver a fixed 5-V output voltage set by resistor R_{FB} connected from SW to FB pins. The input voltage turnon and turnoff thresholds are established by R_{UV1} and R_{UV2}. The required components are listed in Table 2.

Table 2. List of Components for Design 1

REF DES	QTY	SPECIFICATION	VENDOR	PART NUMBER
C_{IN}	1	4.7 µF, 100 V, X7R, 1206, ceramic	Murata	GRM31CZ72A475KE11
		4.7 µF, 100 V, X7S, 1210, ceramic	TDK	C3225X7S2A475M
			Murata	GRM32DC72A475KE01L
			Taiyo Yuden	HMK325C7475MN-TE
C_{OUT}	1	100 µF, 6.3 V, X7S, 1210, ceramic	Murata	GRM32EC70J107ME15
			Taiyo Yuden	JMK325AC7107MM-P
		100 µF, 6.3 V, X6S, 1210, ceramic	TDK	C3225X6S0J107M250AC
			Murata	GRM32EC80J107ME20L
		100 µF, 6.3 V, X5R, 1210, ceramic	TDK	C3225X5R0J107M250AC
			Murata	GRM32ER60J107ME20
			Würth Electronik	885012109004
D_{CLAMP}	1	Zener, 24 V, 1 W, PowerDI-123, AEC-Q101	DFLZ24-7	Diodes Inc.
D_F	1	Switching diode, 75 V, 0.25 A, SOD-323	CMDD4448	Central Semi
D_{FLY}	1	Schottky diode, 40 V, 2 A, SOD-123	FSV340FP	ONsemi
D_{OUT}	1	Zener, 5.6 V, 5%, SOD-523	BZX585-C5V6	Nexperia
R_{FB}	1	158 kΩ, 1%, 0402	Std	Std
R_{SET}	1	12.1 kΩ, 1%, 0402	Std	Std
R_{TC}	1	130 kΩ, 1%, 0402	Std	Std
R_{UV1}	1	536 kΩ, 1%, 0603	Std	Std
R_{UV2}	1	100 kΩ, 1%, 0402	Std	Std
T_1	1	30 µH, 2 A, turns ratio 3 : 1, SMT, 9 × 10 mm	Würth Electronik	750317605
			Coilcraft	YA8779-BL
		40 µH, 2 A, turns ratio 3 : 1, SMT, 13 × 15 mm	Würth Electronik	750313974
U_1	1	LM5180 PSR flyback converter, VSON-8	Texas Instruments	LM5180NGUR

8.2.1.2 Detailed Design Procedure

8.2.1.2.1 Custom Design With WEBENCH® Tools

Click here to create a custom design using the LM5180 device with WEBENCH® Power Designer.

1. Start by entering the input voltage (V_{IN}), output voltage (V_{OUT}), and output current (I_{OUT}) requirements.
2. Optimize the design for key parameters such as efficiency, footprint, and cost using the optimizer dial.
3. Compare the generated design with other possible solutions from Texas Instruments.

ADVANCE INFORMATION

The WEBENCH Power Designer provides a customized schematic along with a list of materials with real-time pricing and component availability.

In most cases, these actions are available:

- Run electrical simulations to see important waveforms and circuit performance
- Run thermal simulations to understand board thermal performance
- Export customized schematic and layout into popular CAD formats
- Print PDF reports for the design, and share the design with colleagues

Get more information about WEBENCH tools at www.ti.com/WEBENCH.

8.2.1.2.2 Custom Design With Excel Quickstart Tool

Select components based on the converter specifications using the LM5180 quick-start calculator available for download from the LM5180 product folder.

8.2.1.2.3 Flyback Transformer – T_1

Choose a turns ratio based on an approximate 60% max duty cycle at minimum input voltage using Equation 13, rounding up or down as needed.

$$N_{PS} = \frac{D_{MAX}}{1 - D_{MAX}} \cdot \frac{V_{IN(min)}}{V_{OUT} + V_D} = \frac{0.6}{1 - 0.6} \cdot \frac{10\,V}{5\,V + 0.3\,V} = 3 \tag{13}$$

Select a magnetizing inductance based on the minimum off-time constraint using Equation 14. Choose a value of 30 µH with a saturation current of 2 A for this application.

$$L_{MAG} \geq \frac{(V_{OUT} + V_D) \cdot N_{PS} \cdot t_{OFF\text{-}MIN}}{I_{PRI\text{-}PK(FFM)}} = \frac{(5\,V + 0.3\,V) \cdot 3 \cdot 500\,ns}{0.3\,A} = 26.5\,\mu H \tag{14}$$

Note that a higher magnetizing inductance provides a larger operating range for BCM and FFM, but the leakage inductance may increase based on the increase number of primary turns, N_P. The primary and secondary winding RMS currents are given by Equation 15 and Equation 16, respectively.

$$I_{PRI\text{-}RMS} = \sqrt{\frac{D}{3}} \cdot I_{PRI\text{-}PK} \tag{15}$$

$$I_{SEC\text{-}RMS} = \sqrt{\frac{2 \cdot I_{OUT} \cdot I_{PRI\text{-}PK} \cdot N_{PS}}{3}} \tag{16}$$

Find the maximum output power for a given turns ratio using Equation 17, where the typical value for $I_{PRI\text{-}PK(max)}$ from Electrical Characteristics is 1.5 A. Iterate by increasing the turns ratio if the output power is too low at minimum input voltage.

$$P_{OUT(max)} = \frac{L_{MAG} \cdot I_{PRI\text{-}PK}^2}{2} \cdot F_{SW(BCM)} = \frac{I_{PRI\text{-}PK}}{2 \cdot \left[\frac{1}{V_{IN}} + \frac{1}{N_{PS} \cdot V_{OUT}} \right]} \tag{17}$$

8.2.1.2.4 Flyback Diode – D_{FLY}

The flyback diode reverse voltage is given by Equation 18.

$$V_{D\text{-}REV} \geq \frac{V_{IN(max)}}{N_{PS}} + V_{OUT} = \frac{70\,V}{3} + 5\,V \approx 28\,V \tag{18}$$

Choose a 40-V, 3-A Schottky diode for this application to account for diode voltage overshoot and ringing related to transformer leakage inductance and diode parasitic capacitance. Connect an appropriate RC snubber circuit (for example, 100 Ω and 22 pF) across the diode if needed.

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated

8.2.1.2.5 Clamp Circuit – D_F, D_{CLAMP}

Connect a diode-Zener clamp circuit across the primary winding to limit the peak SW node voltage after MOSFET turn-off below the maximum level of 100 V, as given by Equation 19.

$$V_{DZ(clamp)} < V_{SW(max)} - V_{IN(max)} \tag{19}$$

Choosing the zener, D_{CLAMP}, with clamp voltage of approximately 1.5 times the reflected output voltage, as specified by Equation 20, provides a balance between the maximum SW voltage excursion and the leakage inductance demagnetization time.

$$V_{DZ(clamp)} = 1.5 \cdot N_{PS} \cdot \left(V_{OUT} + V_D\right) = 1.5 \cdot 3 \cdot \left(5\,V + 0.3\,V\right) \approx 24\,V \tag{20}$$

Select an ultra-fast switching diode or Schottky diode for D_F with rated voltage greater than the maximum input voltage and with low forward recovery voltage drop.

8.2.1.2.6 Output Capacitor – C_{OUT}

The output capacitor determines the voltage ripple at the converter output, limits the voltage excursion during a load transient, and sets the dominant pole of the converter's small-signal response. For a flyback converter specifically, the output capacitor supplies the load current when the main switch is on, and therefore the output voltage ripple is a function of load current and duty cycle.

Select an output capacitance using Equation 21 to limit the ripple voltage amplitude to less than 1% of the output voltage at minimum input voltage.

$$C_{OUT} \geq \frac{I_{OUT} \cdot \left(I_{PRI\text{-}PK} - \frac{I_{OUT}}{N_{PS}}\right)^2}{I_{PRI\text{-}PK}^{\,2} \cdot F_{SW} \cdot \Delta V_{OUT}} \tag{21}$$

Substituting the full load current, switching frequency, peak primary current and peak-to-peak voltage ripple specification gives C_{OUT} greater than 30 µF. Mindful of the voltage coefficient of ceramic capacitors, select a 100-µF, 6.3-V capacitor in 1210 case size with X5R or better dielectric. The output capacitor RMS ripple current is given by Equation 22.

$$I_{COUT\text{-}RMS} = I_{OUT} \cdot \sqrt{\frac{2 \cdot N_{PS} \cdot I_{PRI\text{-}PK}}{3 \cdot I_{OUT}} - 1} \tag{22}$$

8.2.1.2.7 Input Capacitor – C_{IN}

Select an input capacitance using Equation 23 to limit the ripple voltage amplitude to less than 5% of the input voltage when operating at nominal input voltage.

$$C_{IN} \geq \frac{I_{PRI\text{-}PK} \cdot D \cdot \left(1 - \frac{D}{2}\right)^2}{2 \cdot F_{SW} \cdot \Delta V_{IN}} \tag{23}$$

Substituting the input current at full load, switching frequency, peak primary current and peak-to-peak ripple specification gives C_{IN} greater than 2 µF. Mindful of the voltage coefficient of ceramic capacitors, select a 4.7-µF, 100-V capacitor with X7S or X7R dielectric in 1210 case size. The input capacitor RMS ripple current is given by Equation 24.

$$I_{CIN\text{-}RMS} = \frac{D \cdot I_{PRI\text{-}PK}}{2} \cdot \sqrt{\frac{4}{3 \cdot D} - 1} \tag{24}$$

ADVANCE INFORMATION

8.2.1.2.8 Feedback Resistor – R_{FB}

Select a feedback resistor, designated R_{FB}, of 158 kΩ based on the secondary winding voltage at the end of the flyback conduction interval (the sum of the 5-V output voltage and the Schottky diode forward voltage drop) reflected by the transformer turns ratio of 3 : 1. The forward voltage drop of the flyback diode is 0.3 V as its current approaches zero.

$$R_{FB} = \frac{(V_{OUT} + V_D) \cdot N_{PS}}{0.1\,mA} = \frac{(5\,V + 0.3\,V) \cdot 3}{0.1\,mA} = 158\,k\Omega \quad (25)$$

8.2.1.2.9 Thermal Compensation Resistor – R_{TC}

Select a resistor for output voltage thermal compensation, designated R_{TC}, based on Equation 26.

$$R_{TC} = \frac{R_{FB}}{N_{PS}} \cdot \frac{3\,mV/°C}{TC_{Diode}} = \frac{158\,k\Omega \cdot 3}{3 \cdot 1.2} = 130\,k\Omega \quad (26)$$

8.2.1.2.10 UVLO Resistors – R_{UV1}, R_{UV2}

Given $V_{IN(on)}$ and $V_{IN(off)}$ as the input voltage turn-on and turn-off thresholds of 9.5 V and 6.5 V, respectively, select the upper and lower UVLO resistors using the following expressions:

$$R_{UV1} = \frac{V_{IN(on)} \cdot \frac{V_{UVLO2}}{V_{UVLO1}} - V_{IN(off)}}{I_{UVLO}} = \frac{9.5\,V \cdot \frac{1.45\,V}{1.5\,V} - 6.5\,V}{5\,\mu A} = 536\,k\Omega \quad (27)$$

$$R_{UV2} = R_{UV1} \cdot \frac{V_{UVLO1}}{V_{IN(on)} - V_{UVLO1}} = 536\,k\Omega \cdot \frac{1.5\,V}{9.5\,V - 1.5\,V} = 100\,k\Omega \quad (28)$$



For technical solutions, industry trends, and insights for designing and managing power supplies, please refer to TI's *Power House* blog series.

8.2.1.3 Application Curves

Unless otherwise stated, application performance curves were taken at T_A = 25°C.

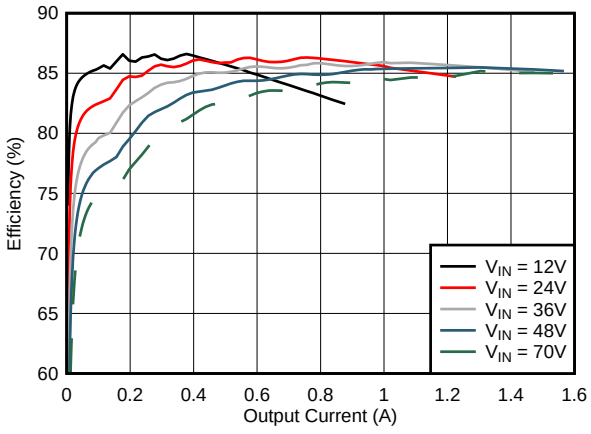


Figure 6. Efficiency (Linear Scale)

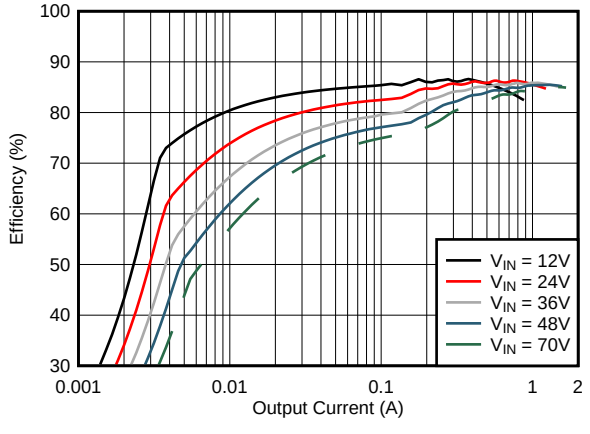


Figure 7. Efficiency (Log Scale)

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated

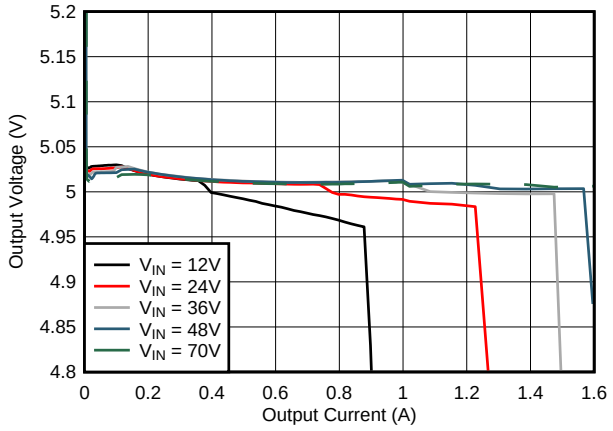


Figure 8. Load Regulation (Linear Scale)

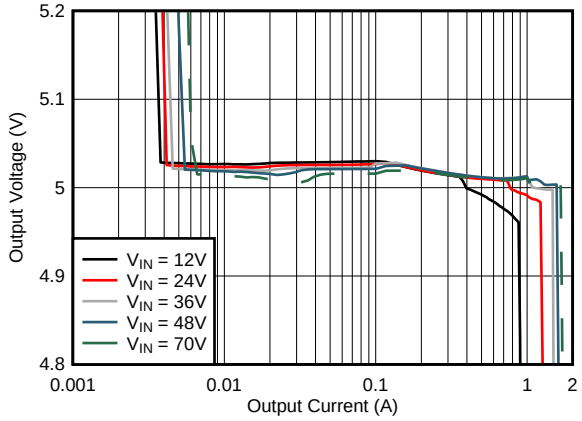


Figure 9. Load Regulation (Log Scale)



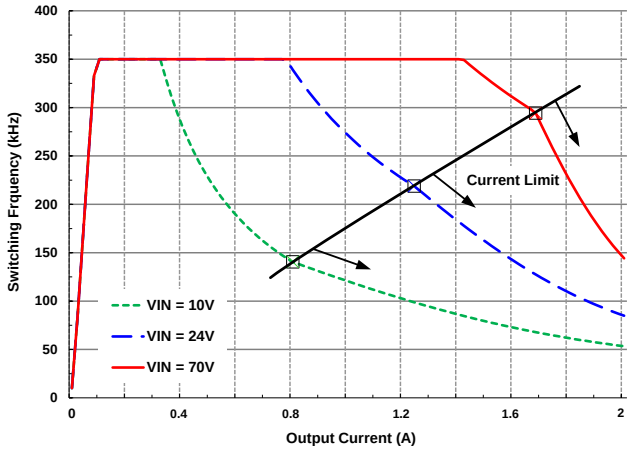


Figure 10. Switching Frequency Over Load and Line

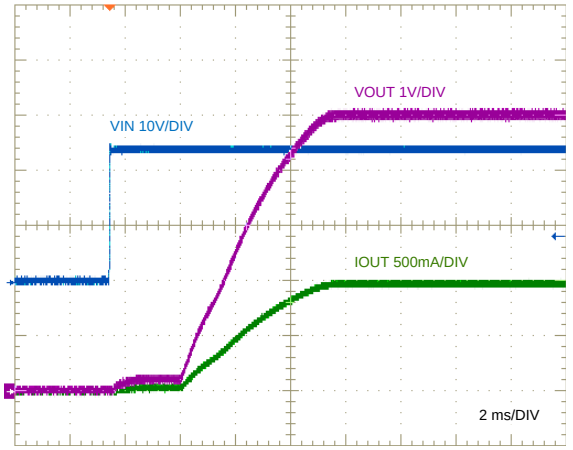


V_{IN} stepped to 24 V 5-Ω Load

Figure 11. Start-up Characteristic

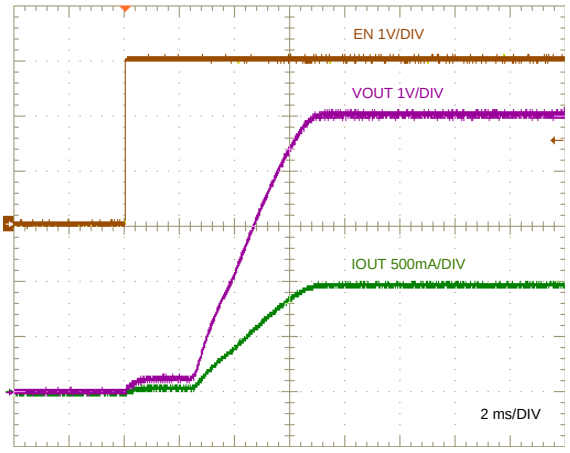

V_{IN} = 24 V 5-Ω Load


Figure 12. Enable ON Characteristic

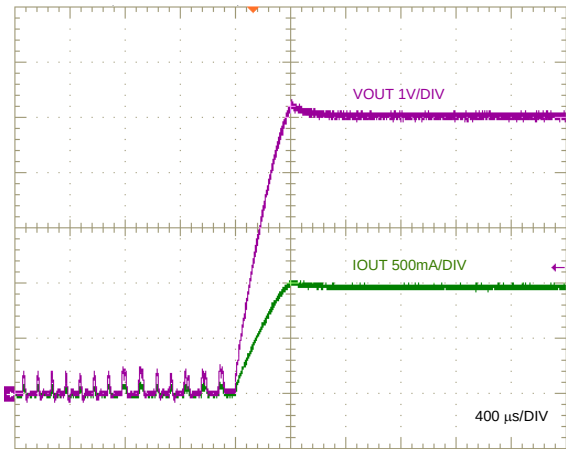

V_{IN} stepped to 48 V 5-Ω Load


Figure 13. Short Circuit Recovery

ADVANCE INFORMATION

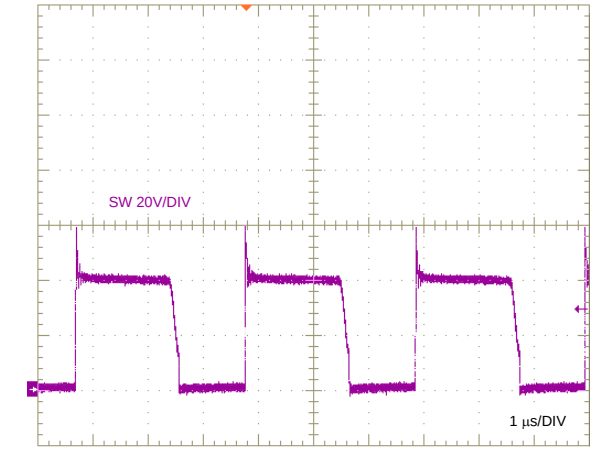


V_{IN} = 24 V I_{OUT} = 1 A

Figure 14. SW Node Voltage

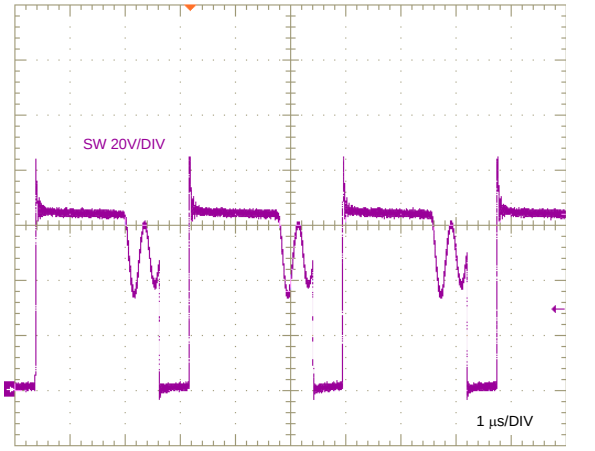


V_{IN} = 48 V I_{OUT} = 1 A

Figure 15. SW Node Voltage

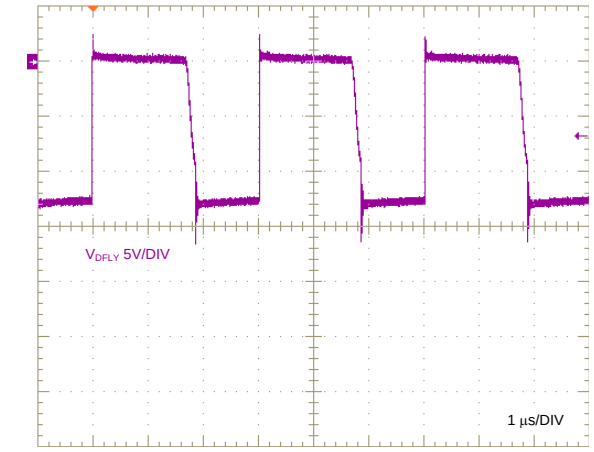

V_{IN} = 24 V I_{OUT} = 1 A

Figure 16. Flyback Diode Voltage

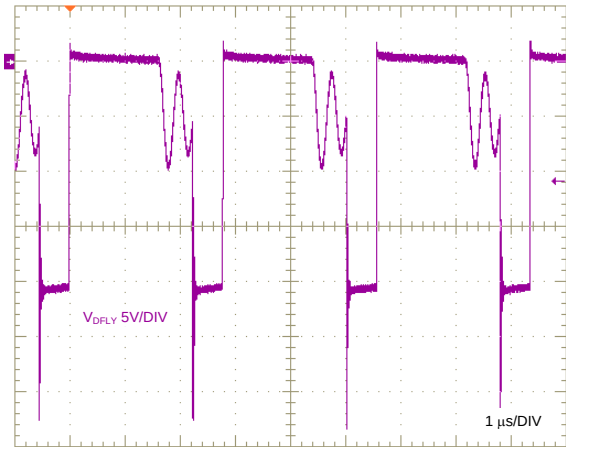

V_{IN} = 48 V I_{OUT} = 1 A


Figure 17. Flyback Diode Voltage

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated

8.2.2 Design 2: PSR Flyback Converter With Dual Outputs of 15 V and –8V at 200 mA

The schematic diagram of a dual-output flyback converter intended for isolated IGBT and SiC MOSFET gate drive power supply applications is given in Figure 18.

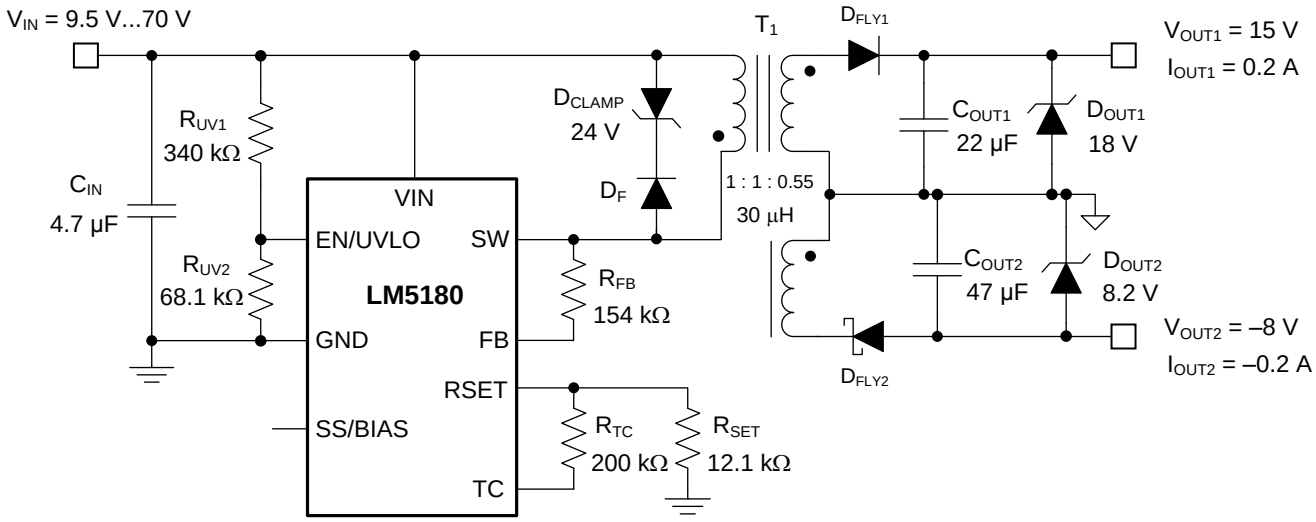

Copyright © 2018, Texas Instruments Incorporated

Figure 18. Schematic for Design 2 With $V_{IN(nom)}$ = 24 V, V_{OUT1} = 15 V, V_{OUT2} = –8 V, I_{OUT} = 200 mA

8.2.2.1 Design Requirements

The required input, output, and performance parameters for this application example are shown in Table 3.

Table 3. Design Parameters

DESIGN PARAMETER	VALUE
Input voltage range (steady state)	9.5 V to 70 V
Output 1 voltage and current	15 V, 0.2 A
Output 2 voltage and current	–8 V, –0.2 A
Input UVLO thresholds	9 V on, 7 V off
Output voltage regulation	±2%

The target full-load efficiency of this LM5180 design is 88% based on a nominal input voltage of 48 V and isolated output voltages of 15 V and –8 V sharing a common return. The selected flyback converter components are cited in Table 4, including multi-winding flyback transformer, input and output capacitors, rectifying diodes and flyback converter IC.

ADVANCE INFORMATION

Table 4. List of Components for Design 2

REF DES	QTY	SPECIFICATION	VENDOR	PART NUMBER
C_{IN}	1	4.7 µF, 100 V, X7S, 1210, ceramic	TDK	C3225X7S2A475M
			Murata	GRM32DC72A475KE01L
			Taiyo Yuden	HMK325C7475MN-TE
C_{OUT1}	1	22 µF, 25 V, X7R, 1210, ceramic	TDK	C3225X7R1E226M
			Murata	GRM32ER71E226KE15L
			Taiyo Yuden	TMK325B7226MM-TR
C_{OUT2}	1	47 µF, 10 V, X7R, 1210, ceramic	TDK	C3225X7R1A476M
			Murata	GRM32ER71A476ME15L
			Taiyo Yuden	LMK325B7476MM-TR
D_{FLY1}	1	Switching diode, fast recovery, 200 V, 1 A, SOD-123	DFLU1200-7	Diodes Inc.
D_{FLY2}	1	Schottky diode, 100 V, 1 A, SOD-123	PMEG10010ELR	Nexperia
D_{CLAMP}	1	Zener, 24 V, 1 W, PowerDI-123	DFLZ24-7	Diodes Inc.
D_F	1	Switching diode, 75 V, 0.3 A, SOD323	1N4148WS	Diodes Inc.
D_{OUT1}	1	Zener, 18 V, 5%, SOD523	BZX585-C18	Nexperia
D_{OUT2}	1	Zener, 8.2 V, 2%, SOD523	BZX585-B8V2	Nexperia
R_{FB}	1	154 kΩ, 1%, 0402	Std	Std
R_{SET}	1	12.1 kΩ, 1%, 0402	Std	Std
R_{TC}	1	200 kΩ, 1%, 0402	Std	Std
R_{UV1}	1	340 kΩ, 1%, 0603	Std	Std
R_{UV2}	1	68.1 kΩ, 1%, 0402	Std	Std
T_1	1	30 µH, 2 A, turns ratio 1 : 1: 0.55, 9 × 10 mm, SMT	Coilcraft	YA8916-BL
U_1	1	LM5180 PSR flyback converter, VSON-8	Texas Instruments	LM5180NGUR

ADVANCE INFORMATION

8.2.2.2 Detailed Design Procedure

Using the LM5180 quick-start calculator, components are selected based on the flyback converter specifications.

8.2.2.2.1 Flyback Transformer – T_1

Set the turns ratio of the transformer secondary windings using Equation 29, where N_{S1} and N_{S2} are the number of secondary turns for the respective outputs.

$$\frac{N_{S2}}{N_{S1}} = \frac{V_{OUT2} + V_{D2}}{V_{OUT1} + V_{D1}} = \frac{8\ V + 0.4\ V}{15\ V + 0.45\ V} = 0.55 \tag{29}$$

Choose a primary-secondary turns ratio for the 15-V output based on an approximate 60% max duty cycle at minimum input voltage using Equation 30. The transformer turns ratio for both outputs is thus specified as 1 : 1 : 0.55.

$$N_{PS} = \frac{D_{MAX}}{1 - D_{MAX}} \cdot \frac{V_{IN(min)}}{V_{OUT} + V_D} = \frac{0.6}{1 - 0.6} \cdot \frac{9.5\,V}{15\,V + 0.3\,V} \approx 1 \tag{30}$$

Select a magnetizing inductance based on the minimum off-time constraint using Equation 31. Choose a value of 30 µH with a saturation current of 2 A for this application.

$$L_{MAG} \geq \frac{(V_{OUT} + V_D) \cdot N_{PS} \cdot t_{OFF\text{-}MIN}}{I_{PRI\text{-}PK(FFM)}} = \frac{(15\,V + 0.3\,V) \cdot 1 \cdot 500\,ns}{0.3\,A} = 25.5\,\mu H \tag{31}$$

8.2.2.2.2 Flyback Diodes – D_{FLY1} and D_{FLY2}

The flyback diode reverse voltages for the positive and negative outputs are given respectively by Equation 32 and Equation 33.

Copyright © 2018, Texas Instruments Incorporated

$$V_{D1\text{-}REV} \geq \frac{V_{IN(max)}}{N_{PS}} + V_{OUT1} = \frac{70\,V}{1} + 15\,V = 85\,V \tag{32}$$

$$V_{D2\text{-}REV} \geq \frac{V_{IN(max)}}{N_{PS}} + \left|V_{OUT2}\right| = 70\,V \cdot 0.55 + 8\,V = 46.5\,V \tag{33}$$

Choose a 200-V, 1-A ultra-fast switching diode and a 100-V, 1-A Schottky diode for the positive and negative outputs, respectively, to allow some margin for inevitable voltage overshoot and ringing related to leakage inductance and diode capacitance. If needed, use a diode RC snubber circuit, for example 100 Ω and 22 pF, to mitigate such overshoot and ringing.

8.2.2.2.3 Input Capacitor – C_{IN}

The input capacitor, C_{IN}, filters the primary-side triangular current waveform. To prevent large ripple voltage, use a low-ESR ceramic input capacitor sized according to Equation 23 for the RMS ripple current given by Equation 24. In this design example, choose a 4.7-µF, 100-V ceramic input capacitor with X7S dielectric and 1210 footprint.

8.2.2.2.4 Feedback Resistor – R_{FB}

Install a 154-kΩ resistor from SW to FB based on an output voltage setpoint of 15 V (plus a flyback diode voltage drop) reflected to the primary by a transformer turns ratio of unity.

$$R_{FB} = \frac{\left(V_{OUT} + V_D\right) \cdot N_{PS}}{0.1\,mA} = \frac{\left(15\,V + 0.3\,V\right) \cdot 1}{0.1\,mA} = 154\ k\Omega \tag{34}$$

8.2.2.2.5 UVLO Resistors – R_{UV1}, R_{UV2}

Given $V_{IN(on)}$ and $V_{IN(off)}$ as the input voltage turn-on and turn-off thresholds of 9 V and 7 V, respectively, select the upper and lower UVLO resistors using Equation 35 and Equation 36.

$$R_{UV1} = \frac{V_{IN(on)} \cdot \frac{V_{UVLO2}}{V_{UVLO1}} - V_{IN(off)}}{I_{UVLO}} = \frac{9\ V \cdot \frac{1.45\ V}{1.5\ V} - 7\ V}{5\ \mu A} = 340\,k\Omega \tag{35}$$

$$R_{UV2} = R_{UV1} \cdot \frac{V_{UVLO1}}{V_{IN(on)} - V_{UVLO1}} = 340\ k\Omega \cdot \frac{1.5\ V}{9\ V - 1.5\ V} = 68\ k\Omega \tag{36}$$

ADVANCE INFORMATION

8.2.2.3 Application Curves

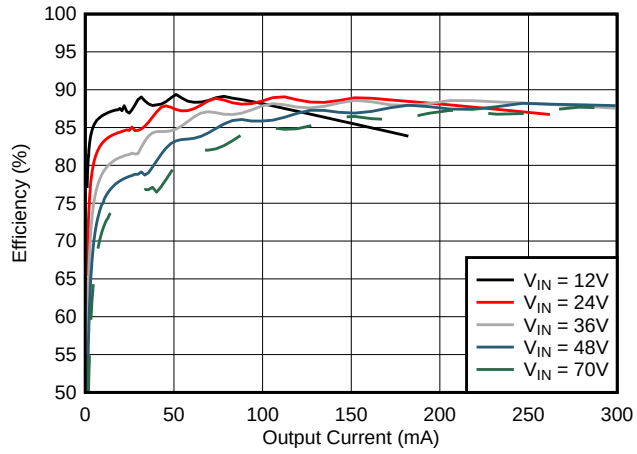


Figure 19. Efficiency (Linear Scale)

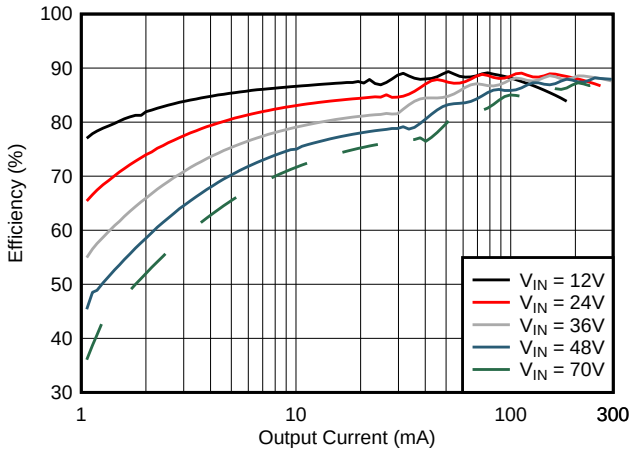


Figure 20. Efficiency (Log Scale)

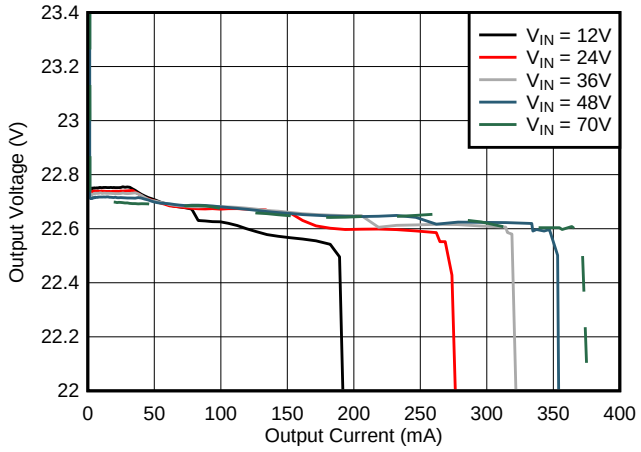


Figure 21. Load Regulation (Linear Scale)

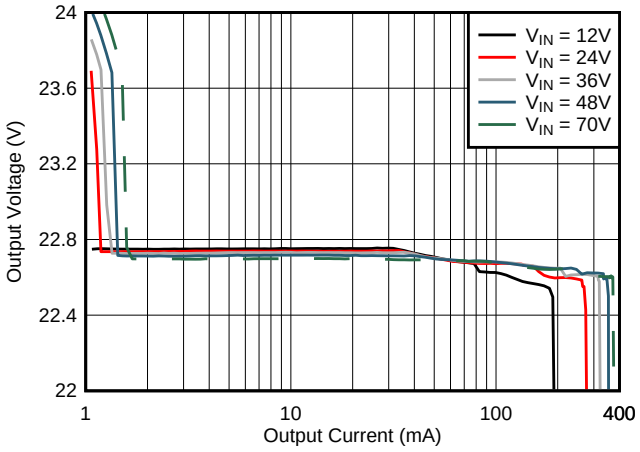


Figure 22. Load Regulation (Log Scale)

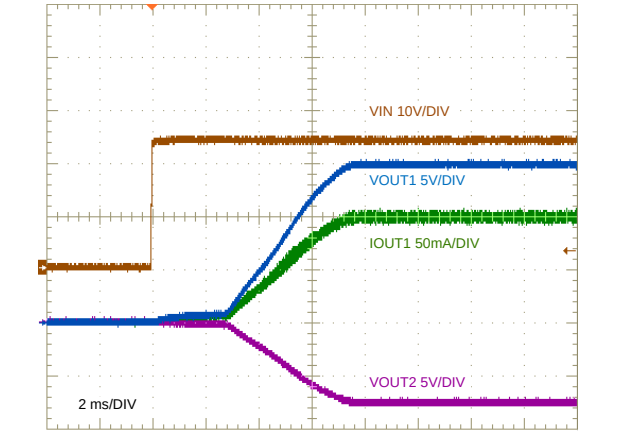


Figure 23. Start-Up Characteristic


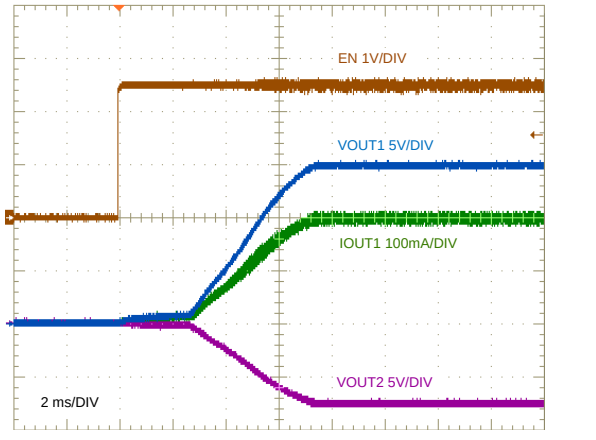


Figure 24. ENABLE ON Characteristic


ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated

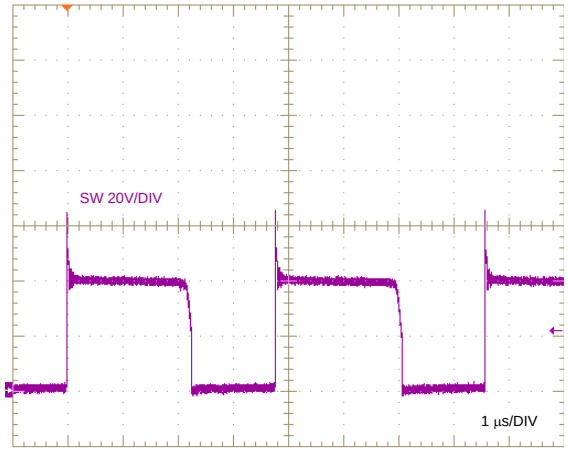


V_{IN} = 24 V

Figure 25. SW Node Voltage, Full Load

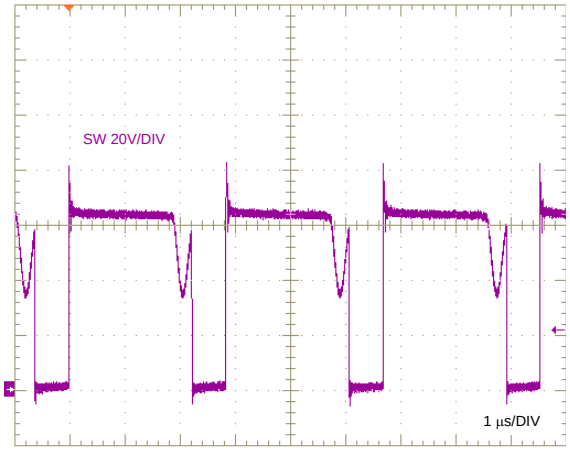


V_{IN} = 48 V

Figure 26. SW Node Voltage, Full Load

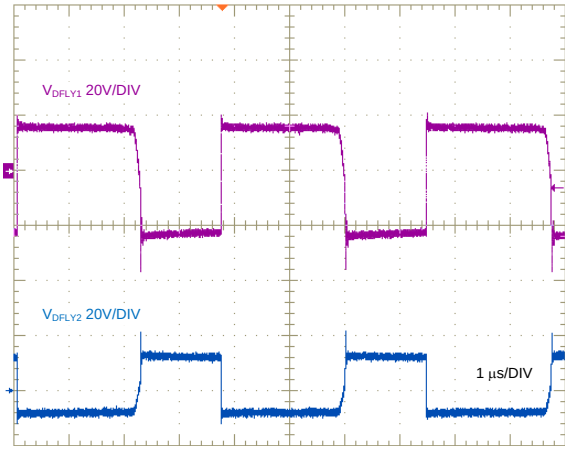


V_{IN} = 24 V

Figure 27. Flyback Diode Voltages, Full Load

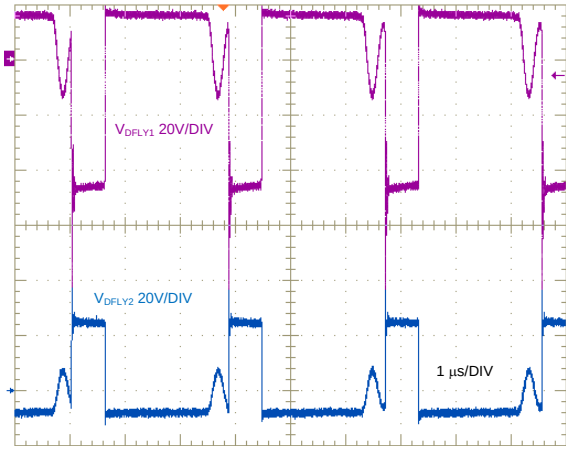


V_{IN} = 48 V

Figure 28. Flyback Diode Voltages, Full Load

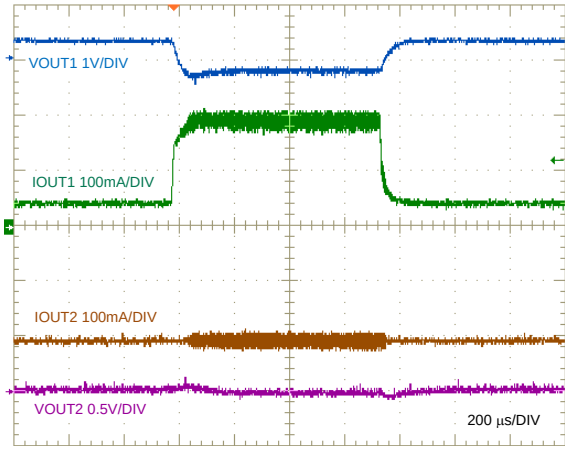

V_{IN} = 24 V I_{OUT1} = 0.2 A

Figure 29. Output 1 Load Transient, 50 mA to 200 mA

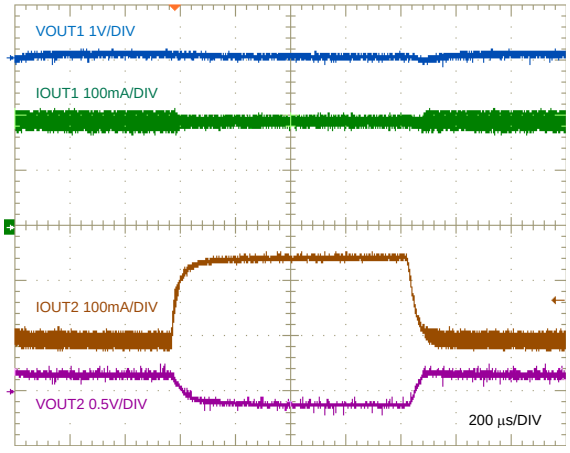

V_{IN} = 24 V I_{OUT2} = 0.2 A


Figure 30. Output 2 Load Transient, 50 mA to 200 mA

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated

8.2.3 Design 3: PSR Flyback Converter With Stacked Dual Outputs of 24 V and 5 V

The schematic diagram of a dual-output flyback converter with high-voltage secondary stacked on the low-voltage secondary winding is given in Figure 31. This configuration reduces the number of turns for the high-voltage output, resulting in lower secondary-to-secondary leakage inductance for improved output voltage cross regulation.

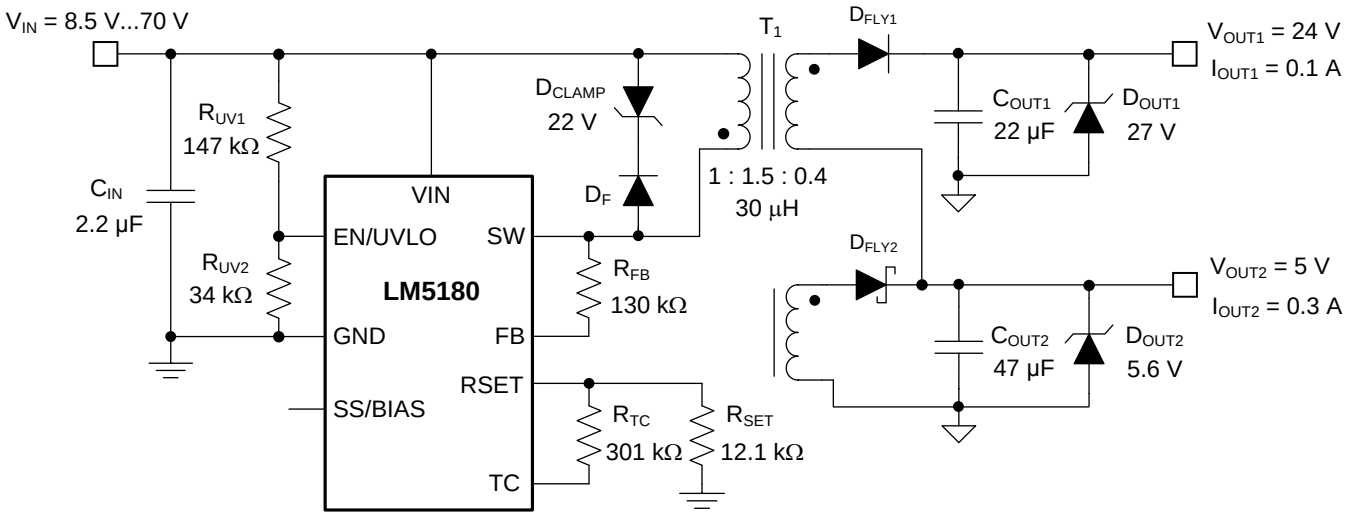

Copyright © 2018, Texas Instruments Incorporated

Figure 31. Schematic for Design 3 With $V_{IN(nom)}$ = 24 V, V_{OUT1} = 24 V, V_{OUT2} = 5 V

8.2.3.1 Design Requirements

The required input, output, and performance parameters for this application example are shown in Table 5.

Table 5. Design Parameters

DESIGN PARAMETER	VALUE
Input voltage range (steady state)	8.5 V to 70 V
Output 1 voltage and current	24 V, 0.1 A
Output 2 voltage and current	5 V, 0.3 A
Input UVLO thresholds	8 V on, 7 V off
Output voltage regulation	±1%

The target full-load efficiency of this LM5180 design is 88% based on a nominal input voltage of 24 V and isolated output voltages of 24 V and 5 V. The selected flyback converter components are cited in Table 6, including multi-winding flyback transformer, input and output capacitors, rectifying diodes, and converter IC.

ADVANCE INFORMATION

Table 6. List of Components for Design 3

REF DES	QTY	SPECIFICATION	VENDOR	PART NUMBER
C_{IN}	1	2.2 µF, 100 V, X7R, 1210, ceramic	TDK	C3225X7S2A475M
			Taiyo Yuden	HMK325B7225MM-T
		2.2 µF, 100 V, X7S, 1206, ceramic	TDK	C3216X7S2A225K160AB
			Taiyo Yuden	HMK316AC7225KL-TE
C_{OUT1}	1	10 µF, 50 V, X7R, 1210, ceramic	Taiyo Yuden	UMK325AB7106MM-T
		10 µF, 50 V, X7S, 1210, ceramic	Murata	C3225X7R1H106M
			TDK	C3225X7R1H106M
C_{OUT2}	1	47 µF, 10 V, X7R, 1210, ceramic	Murata	GRM32ER71A476ME15L
D_{FLY1}	1	Switching diode, fast recovery, 200 V, 1 A, SOD-123	DFLU1200	Diodes Inc.
D_{FLY2}	1	Schottky diode, 40 V, 1 A, SOD-123	B140HW	Diodes Inc.
D_{CLAMP}	1	Zener, 22 V, 1 W, PowerDI-123	DFLZ22-7	Diodes Inc.
D_F	1	Switching diode, 75 V, 0.25 A, SOD-323	CMDD4448	Central Semi
D_{OUT1}	1	Zener, 27 V, 2%, SOD-523	BZX585-B27	Nexperia
D_{OUT2}	1	Zener, 5.6 V, 2%, SOD-523	BZX585-B5V6	Nexperia
R_{FB}	1	130 kΩ, 1%, 0402	Std	Std
R_{SET}	1	12.1 kΩ, 1%, 0402	Std	Std
R_{TC}	1	301 kΩ, 1%, 0402	Std	Std
R_{UV1}	1	147 kΩ, 1%, 0603	Std	Std
R_{UV2}	1	34 kΩ, 1%, 0402	Std	Std
T_1	1	30 µH, 2 A, turns ratio 1 : 1.5 : 0.4, 9 × 10 mm, SMT	Coilcraft	YA8864-BL
U_1	1	LM5180 PSR flyback converter, VSON-8	Texas Instruments	LM5180NGUR

8.2.3.2 Detailed Design Procedure

Components are selected based on the converter specifications using the LM5180 quick-start calculator. The design procedure is similar to that outlined for Designs 1 and 2 previously.

8.2.3.2.1 Flyback Transformer – T_1

The 24-V output is DC stacked on top of the 5-V output as they share a common return connection. This enables lower secondary-to-secondary leakage inductance for better cross regulation and also reduced rectifier diode reverse voltage stress. Choose a primary-secondary turns ratio for the effective 19-V secondary based on an approximate 60% max duty cycle at minimum input voltage using Equation 37.

$$N_{PS} = \frac{D_{MAX}}{1 - D_{MAX}} \cdot \frac{V_{IN(min)}}{V_{OUT} + V_D} = \frac{0.6}{1 - 0.6} \cdot \frac{8.5\,V}{19\,V + 0.3\,V} = 0.66 \quad (37)$$

Set the turns ratio of the transformer secondary windings using Equation 38. The transformer turns ratio for both outputs is thus specified as 1 : 1.5 : 0.4.

$$\frac{N_{S2}}{N_{S1}} = \frac{V_{OUT2} + V_{D2}}{V_{OUT1} + V_{D1}} = \frac{5\ V + 0.3\ V}{19\ V + 0.3\ V} = 0.275 \quad (38)$$

As before, select a magnetizing inductance of 30 µH based on the minimum off-time constraint and specify a saturation current of 2 A to handle the peak primary current.

8.2.3.2.2 Feedback Resistor – R_{FB}

Install a 130-kΩ resistor from SW to FB based on the secondary winding voltage (the sum of the 5-V output voltage and the Schottky diode forward voltage drop) reflected by the relevant transformer turns ratio, which in this design is 1 : 0.4 or 2.5 : 1.

$$R_{FB} = \frac{(V_{OUT} + V_D) \cdot N_{PS}}{0.1\,mA} = \frac{(5\,V + 0.25\,V) \cdot 2.5}{0.1\,mA} = 130\ k\Omega \quad (39)$$

ADVANCE INFORMATION

8.2.3.2.3 UVLO Resistors – R_{UV1}, R_{UV2}

Given $V_{IN(on)}$ and $V_{IN(off)}$ as the input voltage turn-on and turn-off thresholds of 8 V and 7 V, respectively, select the upper and lower UVLO resistors using the following expressions:

$$R_{UV1} = \frac{V_{IN(on)} \cdot \frac{V_{UVLO2}}{V_{UVLO1}} - V_{IN(off)}}{I_{UVLO}} = \frac{8\ V \cdot \frac{1.45\ V}{1.5\ V} - 7\ V}{5\ \mu A} = 147\ k\Omega \quad (40)$$

$$R_{UV2} = R_{UV1} \cdot \frac{V_{UVLO1}}{V_{IN(on)} - V_{UVLO1}} = 147\ k\Omega \cdot \frac{1.5\ V}{8\ V - 1.5\ V} = 34\ k\Omega \quad (41)$$

8.2.3.3 Application Curves



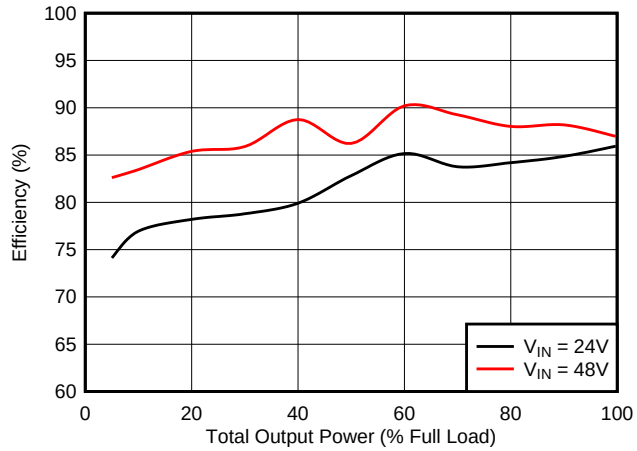


Figure 32. Efficiency

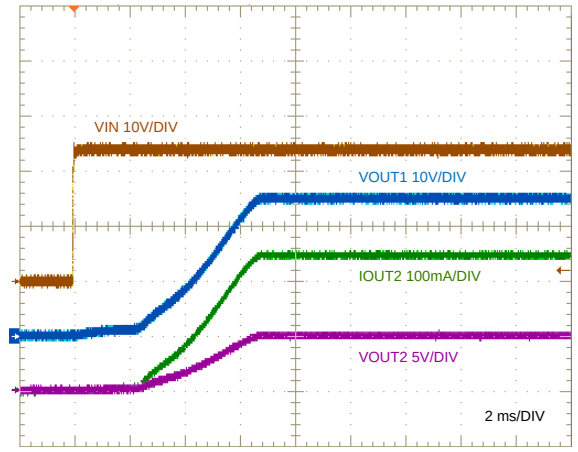


V_{IN} ramped to 24 V 240-Ω and 20-Ω Loads

Figure 33. Start-Up Characteristic

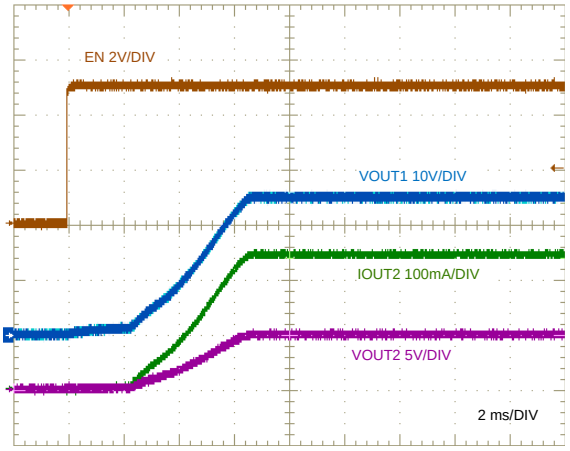

V_{IN} = 24 V 240-Ω and 20-Ω Loads

Figure 34. ENABLE ON Characteristic

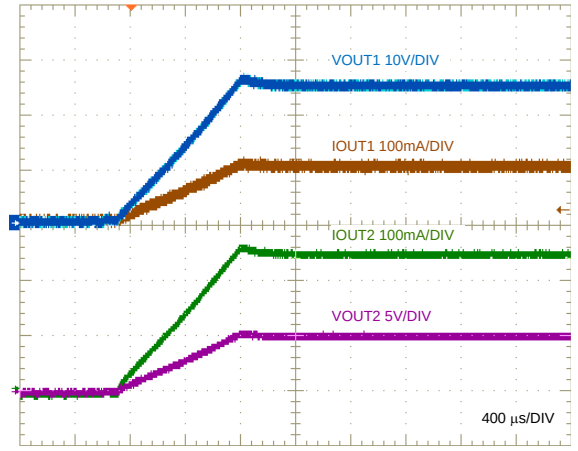


V_{IN} = 24 V 240-Ω and 20-Ω Loads

Figure 35. Recovery From Short Circuit


ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated

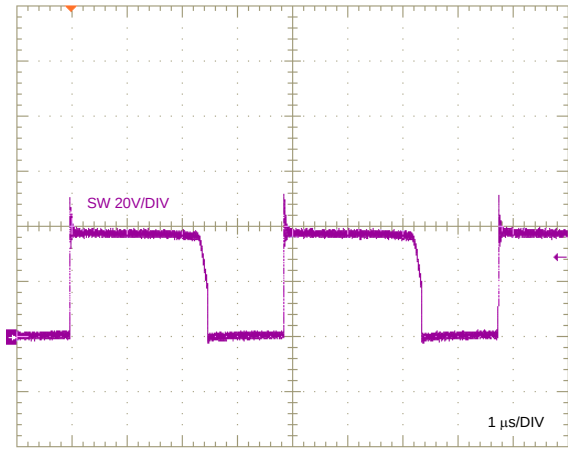


V_{IN} = 24 V

Figure 36. SW Node Voltage, Full Load

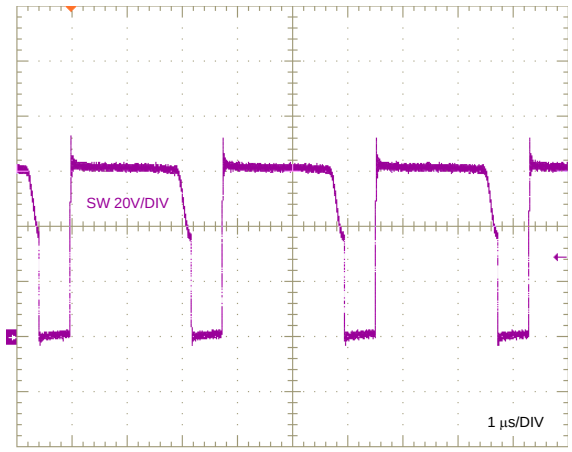


V_{IN} = 48 V

Figure 37. SW Node Voltage, Full Load

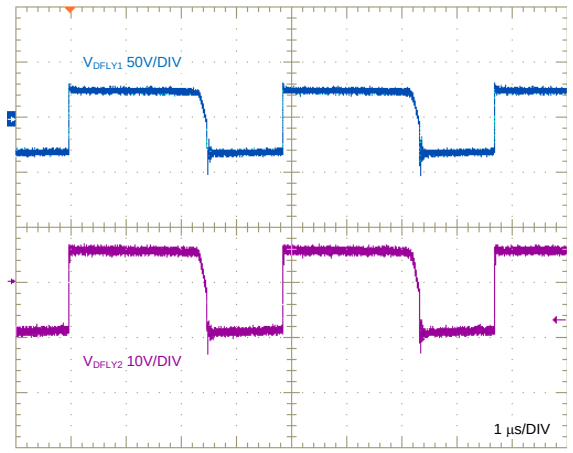


V_{IN} = 24 V

Figure 38. Flyback Diode Voltages, Full Load

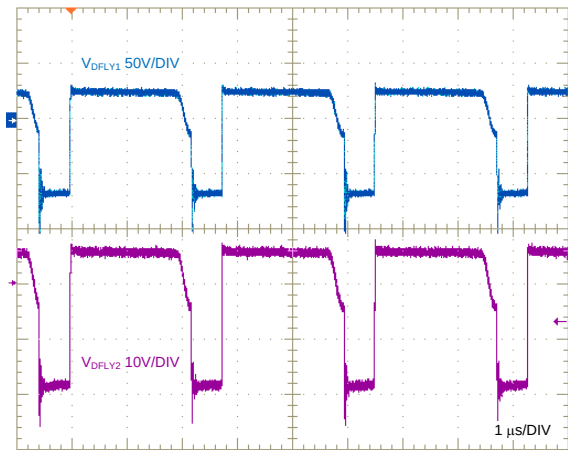


V_{IN} = 48 V

Figure 39. Flyback Diode Voltages, Full Load

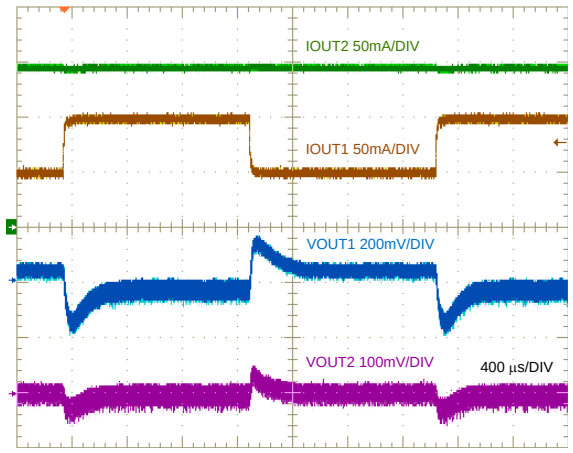

V_{IN} = 24 V I_{OUT2} = 150 mA

Figure 40. Output 1 Load Transient, 50 mA to 100 mA

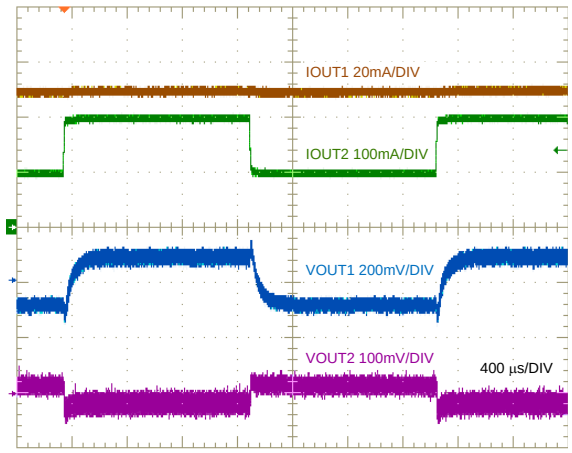

V_{IN} = 24 V I_{OUT1} = 50 mA

Figure 41. Output 2 Load Transient, 100 mA to 200 mA

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated

9 Power Supply Recommendations

The LM5180 flyback converter is designed to operate from a wide input voltage range from 4.5 V to 70 V. The characteristics of the input supply must be compatible with the Absolute Maximum Ratings and Recommended Operating Conditions. In addition, the input supply must be capable of delivering the required input current to the fully-loaded regulator. Estimate the average input current with Equation 42.

$$I_{IN} = \frac{V_{OUT} \cdot I_{OUT}}{V_{IN} \cdot \eta}$$

where

- η is the efficiency (42)

If the converter is connected to an input supply through long wires or PCB traces with a large impedance, special care is required to achieve stable performance. The parasitic inductance and resistance of the input cables may have an adverse affect on converter operation. The parasitic inductance in combination with the low-ESR ceramic input capacitors form an underdamped resonant circuit. This circuit can cause overvoltage transients at VIN each time the input supply is cycled ON and OFF. The parasitic resistance causes the input voltage to dip during a load transient. If the regulator is operating close to the minimum input voltage, this dip can cause false UVLO fault triggering and a system reset. The best way to solve such issues is to reduce the distance from the input supply to the regulator and use an aluminum electrolytic input capacitor in parallel with the ceramics. The moderate ESR of the electrolytic capacitors helps to damp the input resonant circuit and reduce any voltage overshoots. A capacitance in the range of 10 µF to 47 µF is usually sufficient to provide input damping and helps to hold the input voltage steady during large load transients. A typical ESR of 0.25 Ω provides enough damping for most input circuit configurations.

An EMI input filter is often used in front of the regulator that, unless carefully designed, can lead to instability as well as some of the effects mentioned above. The application report *Simple Success with Conducted EMI for DC-DC Converters* provides helpful suggestions when designing an input filter for any switching regulator.

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated

10 Layout

The performance of any switching converter depends as much upon PCB layout as it does the component selection. The following guidelines are provided to assist with designing a PCB with the best power conversion performance, thermal performance, and minimized generation of unwanted EMI. Figure 42 and Figure 43 provide layout examples for single-output and dual-output designs, respectively.

10.1 Layout Guidelines

PCB layout is a critical for good power supply design. There are several paths that conduct high slew-rate currents or voltages that can interact with transformer leakage inductance or parasitic capacitance to generate noise and EMI or degrade the power supply's performance.

1. Bypass the VIN pin to GND with a low-ESR ceramic capacitor, preferably of X7R or X7S dielectric. Place C_{IN} as close as possible to the LM5180 VIN and GND pins. Ground return paths for the input capacitor(s) must consist of localized top-side planes that connect to the GND pin and exposed PAD.
2. Minimize the loop area formed by the input capacitor connections and the VIN and GND pins.
3. Locate the transformer close to the SW pin. Minimize the area of the SW trace or plane to prevent excessive e-field or capacitive coupling.
4. Minimize the loop area formed by the diode-Zener clamp circuit connections and the primary winding terminals of the transformer.
5. Minimize the loop area formed by the flyback rectifying diode, output capacitor and the secondary winding terminals of the transformer.
6. Tie the GND pin directly to the power pad under the device and to a heat-sinking PCB ground plane.
7. Use a ground plane in one of the middle layers as a noise shielding and heat dissipation path.
8. Have a single-point ground connection to the plane. Route the return connections for the reference resistor, soft-start, and enable components directly to the GND pin. This prevents any switched or load currents from flowing in analog ground traces. If not properly handled, poor grounding results in degraded load regulation or erratic output voltage ripple behavior.
9. Make V_{IN+}, V_{OUT+} and ground bus connections short and wide. This reduces any voltage drops on the input or output paths of the converter and maximizes efficiency.
10. Minimize trace length to the FB pin. Locate the feedback resistor close to the FB pin.
11. Locate components R_{SET}, R_{TC} and C_{SS} as close as possible to their respective pins. Route with minimal trace lengths.
12. Place a capacitor between input and output return connections to route common-mode noise currents directly back to their source.
13. Provide adequate heatsinking for the LM5180 to keep the junction temperature below 150°C. For operation at full rated load, the top-side ground plane is an important heat-dissipating area. Use an array of heat-sinking vias to connect the exposed PAD to the PCB ground plane. If the PCB has multiple copper layers, connect these thermal vias to inner-layer ground planes. The connection to V_{OUT+} provides heatsinking for the flyback diode.

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated

10.2 Layout Examples

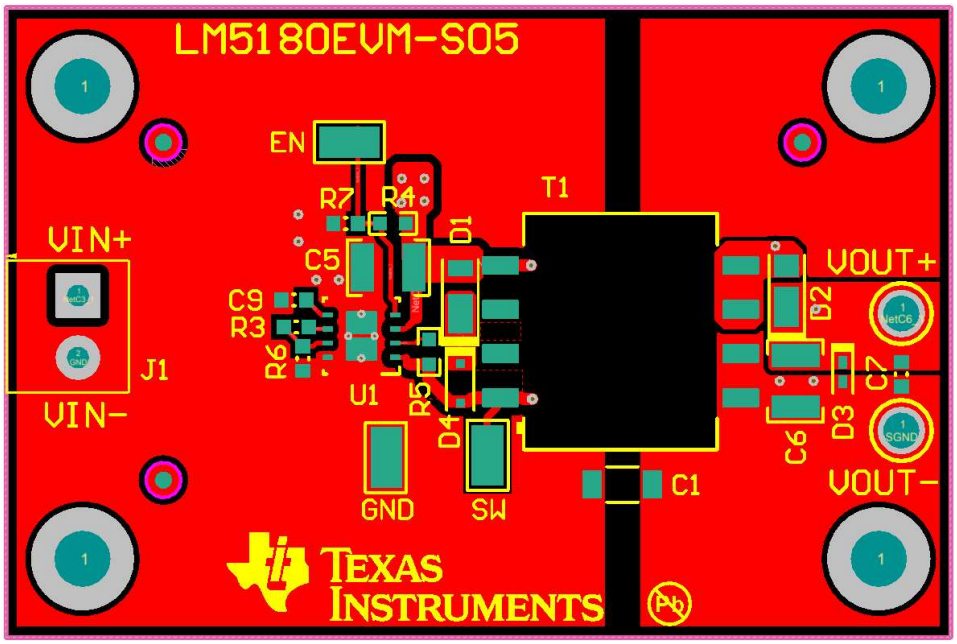


Figure 42. LM5180 Single-Output PCB Layout

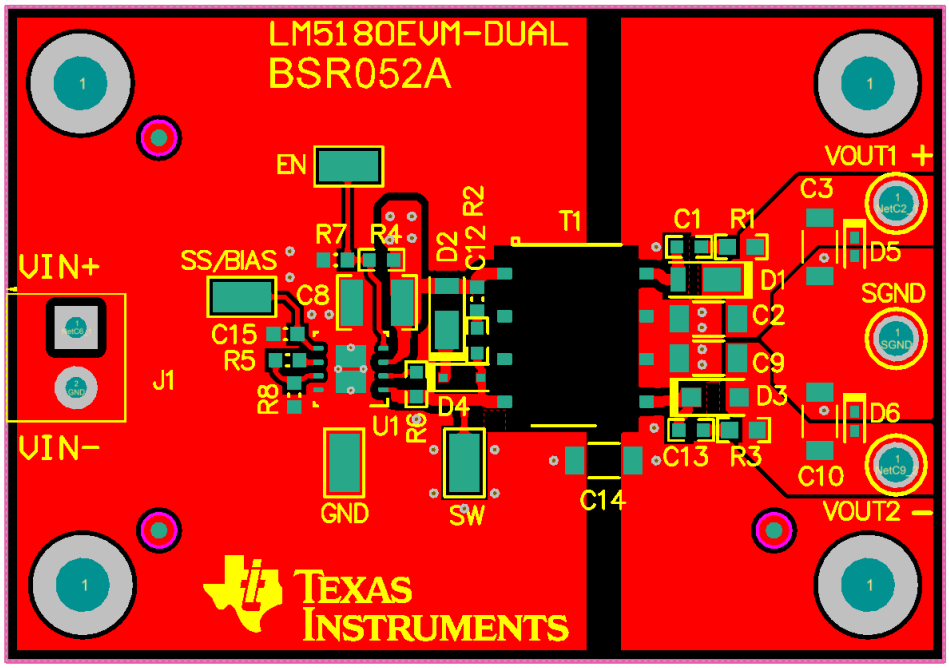


Figure 43. LM5180 Dual-Output PCB Layout

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated

11 Device and Documentation Support

11.1 Device Support

11.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

11.1.2 Development Support

For development support, see the following:

- LM5180 *Quick-start Calculator*
- LM5180 *Simulation Models*
- For TI's reference design library, visit TIDesigns
- For TI's WEBENCH Design Environment, visit the WEBENCH® Design Center

11.1.3 Custom Design With WEBENCH® Tools

Click here to create a custom design using the LM5180 device with WEBENCH® Power Designer.

1. Start by entering the input voltage (V_{IN}), output voltage (V_{OUT}), and output current (I_{OUT}) requirements.
2. Optimize the design for key parameters such as efficiency, footprint, and cost using the optimizer dial.
3. Compare the generated design with other possible solutions from Texas Instruments.

The WEBENCH Power Designer provides a customized schematic along with a list of materials with real-time pricing and component availability.

In most cases, these actions are available:

- Run electrical simulations to see important waveforms and circuit performance
- Run thermal simulations to understand board thermal performance
- Export customized schematic and layout into popular CAD formats
- Print PDF reports for the design, and share the design with colleagues

Get more information about WEBENCH tools at www.ti.com/WEBENCH.

11.2 Documentation Support

11.2.1 Related Documentation

For related documentation see the following:

- *LM5180EVM-S05 EVM User's Guide* (SNVU592)
- *Under the Hood of Flyback SMPS Designs* (SLUP261)
- *Flyback Transformer Design Considerations for Efficiency and EMI* (SLUP338)
- White Papers:
  - *Valuing Wide VIN, Low EMI Synchronous Buck Circuits for Cost-driven, Demanding Applications* (SLYY104)
  - *An Overview of Conducted EMI Specifications for Power Supplies* (SLYY136)
  - *An Overview of Radiated EMI Specifications for Power Supplies* (SLYY142)
- TI Designs:
  - *Snubberless Non-Isolated AC/DC Flyback Converter Reference Design with Simplified Transformer* (TIDUAN6)
- TI Blogs:
  - *Flyback Converters: Two Outputs are Better Than One*
  - *Common Challenges When Choosing the Auxiliary Power Supply for Your Server PSU*
  - *Maximizing PoE PD Efficiency on a Budget*

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated

Documentation Support (continued)

- *AN-2162: Simple Success with Conducted EMI from DC-DC Converters* (SNVA489)
- *Automotive Cranking Simulator User's Guide* (SLVU984)
- *Using New Thermal Metrics* (SBVA025)
- *Semiconductor and IC Package Thermal Metrics* (SPRA953)

11.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, go to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register for a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

11.4 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community ***TI's Engineer-to-Engineer (E2E) Community.*** Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support ***TI's Design Support*** Quickly find helpful E2E forums along with design support tools and contact information for technical support.

11.5 Trademarks

E2E is a trademark of Texas Instruments.
WEBENCH is a registered trademark of Texas Instruments.
All other trademarks are the property of their respective owners.

11.6 Electrostatic Discharge Caution

This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

11.7 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

12 Mechanical, Packaging, and Orderable Information

The following pages have mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated


PACKAGE OUTLINE

NGU0008C



WSON - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

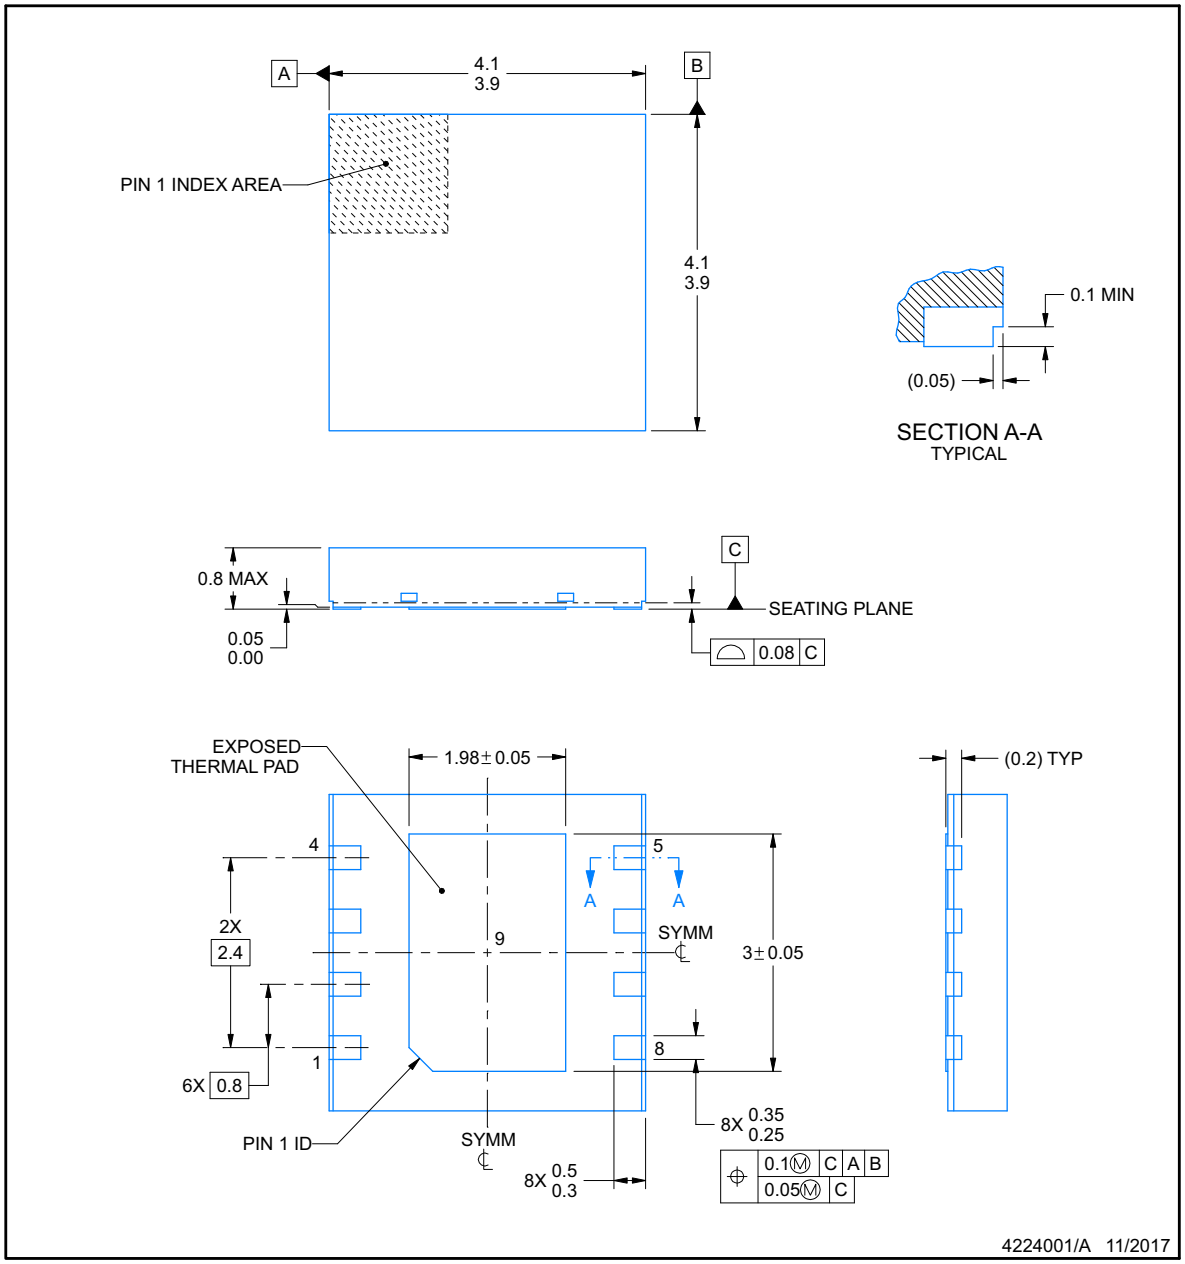

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated


ADVANCE INFORMATION

EXAMPLE BOARD LAYOUT


NGU0008C

WSON - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

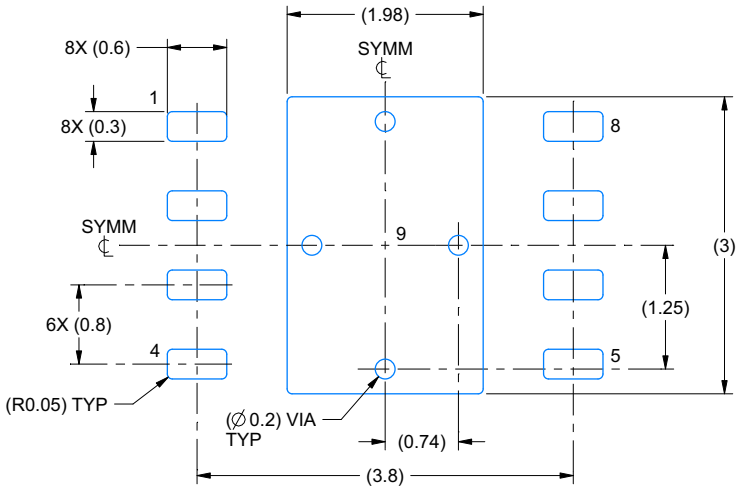

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

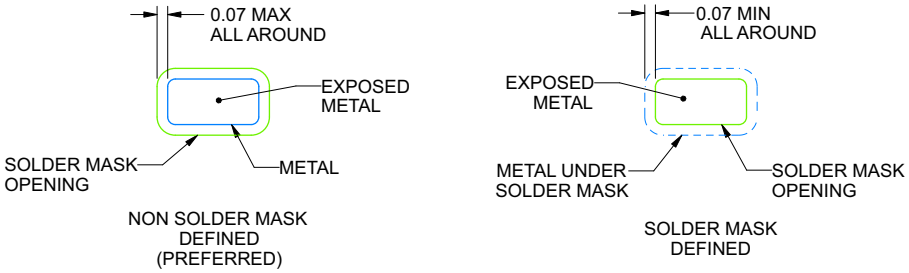

SOLDER MASK DETAILS

4224001/A 11/2017

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

Copyright © 2018, Texas Instruments Incorporated

EXAMPLE STENCIL DESIGN

NGU0008C **WSON - 0.8 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD

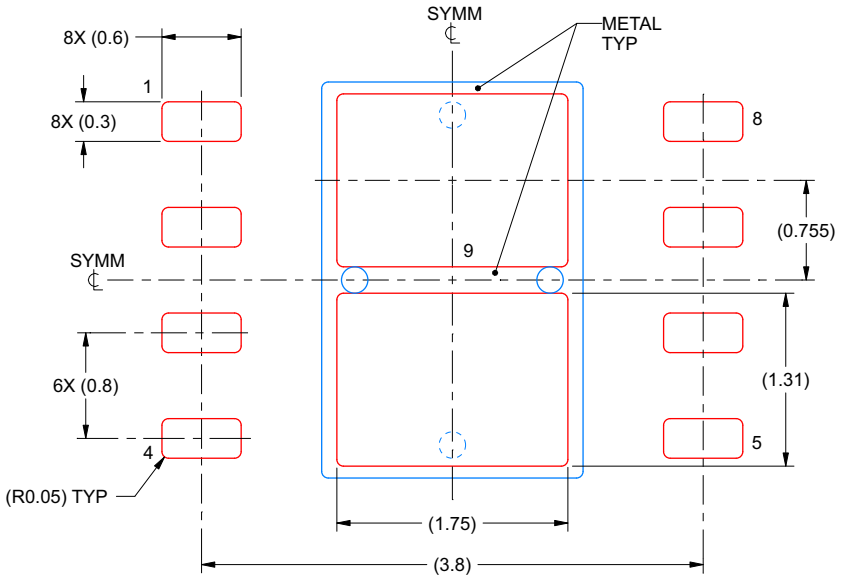

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 9:
77% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:20X

4224001/A 11/2017

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

ADVANCE INFORMATION

Copyright © 2018, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
LM5180NGUR	PREVIEW	WSON	NGU	8	4500	TBD	Call TI	Call TI	-40 to 150		
LM5180NGUT	PREVIEW	WSON	NGU	8	250	TBD	Call TI	Call TI	-40 to 150		
PM5180NGUT	PREVIEW	WSON	NGU	8	250	TBD	Call TI	Call TI	-40 to 150		

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".
RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.
Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


OTHER QUALIFIED VERSIONS OF LM5180 :

- Automotive: LM5180-Q1

NOTE: Qualified Version Definitions:


- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects


NGU0008B

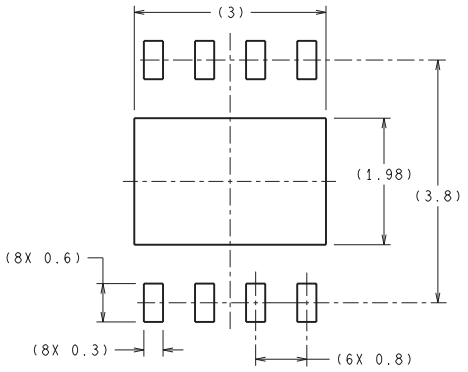



RECOMMENDED LAND PATTERN

DIMENSIONS ARE IN MILLIMETERS
DIMENSIONS IN ( ) FOR REFERENCE ONLY



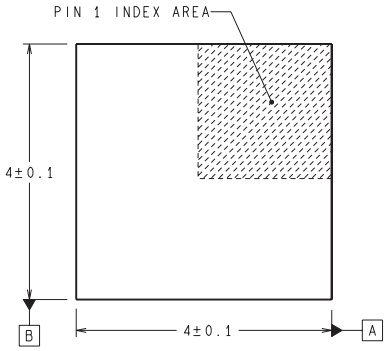



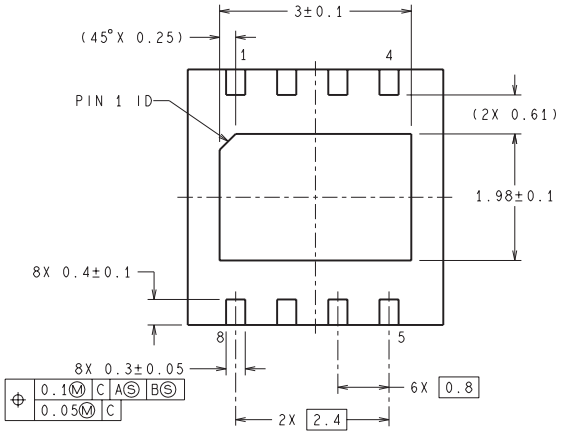

SDC08B (Rev A)

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2018, Texas Instruments Incorporated