
TriQuint SEMICONDUCTOR

Data Sheet

Part Number 855810
942.5 MHz SAW Filter


Features

- For EGSM applications
- Usable bandwidth 35 MHz
- High attenuation
- No impedance matching required for operation at 50 Ω
- Single-ended operation
- Ceramic Surface Mount Package (SMP)
- Hermetic
- RoHS compliant (2002/95/EC), Pb-free

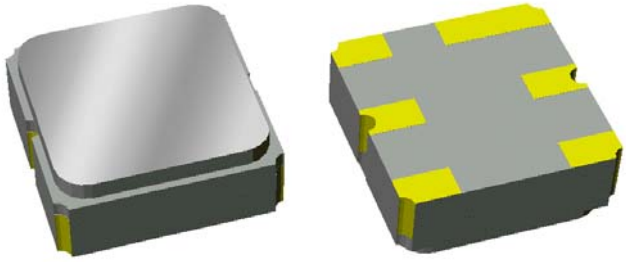

Package

Surface Mount 3.00 x 3.00 x 1.22 mm

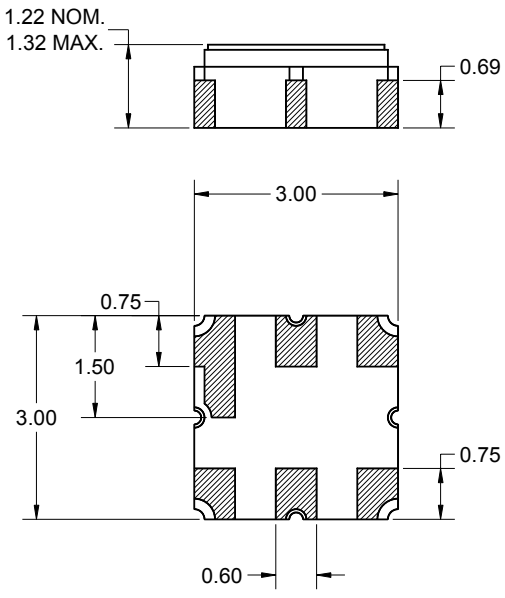


Dimensions shown are nominal in millimeters
All tolerances are ±0.15mm except overall length and width ±0.10mm

Body: Al_2O_3 ceramic
Lid: *Kovar*, *Ni* plated
Terminations: *Au* plating 0.5 - 1.0μm, over a 2 - 6μm *Ni* plating

Pin Configuration

Bottom View



Pin No.	Description
2,5	Input/Output
1,3,4,6	Case ground

Electrical Specifications [1]

Operating Temperature Range: [2] -40 to +85 °C


Parameter [3]		Minimum	Typical	Maximum	Unit
Center Frequency		-	942.5	-	MHz
Maximum Insertion Loss					
925 - 960 MHz	(+10 to +35 °C)	-	3.2	3.5	dB
925 - 960 MHz	(-40 to +85 °C)	-	-	4.5	dB
Absolute Attenuation					
0 - 880 MHz		40	50	-	dB
880 - 905 MHz		35	38.5	-	dB
905 - 915 MHz		12	26	-	dB
980 - 982 MHz		19	44	-	dB
982 - 1005 MHz		23	44	-	dB
1005 - 1025 MHz		30	42	-	dB
1025 - 1035 MHz		35	42.8	-	dB
1035 - 1760 MHz		40	42.8	-	dB
1760 - 2500 MHz		30	38	-	dB
2500 - 3000 MHz		20	33	-	dB
Input/Output Return Loss					
925 - 960 MHz		6	7.2	-	dB
Source Impedance [4]		-	50	-	Ω
Load Impedance [4]		-	50	-	Ω

Notes:

1. All specifications are based on the test circuit shown below
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance shown

Test Circuit:


50 Ω
Single-ended

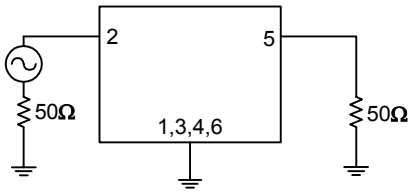


No impedance matching required

Typical Performance (at +25°C)


Frequency Response

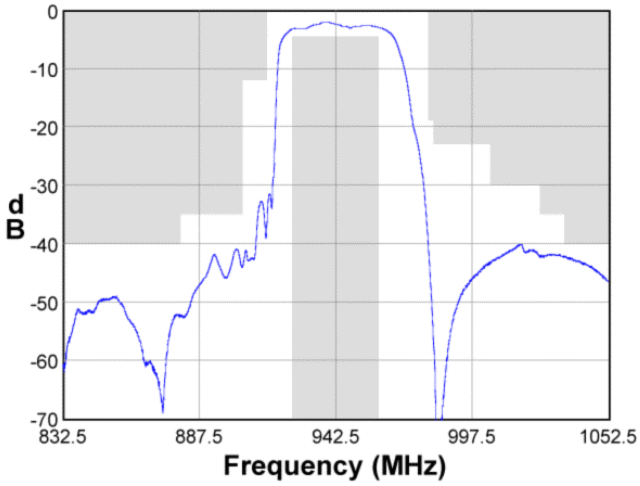


Passband Response

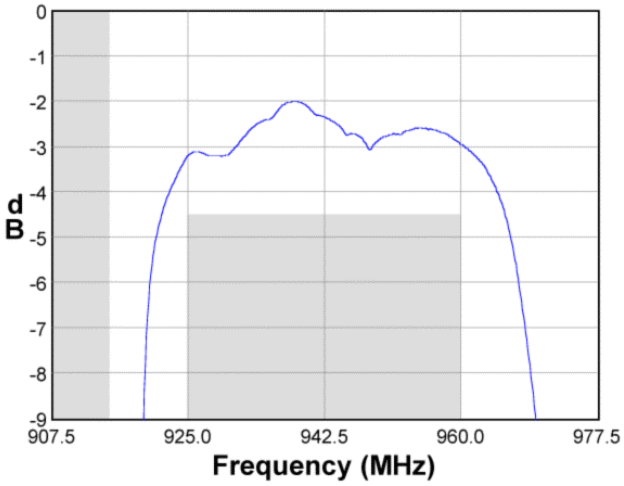


Wideband Response

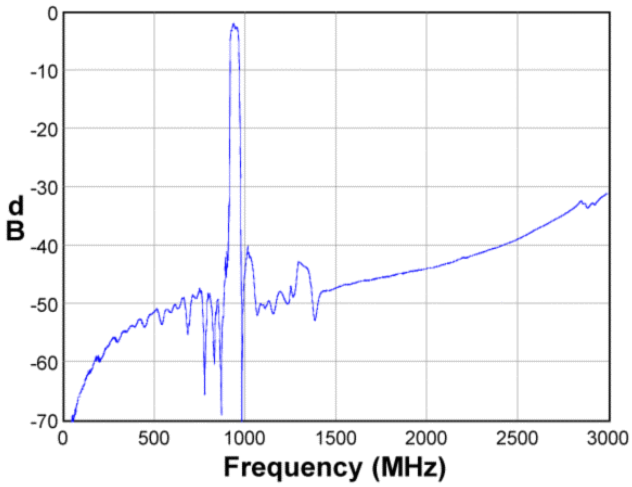


Input/Output Return Loss

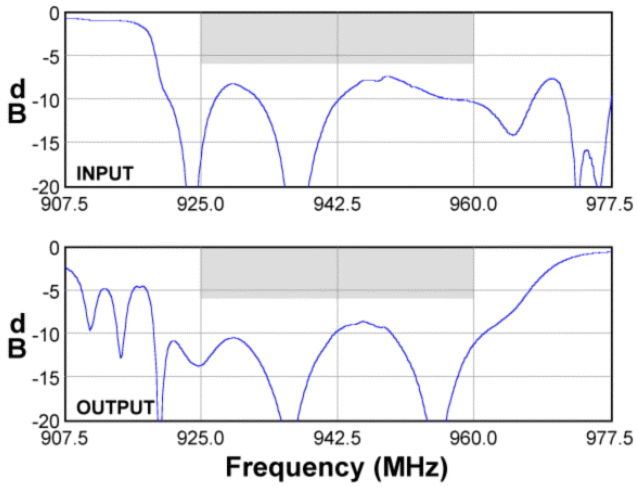

Input Smith Chart

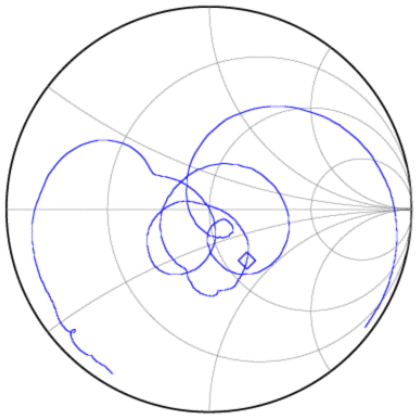

Output Smith Chart

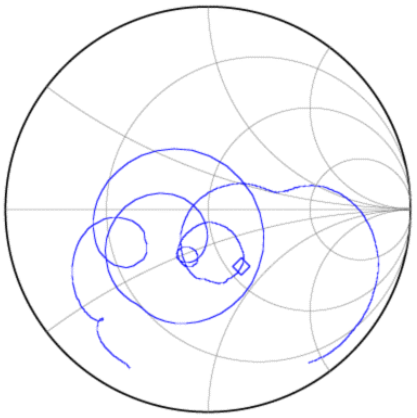


TriQuint SEMICONDUCTOR

Data Sheet

Part Number 855810
942.5 MHz SAW Filter


Matching Schematics

50 Ω
Single-ended

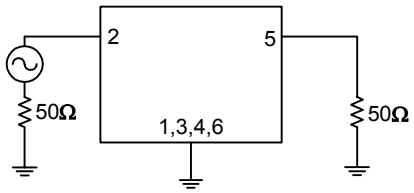


No impedance matching required

Marking

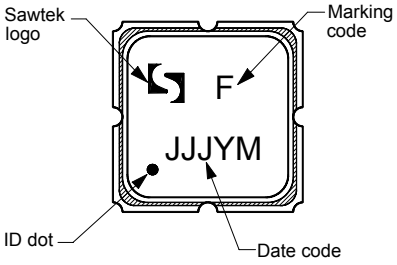


The date code consists of: JJJ = Julian day,
Y = last digit of year, M = manufacturing site code


PCB Footprint

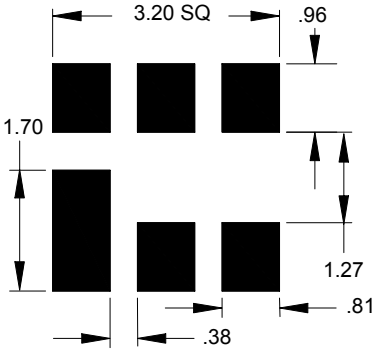

This footprint represents a recommendation only
Dimensions shown are nominal in millimeters

Tape and Reel

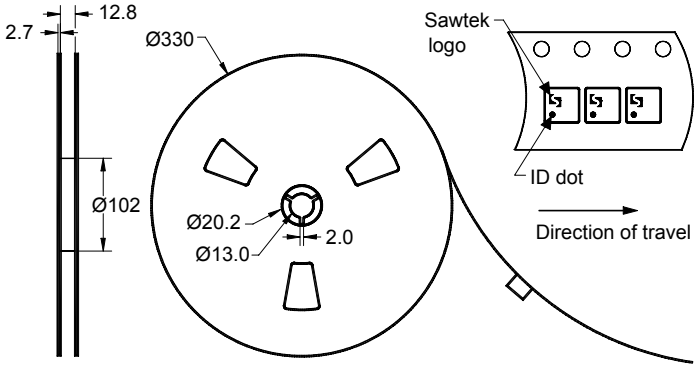

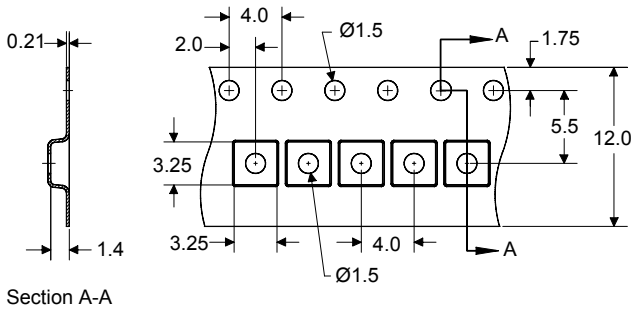

Dimensions shown are nominal in millimeters
Packaging quantity: 5000 units/reel

TriQuint SEMICONDUCTOR

Data Sheet

Part Number 855810
942.5 MHz SAW Filter

Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Unit
Operating Temperature Range	T	-40	+85	°C
Storage Temperature Range	T_{stg}	-40	+85	°C

Important Notes

Warnings

- Electrostatic Sensitive Device (ESD)
- Avoid ultrasonic exposure

RoHS Compliance

- This product complies with EU directive 2002/95/EC (RoHS)

Solderability

- Compatible with JEDEC J-STD-020C **Pb**-free process, **260°C** peak reflow temperature (see soldering profile)

Links to Additional Technical Information

PCB Layout Tips | Qualification Flowchart | Soldering Profile

S-Parameters | RoHS Information | Other Technical Information

TriQuint's liability is limited only to the Surface Acoustic Wave (SAW) component(s) described in this data sheet. TriQuint does not accept any liability for applications, processes, circuits or assemblies, which are implemented using any TriQuint component described in this data sheet.

Contact Information

TriQuint SEMICONDUCTOR
PO Box 609501
Orlando, FL 32860-9501
USA

Phone: +1 (407) 886-8860
Fax: +1 (407) 886-7061
Email: info-product@tqs.com
Web: www.triquint.com

Or contact one of our worldwide Network of sales offices, Representatives or distributors