


- ① MOLDING, MALE- DIALLYL PHTHALATE
PER MIL-M-14, TYPE SDG-F
- ② JACKSCREW- STAINLESS STEEL, QQ-S-764
PASSIVATING DIP.
- ③ JACKSOCKET- STAINLESS STEEL, QQ-S-764
PASSIVATING DIP.
- ④ CONTACT PIN - BRASS, QQ-B-626,
GOLD OVER COPPER.
- ⑤ CLIP SPRING - BERYLLIUM COPPER, QQ-C-533
GOLD PLATED
- ⑥ LOCKWASHER - PHOSPHOR BRONZE, QQ-B-750
CADMIUM PLATE PLUS NATURAL IRIDITE.
- ⑦ NUT-HEX - BRASS, QQ-B-626, CADMIUM
PLATE PLUS NATURAL IRIDITE.

CATALOG NO.	CATALOG NO.	DIMENSIONS		
		A	B	C
SRE 4 PJ	SRE 4 PJ-859	.78	.21	.562
5	5	.70	.21	.482
7	7	.78	.21	.562
9	9	.88	.21	.656
11	11	.78	.28	.531
14	14	.88	.28	.625
20	20	1.06	.28	.814
26	26	1.25	.28	1.000
29	29	1.34	.28	1.094
34	34	1.25	.39	1.032
44	44	1.48	.39	1.267
SRE 50 PJ	SRE 50 PJ-859	1.63	.39	1.408

SRE 34 PJ-859 SHOWN

FACES OF THE "SRE" MOLDINGS

MALE CONTACT NO. 4 THRU 50

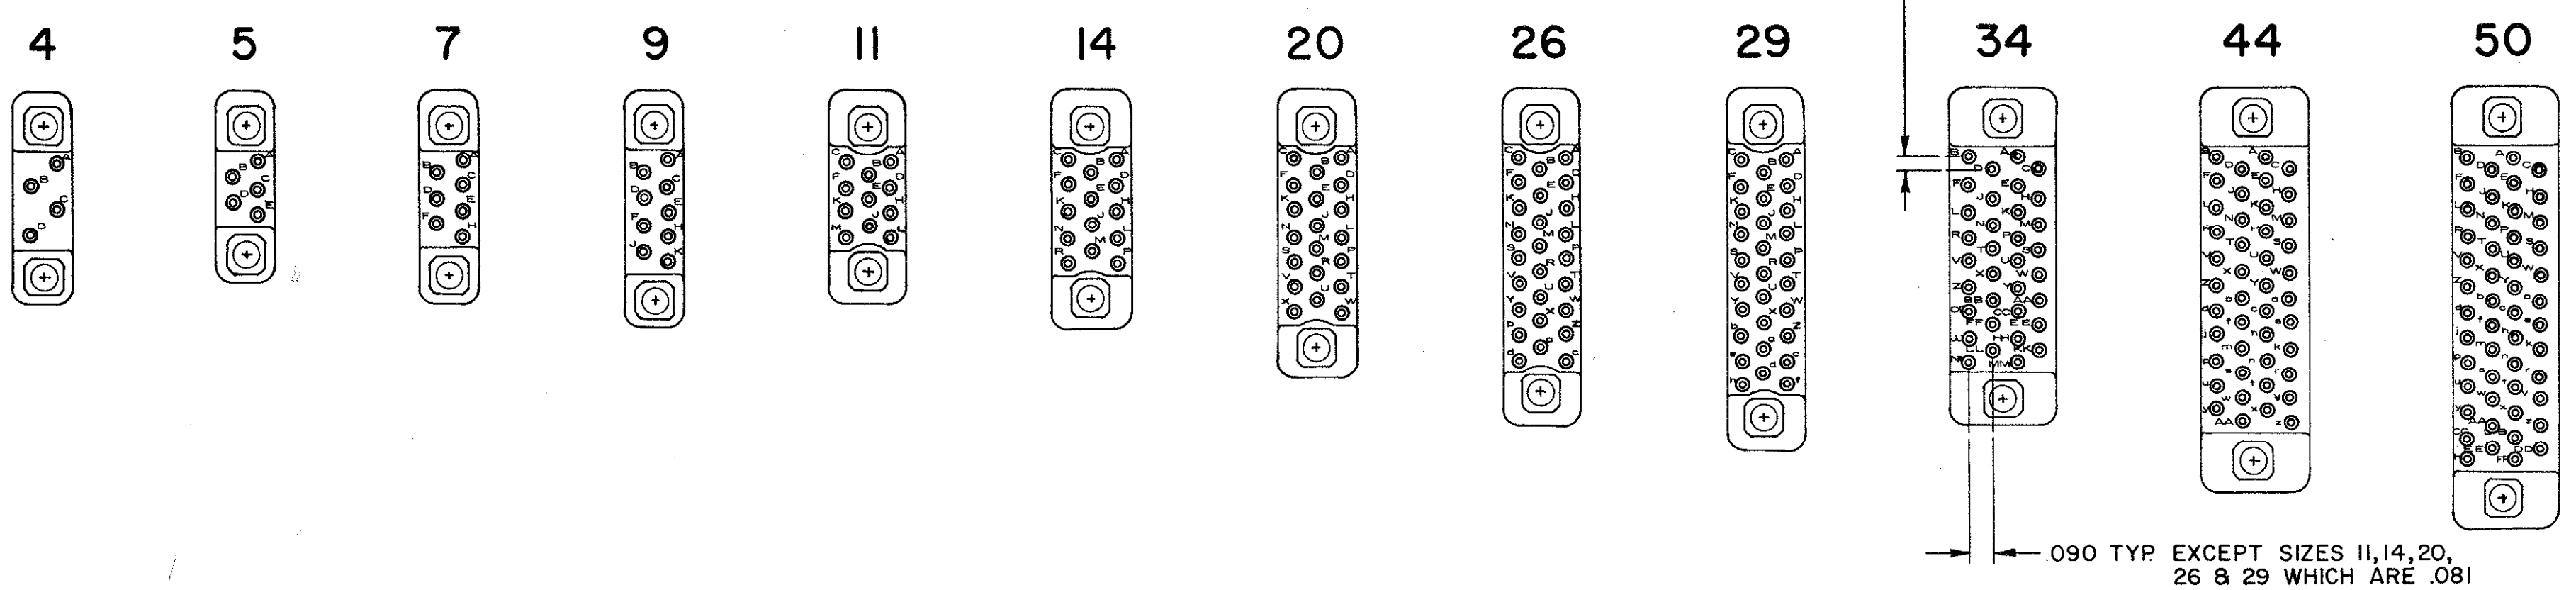

19410 J

REV	CHANGE	DATE
J	REDRAWN & ADDED REVISED. CATALOG NO. SRE ** PJ-859 PER EWR # 760 EN 7/3/60 (E.L.W.)	11-30-71 S.K.

TOLERANCE UNLESS OTHERWISE SPECIFIED .XX = .02 .XXX = .007 ANGULAR = \pm

TITLE COMPOSITE OUTLINE ASSEMBLY SRE ** PJ SRE ** PJ-859			
SCALE 4 X	DR P. FOYTKO DATE 2-15-61	CK'D FINLAYSON DATE 2-17-61	AP'D J.W. BRIDGE DATE 2-20-61
WINCHESTER ELECTRONICS. OAKVILLE, CONN.			
DWG SIZE C	19410		REV J

B + E

SEALING