

RF AMPLIFIER

MODEL CZ8020

Available as: CZ8020, 3 Pin TO-39
TN8020, 4 Pin Surface Mount (SM3)
BX8020, Connectorized Housing (H1)

Features

- Lower Cost
- Operating Temp. 0 °C to +70 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = 0 °C to +70 °C
Frequency	kHz - 400 MHz	kHz - 400 MHz
Gain (dB)	14	13 Min.
Power @ 1 dB Comp. (dBm)	+7.0	+5.0 Min.
Reverse Isolation (dB)	-15	-14 Max.
VSWR In	<1.5:1	2.5:1 Max.
Out	<2.0:1	2.5:1 Max.
Noise Figure (dB)	4.5	6.0 Max.
Power Vdc	+5	+5
mA	25	28 Max.

Note: Care should always be taken to effectively ground the case of each unit.

Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +32 dBm (Typ.)
Second Order Two Tone Intercept Point +26 dBm (Typ.)
Third Order Two Tone Intercept Point +21 dBm (Typ.)


Maximum (No Damage) Ratings

Ambient Operating Temperature -55°C to + 100 °C
Storage Temperature -62°C to + 125 °C
Case Temperature + 125 °C
DC Voltage + 8 Volts
Continuous RF Input Power + 8 dBm
Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
Maximum Peak Power 0.5 Watt (3 µsec Max.)

*Three external capacitors and a decoupling impedance are required. The decoupling impedance must be large in comparison to the 50 Ohm load to minimize gain reduction. The external capacitors determine the low frequency response of the amplifier.

*Decoupling Impedance is 1 kOhm.

Typical Performance Data

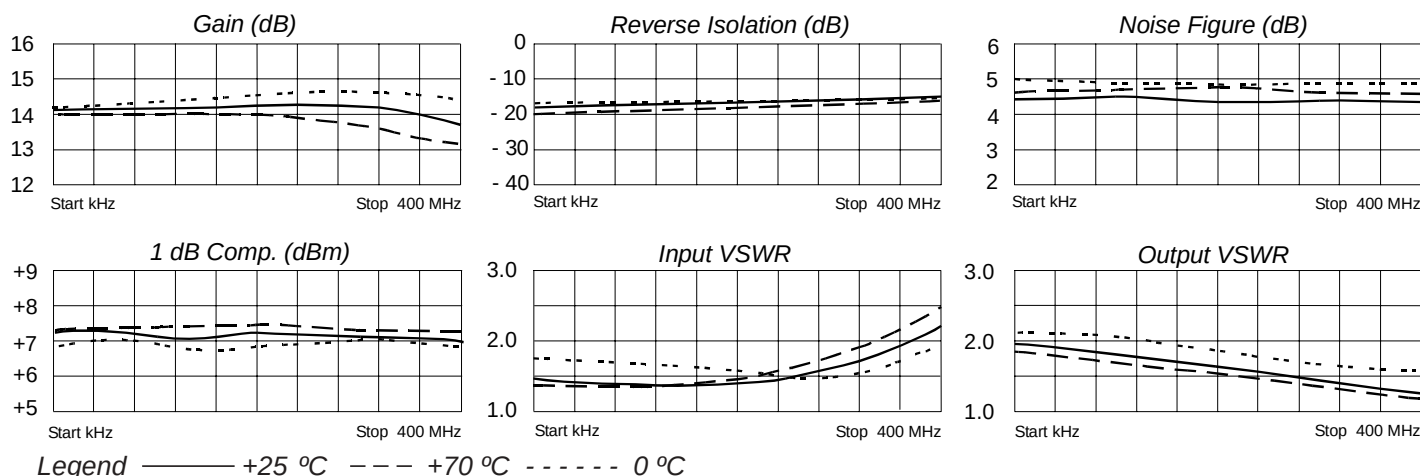

Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 3/30/04

www.SpectrumMicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001