# PJU1N60

## 600V N-Channel Enhancement Mode MOSFET

TO-251


### FEATURES

- 1A, 600V, $R_{DS(ON)}$=11Ω@$V_{GS}$=10V, $I_D$=0.5A
- Low ON Resistance
- Fast Switching
- Low Gate Charge
- Fully Characterized Avalanche Voltage and Current
- Specially Desigened for AC Adapter, Battery Charge and SMPS
- In compliance with EU RoHs 2002/95/EC Directives


### MECHANICAL DATA

- Case: TO-220AB / TO-251 Molded Plastic
- Terminals : Solderable per MIL-STD-750,Method 2026

TO-251




INTERNAL SCHEMATIC DIAGRAM




### ORDERING INFORMATION

| TYPE | MARKING | PACKAGE | PACKING |
|---|---|---|---|
| PJU1N60 | U1N60 | TO-251 | 80PCS/TUBE |

### Maximum RATINGS and Thermal Characteristics ($T_A$=25°C unless otherwise noted )

| PARAMETER | Symbol | PJU1N60 | Units |
|---|---|---|---|
| Drain-Source Voltage | $V_{DS}$ | 600 | V |
| Gate-Source Voltage | $V_{GS}$ | ±30 | V |
| Continuous Drain Current | $I_D$ | 1 | A |
| Pulsed Drain Current [1)] | $I_{DM}$ | 4.6 | A |
| Maximum Power Dissipation $T_A$=25°C<br>Derating Factor | $P_D$ | 28<br>0.22 | W |
| Operating Junction and Storage Temperature Range | $T_J$,$T_{STG}$ | -55 to +150 | °C |
| Avalanche Energy with Single Pulse<br>$I_{AS}$=1.1A, VDD=50V, L=95mH | $E_{AS}$ | 58 | mJ |
| Junction-to-Case Thermal Resistance | $R_{\theta JC}$ | 4.5 | °C/W |
| Junction-to Ambient Thermal Resistance | $R_{\theta JA}$ | 100 | °C/W |

**Note :** 1. Maximum DC current limited by the package

**PAN JIT RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN,FUNCTIONS AND RELIABILITY WITHOUT NOTICE**

# PJU1N60

**ELECTRICAL CHARACTERISTICS** ( $T_A$=25°C unless otherwise noted )

| Parameter | Symbol | Test Condition | Min. | Typ. | Max. | Units |
|---|---|---|---|---|---|---|
| **Static** | | | | | | |
| Drain-Source Breakdown Voltage | $BV_{DSS}$ | $V_{GS}$=0V, $I_D$=250uA | 600 | - | - | V |
| Gate Threshold Voltage | $V_{GS(th)}$ | $V_{DS}$=$V_{GS}$, $I_D$=250uA | 2.0 | - | 4.0 | V |
| Drain-Source On-State Resistance | $R_{DS(on)}$ | $V_{GS}$= 10V, $I_D$= 0.5A | - | 8.3 | 11 | Ω |
| Zero Gate Voltage Drain Current | $I_{DSS}$ | $V_{DS}$=600V, $V_{GS}$=0V | - | - | 10 | uA |
| Gate Body Leakage | $I_{GSS}$ | $V_{GS}$=±30V, $V_{DS}$=0V | - | - | ±100 | nA |
| **Dynamic** | | | | | | |
| Total Gate Charge | $Q_g$ | $V_{DS}$=480V, $I_D$=1.0A $V_{GS}$=10V | - | 6.2 | 7.8 | nC |
| Gate-Source Charge | $Q_{gs}$ | | - | 1.44 | - | |
| Gate-Drain Charge | $Q_{gd}$ | | - | 3.32 | - | |
| Turn-On Delay Time | $t_{d(on)}$ | $V_{DD}$=300V, $I_D$=1.0A $R_G$=25Ω, $V_{GS}$=10V | - | 10.2 | 14.8 | ns |
| Turn-On Rise Time | $t_r$ | | - | 5.6 | 8.0 | |
| Turn-Off Delay Time | $t_{d(off)}$ | | - | 16 | 22 | |
| Turn-Off Fall Time | $t_f$ | | - | 10.2 | 16 | |
| Input Capacitance | $C_{iss}$ | $V_{DS}$=25V, $V_{GS}$=0V f=1.0MHz | - | 165 | 220 | pF |
| Output Capacitance | $C_{oss}$ | | - | 17 | 28 | |
| Reverse Transfer Capacitance | $C_{rss}$ | | - | 1.65 | 4.2 | |
| **Source-Drain Diode** | | | | | | |
| Max. Diode Forward Current | $I_S$ | - | - | - | 1.0 | A |
| Max.Pulsed Source Current | $I_{SM}$ | - | - | - | 4.6 | A |
| Diode Forward Voltage | $V_{SD}$ | $I_S$=1A , $V_{GS}$=0V | - | - | 1.5 | V |
| Reverse Recovery Time | $t_{rr}$ | $V_{GS}$=0V, $I_F$=1A di/dt=100A/us | - | 190 | - | ns |
| Reverse Recovery Charge | $Q_{rr}$ | | - | 0.5 | - | uC |

**NOTE :** Plus Test: Pluse Width ≤ 300us, Duty Cycle ≤ 2%.

# PJU1N60

## Typical Characteristics Curves ( Ta=25℃, unless otherwise noted)

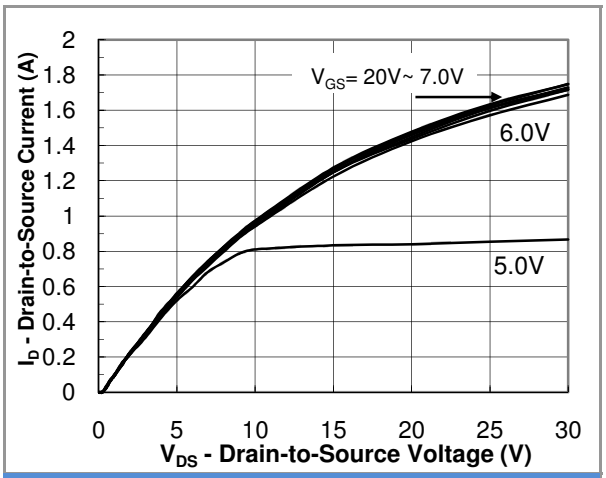



Fig.1 Output Characteristic

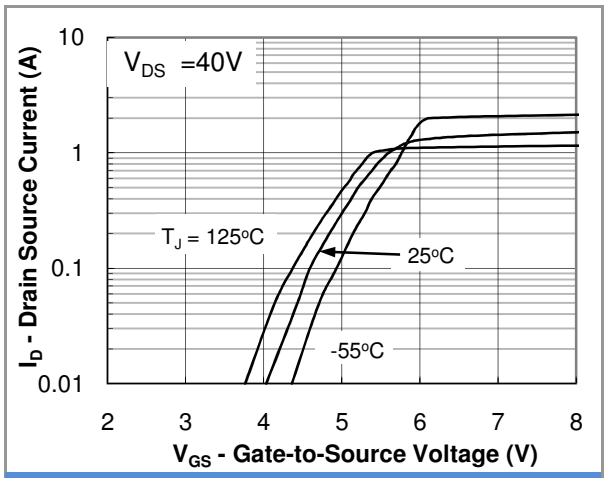



Fig.2 Transfer Characteristic

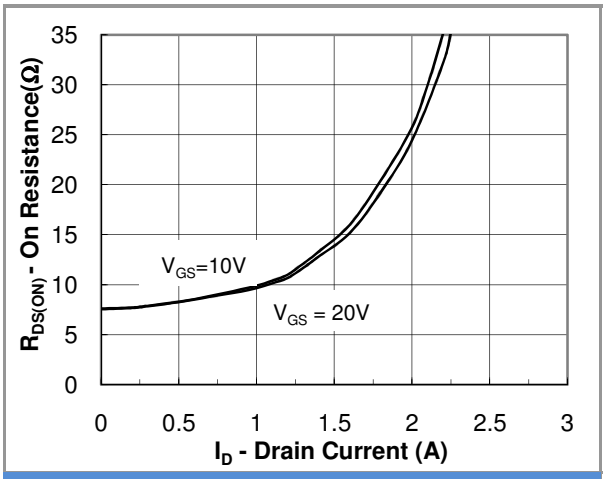



Fig.3 On Resistance vs Drain Current

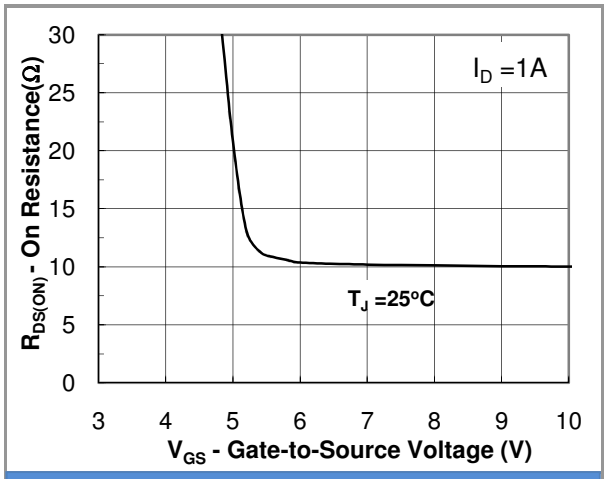



Fig.4 On Resistance vs Gate to Source Voltage

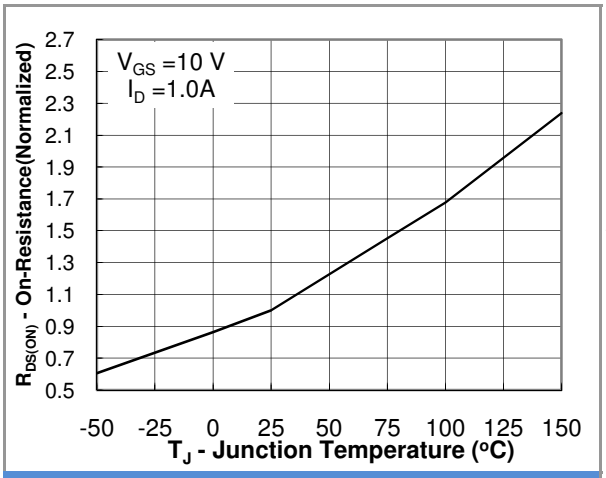



Fig.5 On Resistance vs Junction Temperature

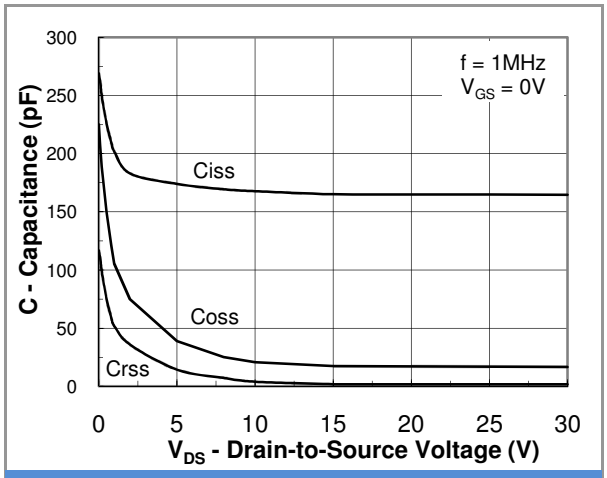



Fig.6 Capacitance

# PJU1N60

**Typical Characteristics Curves ( Ta=25℃, unless otherwise**

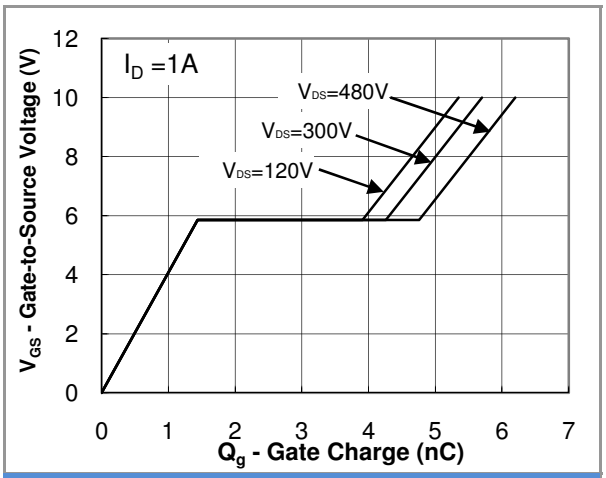



Fig. 7 Gate Charge Waveform

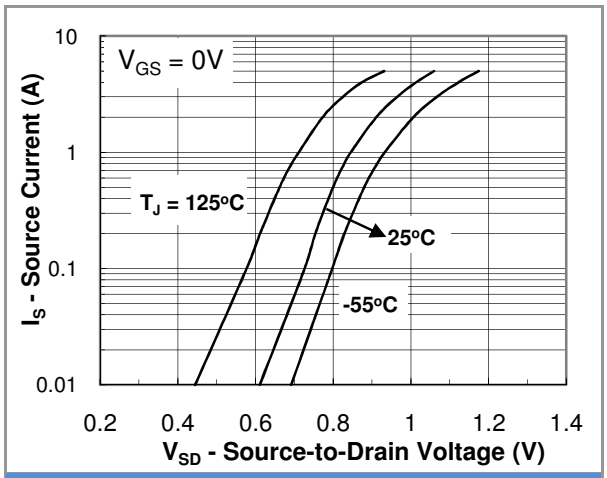



Fig.8 Source-Drain Diode Forward Voltage

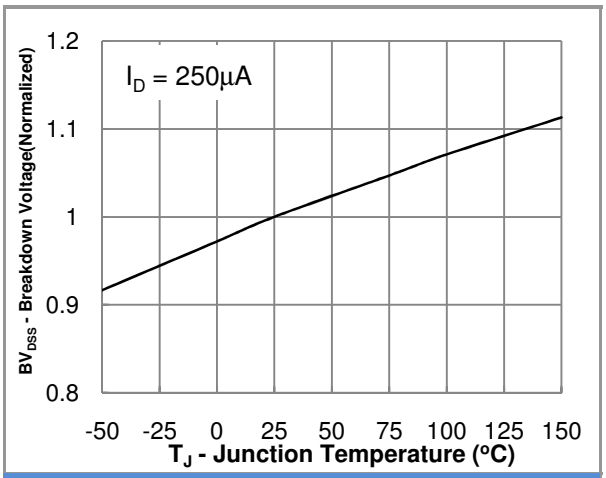



Fig.9 Breakdown Voltage vs Junction Temperature

# PJU1N60

## LEGAL STATEMENT

**Copyright PanJit International, Inc 2010**

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.