

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE:±0,05)



NOTES:
MATERIAL
1. Insulator Material: PBT +30%GF(UL94V-0), Grey
2. Contact Material : Brass
3. Contact Plating : Gold flash/Tin Over Ni
④ AWHW xxA-0102-T: 30u" Au/Tin Over Ni
AWHW xxA-0202-T: Gold flash/Tin Over Ni

ELECTRICAL

1. Current Rating : 3AMP
 2. Withstand Voltage : 500V AC/Minute
 3. Contact Resistance : 20mΩ max
 4. Insulation Resistance: 1000MΩ min
- ENVIRONMENTAL**
1. Operation Temperature: -40°C to +105°C
2. Packing : Tray packing

Order information:
xx : 06,08,10,12,14,16,18,20,24
26,30,34,40,50,60,64

Dimension antitheses list	
NO. Pin	L
6P-8P	4,00
10P-64P	4,40

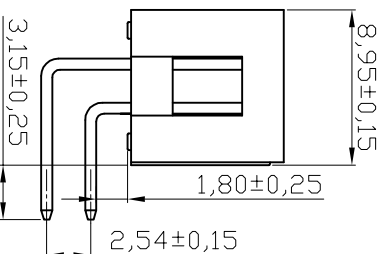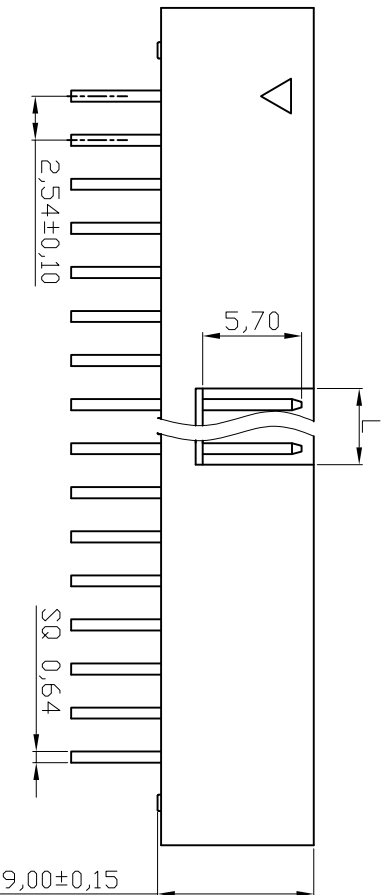

RoHS compliant
Unit: mm



Scale	Free						
TOLERANCE							
X.X	±0,40						
X.XX	±0,25	④	Add 30u" Au version	12.12.2013	Winnie	Drawn	25.01.2006
X.XXX	±0,15	③	Add UL file no.	12.12.2013	Amy	Approved	12.12.2013
DIM	TOL	②	Update	29.06.2009	Dean		
Angle	±3°	①	Drawn	25.01.2006	Alex		
			Id.			Modification	



Customer-No.	Name	Date	Name
	Alex	25.01.2006	Alex
	Winnie	12.12.2013	Winnie

ASSMANN WSW-No. AWHW xxA-0202-T
④ AWHW xxA-0102-T

Drawing-No. ASS 2315 CO rev04
Replace Sheet

1	2	3	4	5	6	7	SV/xxx
H	G	F	E	D	C	B	A