THYRISTOR MODULE

PK(PD,PE)55FG


UL;E76102(M)

Power Thyristor/Diode Module **PK55FG** series are designed for various rectifier circuits and power controls. For your circuit application, following internal connections and wide voltage ratings up to 1600V are available. and electrically isolated mounting base make your mechanical design easy.


- $I_{T(AV)}$ 55A, $I_{T(RMS)}$ 86A, I_{TSM} 1300A
- di/dt 100A/μs
- dv/dt 1000V/μs

(**Applications**)
Various rectifiers
AC/DC motor drives
Heater controls
Light dimmers
Static switches


Internal Configurations




PK



PE



PD

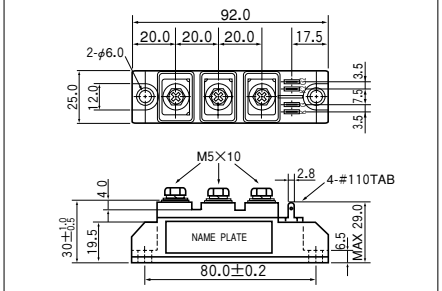

Unit : mm

■Maximum Ratings

(Tj=25℃ unless otherwise specified)

Symbol	Item	Ratings				Unit
		PK55FG40 PD55FG40 PE55FG40	PK55FG80 PD55FG80 PE55FG80	PK55FG120 PD55FG120 PE55FG120	PK55FG160 PD55FG160 PE55FG160	
V_{RRM}	＊Repetitive Peak Reverse Voltage	400	800	1200	1600	V
V_{RSM}	＊Non-Repetitive Peak Reverse Voltage	480	960	1300	1700	V
V_{DRM}	＊Repetitive Peak off-state Voltage	400	800	1200	1600	V

Symbol	Item		Conditions	Ratings	Unit
$I_{T(AV)}$	＊Average On-state Current		Single phase, half wave, 180° conduction, Tc=81℃	55	A
$I_{T(RMS)}$	＊R.M.S. On-state Current		Single phase, half wave, 180° conduction, Tc=81℃	86	A
I_{TSM}	＊Surge On-state Current		½ Cycle, 50/60Hz, Peak Value, non-repetitive	1190/1300	A
I^2t	＊I^2t		Value for one cycle surge current	7040	A^2S
P_{GM}	Peak Gate Power Dissipation			10	W
$P_{G(AV)}$	Average Gate Power Dissipation			1	W
I_{FGM}	Peak Gate Current			3	A
V_{FGM}	Peak Gate Voltage (Forward)			10	V
V_{RGM}	Peak Gate Voltage (Reverse)			5	V
di/dt	Critical Rate of Rise of On-state Current		I_G=100mA, V_D=½V_{DRM}, di_G/dt=0.1A/μs	100	A/μs
V_{ISO}	＊Isolation Breakdown Voltage (R.M.S)		A.C. 1minute	2500	V
Tj	＊Operating Junction Temperature			−40 to +125	℃
Tstg	＊Storage Temperature			−40 to +125	℃
	Mounting Torque	Mounting (M5)	Recommended Value 1.5-2.5 (15-25)	2.7 (28)	N·m (kgf·cm)
		Terminal (M5)	Recommended Value 1.5-2.5 (15-25)	2.7 (28)	
	Mass		Typical Value	170	g


■Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
I_{DRM}	Repetitive Peak off-state Current,max	Tj=125℃, V_D=V_{DRM}	15	mA
I_{RRM}	＊Repetitive Peak Reverse Current,max	Tj=125℃, V_D=V_{DRM}	15	mA
V_{TM}	＊On-state Voltage,max	I_T=165A	1.6	V
I_{GT}	Gate Trigger Current,max	V_D=6V, I_T=1A	50	mA
V_{GT}	Gate Trigger Voltage,max	V_D=6V, I_T=1A	3	V
V_{GD}	Gate Trigger Voltage,min	Tj=125℃, V_D=½V_{DRM}	0.25	V
dv/dt	Critical Rate of Rise of off-state Voltage,min	Tj=125℃, V_D=⅔V_{DRM}	1000	V/μs
Rth(j-c)	＊Thermal Impedance,max	Junction to case	0.5	℃/W


＊mark : Thyristor and Diode part. No mark : Thyristor part

SanRex 50 Seaview Blvd. Port Washington, NY 11050-4618 PH.(516)625-1313 FAX(516)625-8845 E-mail: semi@sanrex.com


Gate Characteristics

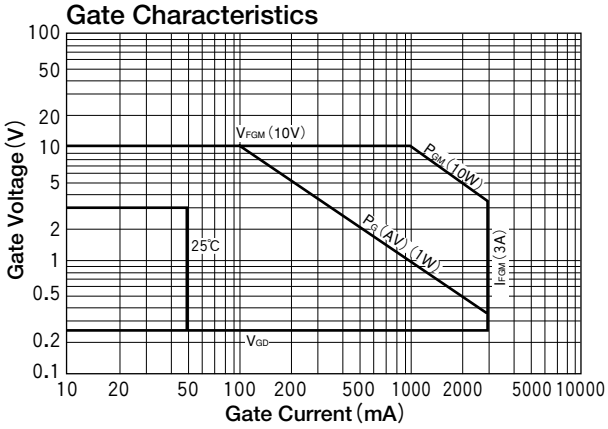

On-State Voltage max

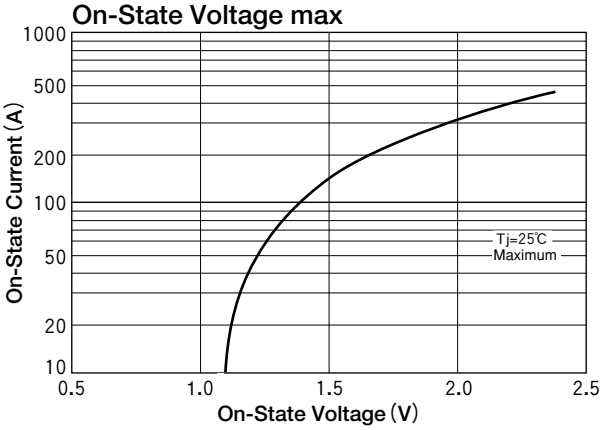

Surge On-State Current Rating (Non-Repetitive)

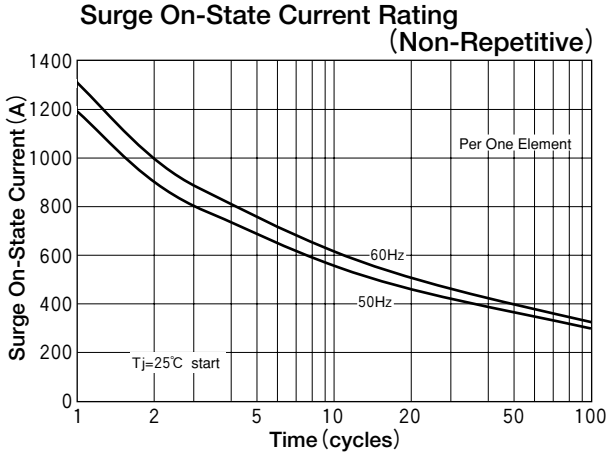

Transient Thermal Impedance

