


HOLE PATTERN:  
Space requirement 12x12 pitch

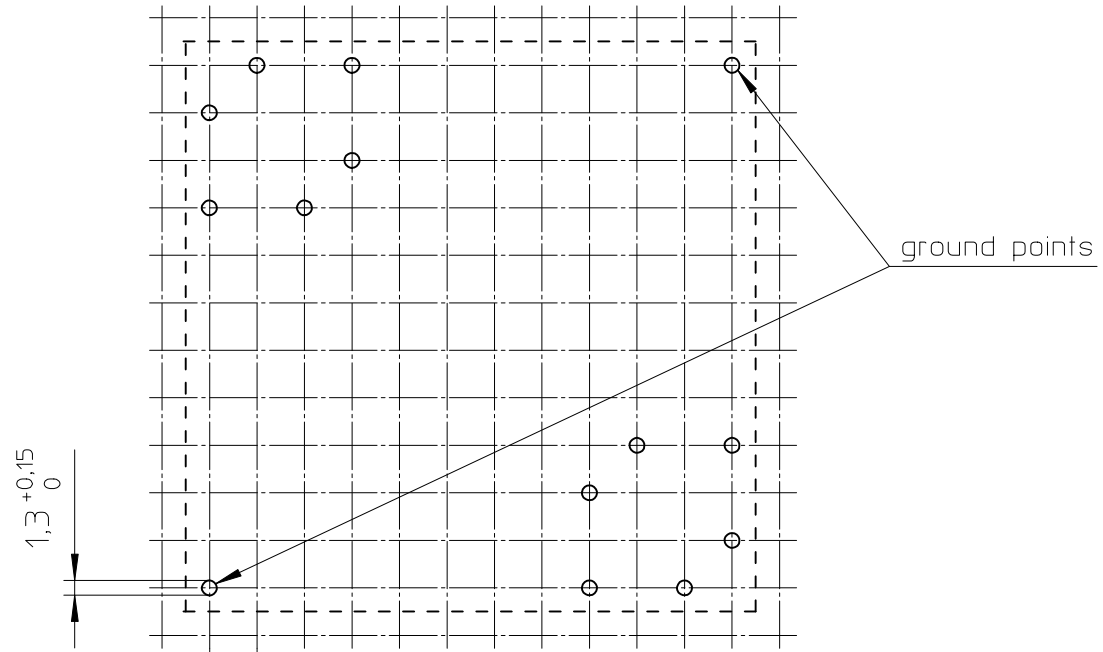

Coil former material: Sumikon PM9630 (PF), glass-reinforced.  
 UL file number: E41429 - UL94V-0.  
 Pin material: CP wire - Ni flash, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 430°C - 2s.  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s.  
 Min. winding area: 72 mm<sup>2</sup>.  
 Mean length of turn: 61 mm.

CLASS.NO.	CSV-RM12-1S-12P-TZ		4322 021 06621	07-01-22
NAME NAAM	A.Wojtasz	SUPERS. VERV.	1 SH SH BL BL	112 - 001
MPA	CHECK CONTR.	DAT.	07-01-22	Property of Eigendom van
				© FERROXCUBE 2007
			010	A3