

SHEET OF




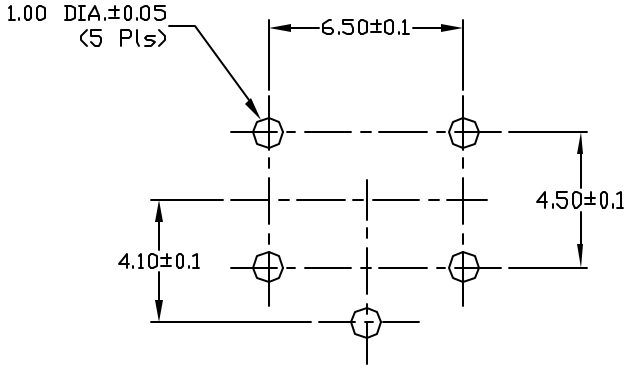



RECOMMEND P.C.B. LAYOUT

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0=±0.4
   0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 50mA, @12V DC
5. TRAVEL: 0.25±0.1mm
▲6. OPERATING FORCE: 250±50gf
7. CONTACT RESISTANCE: 100m ohms max.
8. ELECTRICAL LIFE: 100,000 CYCLES MIN.
8. INSULATION RESISTANCE: 100M ohms min.
10. DIELECTRIC STRENGTH: 250V RMS MIN.
11. OPERATING TEMP.: −30°C to −85°C
▲12. DESIGNATE MAJOR DIMENSIONS.

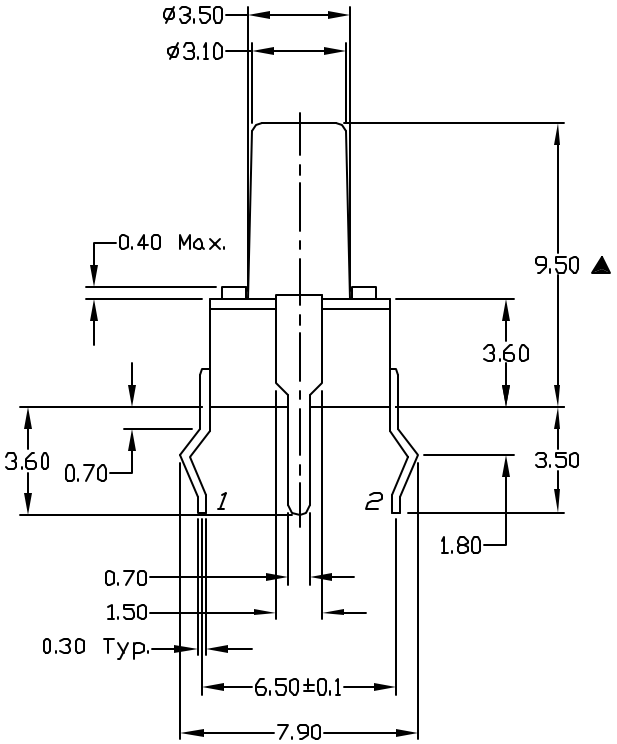

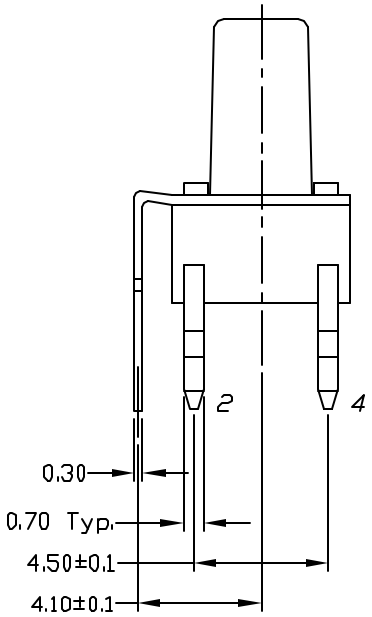



CIRCUIT: SPST

CONTACT CONFIGURATION

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	10037	RELEASED FOR PRODUCTION		

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: TLE 1105 B F250 Q

SCALE	DATE	DR	DWG	REV
4:1	12/1/98	MM	P010033	A