Pb Free Plating Product

APT60DQ60BCT/APT60DQ60BCTG

2*60A/600V Heatsink Dual Cathode Common Ultra Fast Recovery Rectifiers


APPLICATION

- Freewheeling, Snubber, Clamp
- Inversion Welder
- PFC
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Converter & Chopper
- UPS

PRODUCT FEATURE

- Ultrafast Recovery Time
- Soft Recovery Characteristics
- Low Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Leakage Current

TO-3PN/TO-3PB-SQ

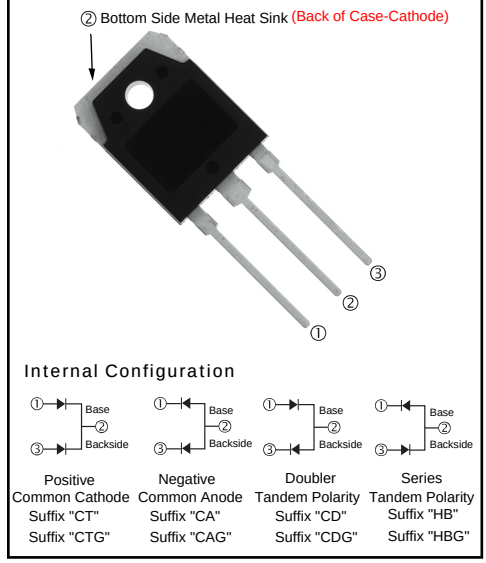

GENERAL DESCRIPTION

APT60DQ60BCT/APT60DQ60BCTG using the lastest FRED FAB process(planar passivation pellet) with ultrafast and soft recovery characteristics.

MAXIMUM RATINGS

All Ratings Per Leg: T_C = 25°C unless otherwise specified.

Symbol	Characteristic / Test Conditions	APT60DQ60BCT/APT60DQ60BCTG	UNIT
V_R	Maximum D.C. Reverse Voltage	600	Volts
V_{RRM}	Maximum Peak Repetitive Reverse Voltage		
V_{RWM}	Maximum Working Peak Reverse Voltage		
$I_{F(AV)}$	Maximum Average Forward Current (T_C = 110°C, Duty Cycle = 0.5)	60	Amps
$I_{F(RMS)}$	RMS Forward Current (Square wave, 50% duty)	94	
I_{FSM}	Non-Repetitive Forward Surge Current (T_J = 45°C, 8.3ms)	600	
E_{AVL}	Avalanche Energy (1A, 40mH)	20	mJ
T_J,T_{STG}	Operating and StorageTemperature Range	-55 to 175	°C
T_L	Lead Temperature for 10 Sec.	300	

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions		MIN	TYP	MAX	UNIT
V_F	Forward Voltage	I_F = 60A		2.0	2.4	Volts
		I_F = 120A		2.44		
		I_F = 60A, T_J = 125°C		1.7		
I_{RM}	Maximum Reverse Leakage Current	V_R = 600V			25	μA
		V_R = 600V, T_J = 125°C			500	
C_T	Junction Capacitance, V_R = 200V			75		pF

© 1995 Thinki Semiconductor Co., Ltd. Download from alldatasheet.com

DYNAMIC CHARACTERISTICS

Symbol	Characteristic	Test Conditions	MIN	TYP	MAX	UNIT
t_{rr}	Reverse Recovery Time	I_F = 1A, di_F/dt = -100A/µs, V_R = 30V, T_J = 25°C	-	26		ns
t_{rr}	Reverse Recovery Time	I_F = 60A, di_F/dt = -200A/µs V_R = 400V, T_C = 25°C	-	35		ns
Q_{rr}	Reverse Recovery Charge		-	45		nC
I_{RRM}	Maximum Reverse Recovery Current		-	4	-	Amps
t_{rr}	Reverse Recovery Time	I_F = 60A, di_F/dt = -200A/µs V_R = 400V, T_C = 125°C	-	175		ns
Q_{rr}	Reverse Recovery Charge		-	680		nC
I_{RRM}	Maximum Reverse Recovery Current		-	8	-	Amps
t_{rr}	Reverse Recovery Time	I_F = 60A, di_F/dt = -1000A/µs V_R = 400V, T_C = 125°C	-	100		ns
Q_{rr}	Reverse Recovery Charge		-	1380		nC
I_{RRM}	Maximum Reverse Recovery Current		-	26		Amps

THERMAL AND MECHANICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction-to-Case Thermal Resistance			.44	°C/W
W_T	Package Weight		0.22		oz
			5.9		g
Torque	Maximum Mounting Torque			10	lb•in
				1.1	N•m

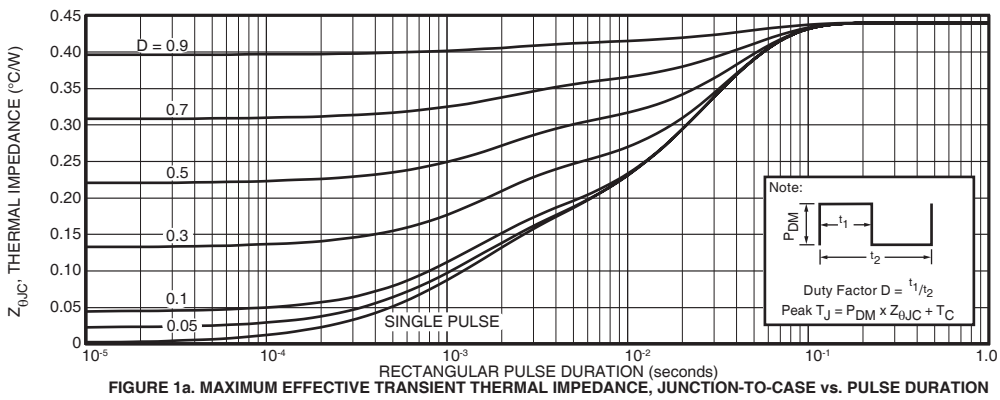


FIGURE 1a. MAXIMUM EFFECTIVE TRANSIENT THERMAL IMPEDANCE, JUNCTION-TO-CASE vs. PULSE DURATION

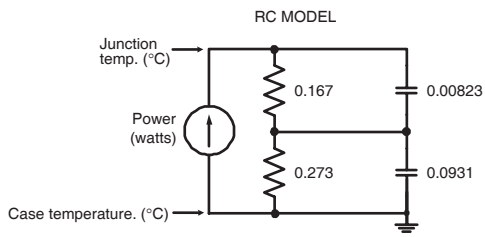


FIGURE 1b, TRANSIENT THERMAL IMPEDANCE MODEL

© 1995 Thinki Semiconductor Co., Ltd. Download from alldatasheet.com

TYPICAL PERFORMANCE CURVES

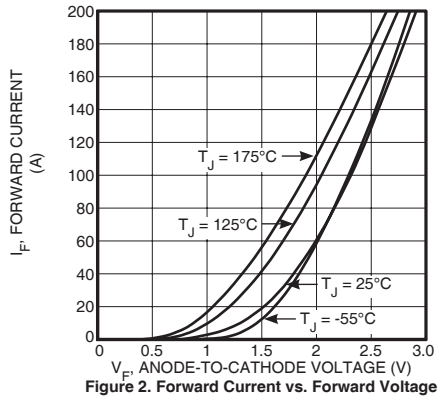


Figure 2. Forward Current vs. Forward Voltage

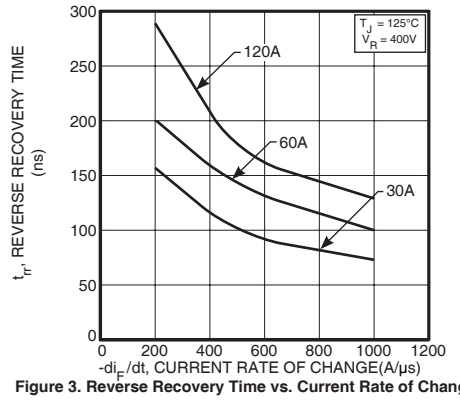


Figure 3. Reverse Recovery Time vs. Current Rate of Change

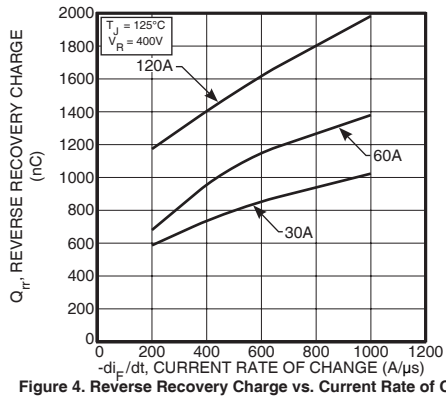


Figure 4. Reverse Recovery Charge vs. Current Rate of Change

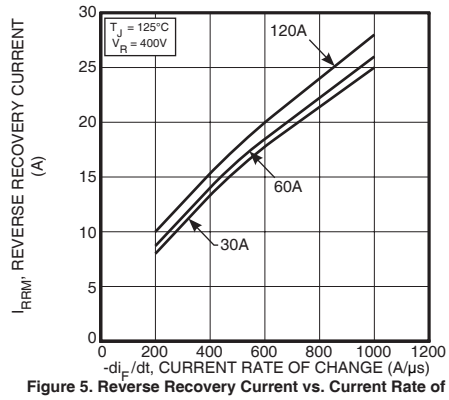


Figure 5. Reverse Recovery Current vs. Current Rate of Change

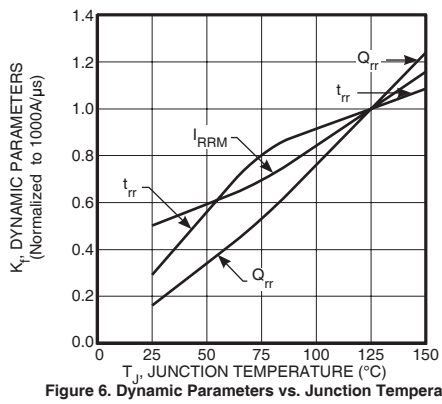


Figure 6. Dynamic Parameters vs. Junction Temperature

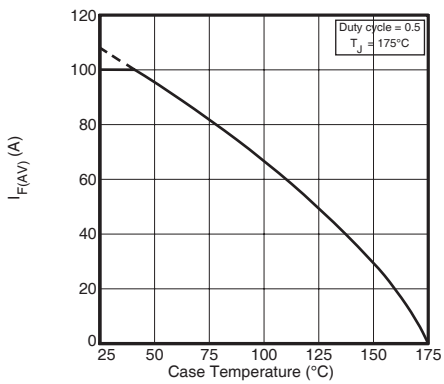


Figure 7. Maximum Average Forward Current vs. CaseTemperature

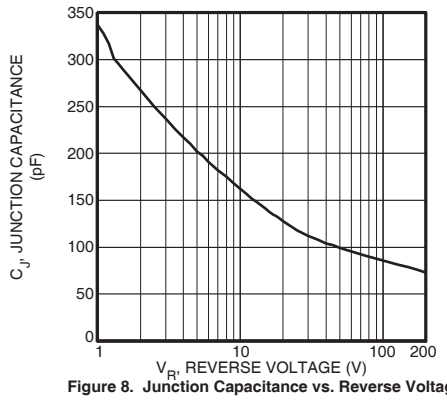


Figure 8. Junction Capacitance vs. Reverse Voltage

© 1995 Thinki Semiconductor Co., Ltd. Download from alldatasheet.com

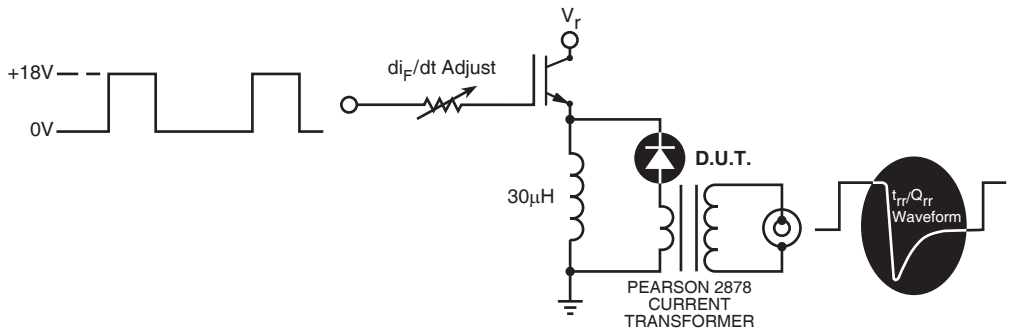


Figure 9. Diode Test Circuit

1. I_F - Forward Conduction Current
2. di_F/dt - Rate of Diode Current Change Through Zero Crossing.
3. I_{RRM} - Maximum Reverse Recovery Current.
4. t_{rr} - Reverse Recovery Time, measured from zero crossing where diode current goes from positive to negative, to the point at which the straight line through I_{RRM} and $0.25 \bullet I_{RRM}$ passes through zero.
5. Q_{rr} - Area Under the Curve Defined by I_{RRM} and t_{rr}.
6. di_M/dt - Maximum Rate of Current Increase During the Trailing Portion of t_{rr}.


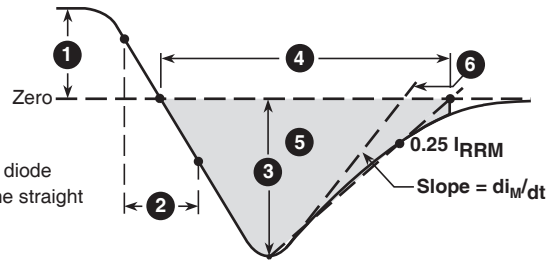


Figure 10, Diode Reverse Recovery Waveform and Definitions

© 1995 Thinki Semiconductor Co., Ltd. Download from alldatasheet.com

Package Outline

THINKI TO-3PN/TO-3PB-SQ

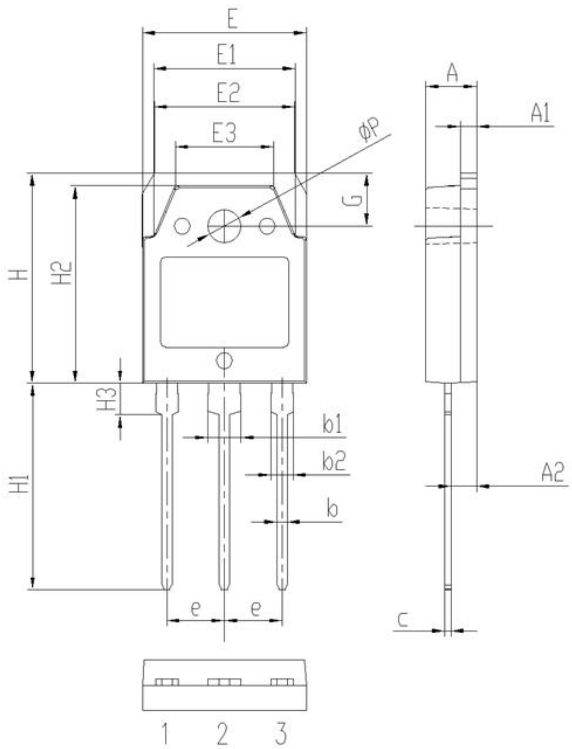

Symbol	Dimensions(millimeters)	
	Min.	Max.
A	4.60	5.00
A1	1.50	2.00
A2	2.20	2.60
b	0.80	1.20
b1	2.90	3.30
b2	1.90	2.30
c	0.40	0.80
e	5.25	5.65
E	15.3	15.7
E1	13.2	13.6
E2	13.1	13.5
E3	9.10	9.50
H	19.7	20.1
H1	19.1	20.1
H2	18.3	18.7
H3	2.80	3.20
G	4.80	5.20
ΦP	3.00	3.40

© 1995 Thinki Semiconductor Co., Ltd. Download from alldatasheet.com