

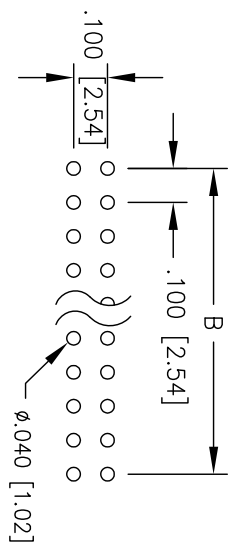
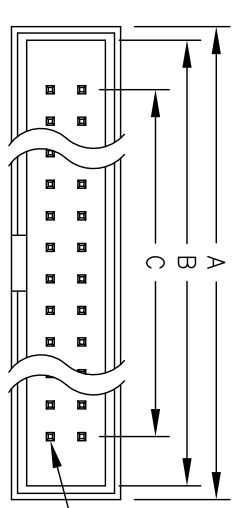


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/27/10	

APPROVED: _____
 DATE: _____ TITLE: _____

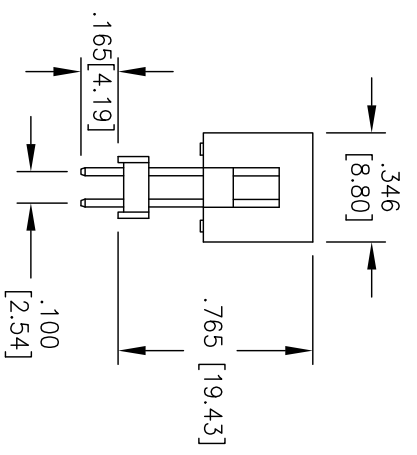

RECOMMENDED PCB LAYOUT

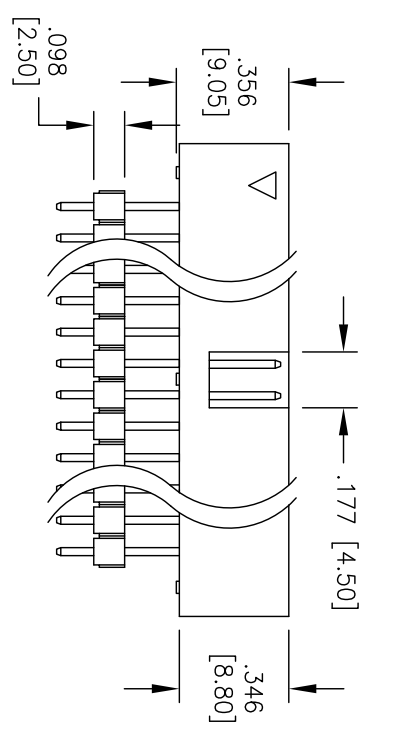

A = .100 [2.54] X No. of Positions /2 + .300 [7.62]
 B = .100 [2.54] X No. of Positions /2 + .212 [5.40]
 C = .100 [2.54] X No. of Spaces

SPECIFICATION:

- Material:** Insulator: PBT, glass reinforced, rated UL-94V-0
 Insulator Color: Black
- Contacts:** Brass
- Contact Plating:** 10u" Gold flash over nickel underplate on contact area, Tin over Copper underplate on tails.
- Electrical:** Operating Voltage: 250V AC max.
 Current rating: 3 Amps max.
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min
 Dielectric withstanding voltage: 500 VAC / minute
- Mechanical:** Mating durability: 750 cycles min.
 Temperature Rating: Operating temperature: -40° TO +105°
 Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: BOX HEADER, RIGHT ANGLE PCB MOUNT,
 2 ROW .100 PITCH, TIN PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN AY	7/27/10
CHECKED AH	7/27/10
APPROVED	

SIZE	PART NO.	REV.
X	BHRE-XX-VSG-165/765-10	-
REF.	SCALE: NIS	SHEET 1 OF 1