

**Super Fast Glass Passivated Rectifiers****Reverse Voltage - 50 to 600 Volts****Forward Current - 3.0 Amperes****Features**

- Fast switching for high efficiency
- Low cost
- Low reverse leakage current
- High current capability
- Low forward voltage drop
- Meet UL flammability classification 94V-0


Mechanical Data

- Case: JEDEC DO-27 Molded plastic
- Polarity: Color band denotes cathode
- Mounting position: Any

Note: Products with logo  or  are made by HY Electronic (Cayman) Limited.

Applications

- For use in SMPS, high frequency inverters, PWM and polarity protection applications

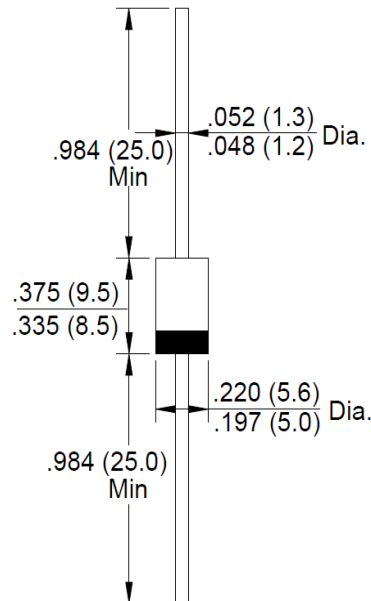DO-27

Package Outline Dimensions in Inches (Millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristics	Symbol	SF31G	SF32G	SF33G	SF34G	SF35G	SF36G	SF38G	Unit
Maximum Repetitive Peak Reverse Voltage	VRRM	50	100	150	200	300	400	600	V
Maximum RMS Voltage	VRMS	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	VDC	50	100	150	200	300	400	600	V
Maximum Average Forward Rectified Current @TA=55℃	I(AV)	3.0							A
Peak Forward Surge Current, 8.3mS Single Half Sine-Wave, Superimposed on Rated Load (JEDEC Method)	IFSM	125							A
Peak Forward Voltage at 3.0A DC (Note1)	VF	0.95				1.3		1.7	V
Maximum DC Reverse Current @TJ=25℃ at Rated DC Blocking Voltage @TJ=100℃	IR	5.0 100							μA
Maximum Reverse Recovery Time (Note 2)	Trr	35							nS
Typical Junction Capacitance (Note3)	CJ	70				45			pF
Typical Thermal Resistance Junction to Ambient	RθJA	20							℃/W
Operating Junction Temperature Range	TJ	-55 to +150							℃
Storage Temperature Range	TSTG	-55 to +150							℃

Notes: 1. 300uS pulse width, 2%duty cycle.

2. Measured with I_F=0.5A, I_R=1A, I_{RR}=0.25A .

3. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.

4. The typical data above is for reference only

SF3*G-A-00-00

Rev. 11, 18-May-2020



Fig. 1 - Forward Current Derating Curve

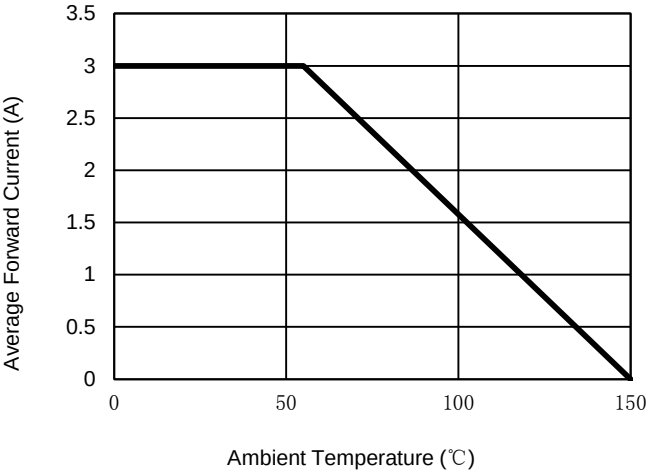


Fig. 2 - Maximum Non-Repetitive Surge Current

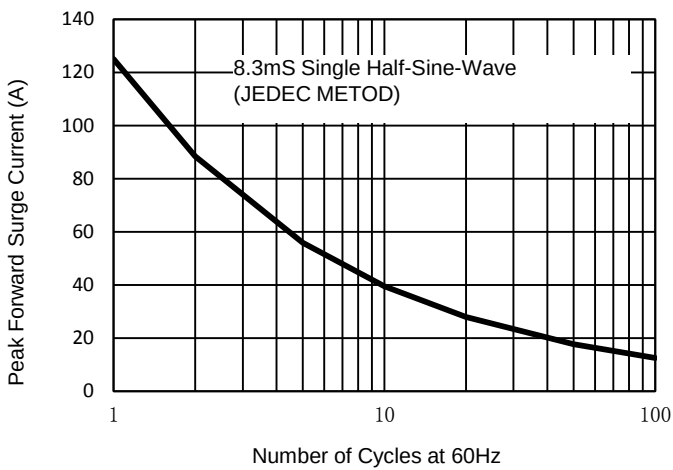


Fig. 3 - Typical Junction Capacitance

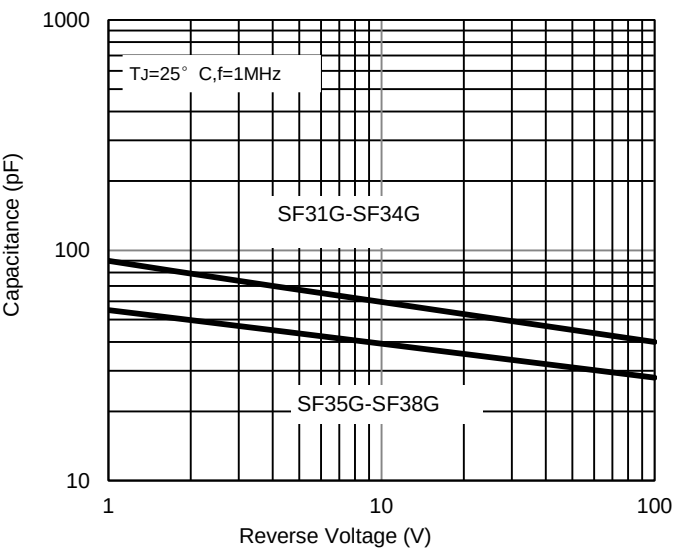


Fig. 4 - Typical Forward Characteristics

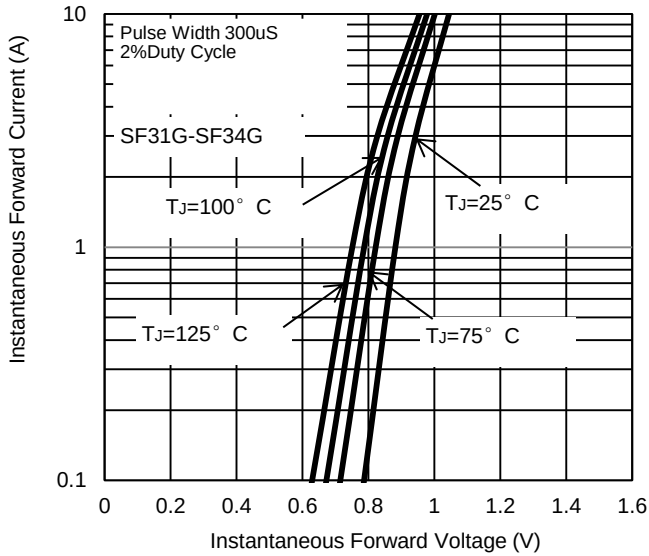


Fig. 5 - Typical Forward Characteristics


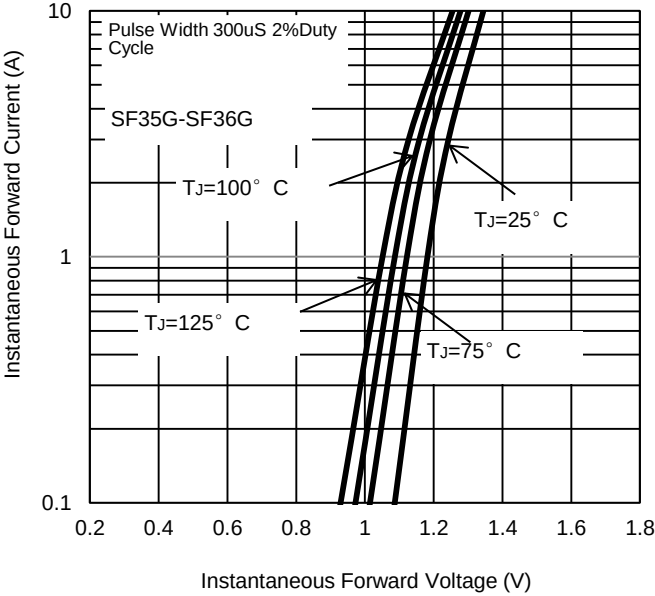


Fig. 6 - Typical Forward Characteristics

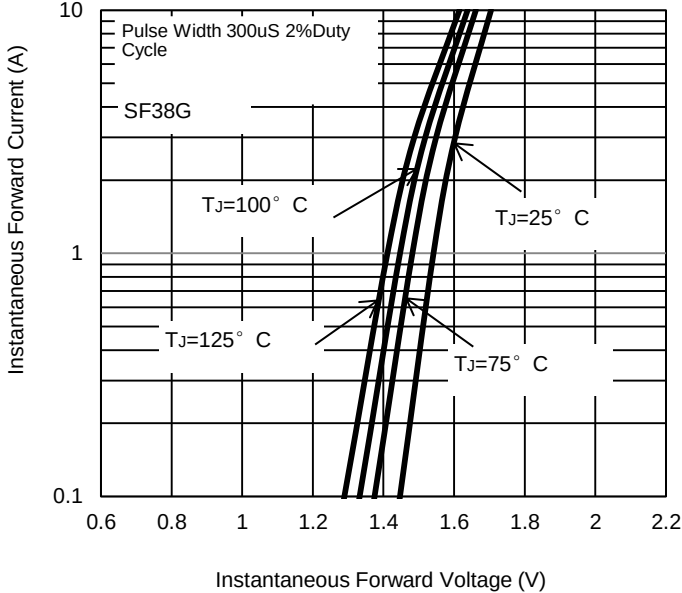

The curve above is for reference only.