



PRINCIPAL SPECIFICATIONS

Model Number	Center Frequency, f_0 , GHz	Phase Shift Range
PSAM-3-***B	0.5 to 2.5	180° at f_0
PSAM-4-***B	0.5 to 2.5	360° at f_0


For complete Model Number replace *** with desired Center Frequency, f_0 in MHz.

GENERAL SPECIFICATIONS

Bandwidth:	10% of f_0
Insertion Loss:	
PSAM-3 series @ 1 GHz:	3 dB typ.
@ 2.5 GHz:	4 dB typ.
PSAM-4 series @ 1 GHz:	4 dB typ.
@ 2.5 GHz:	6 dB typ.
Modulation Rate:	1% of f_0 nom.
Impedance:	50 Ω nom.
VSWR: PSAM-3 series:	2.0:1 max.
PSAM-4 series:	2.5:1 max.
Input Power:	0 dBm max.*
Control Voltage for full range:	0.5 to +30 V_{max} .
Connectors:	SMA Female
Weight, nominal:	4 oz. (112 g)
Phase Stability, typical:	
PSAM-3 series:	0.1° per °C
PSAM-4 series:	0.2° per °C
Operating Temp:	-55° to +85°C

*Unit may be operated at +10 dBm in reduced control range of 1.5 - 15 V. (+30 V no damage)

Package Outline

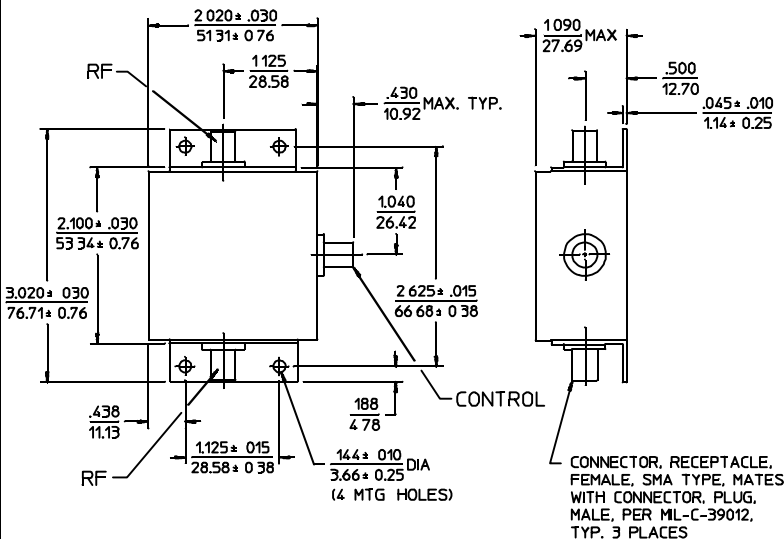

NOTES: 1. Tolerance on 3 place decimals $\pm .020(.51)$ except as noted.
2. Dimensions in inches over millimeters.

OPTIONAL SPECIFICATIONS

Lower Frequencies:	see PSEM series
Flatpack Version:	see PEF series

General Notes:

- The PSAM series of voltage controlled analog phase shifters controls phase shift using a voltage of 0 to +30V. On PSAM-3 models the full range is from 0° to 180° and on PSAM-4 this is extended to 0° to 360° by cascading two similar 180° phase shifters.
- Each phase shifter element employs Filmbrid™ quadrature hybrids with matched pairs of varactor tuned LC networks acting as sliding short circuits on the outputs. The electrical length of short effectively delays the reflected signal which appears at the isolated port of each quadrature hybrid.
- Similar phase shifters are available in a variety of packages including catalog models in flatpacs and Meri-Pacs.
- Merrimac phase shifters are designed for high reliability and can be supplied screened to meet specific military and space applications.

15Feb96