HSF

NOTES:
Current Rating: 1.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material:Brass
Contact plating:Au Or Sn over Ni
Insulator Material:PA9T+33%G.F UL94V-0

Ordering Information

3130- XX S XX B K 00 X X

No.of Pins	Contact Plating	Color Insulator	Packing
10 34	G0=Gold Flash	B=Black	T=Tube
12 40	G3=10u"Gold	W=White	P=Tube+CAP
14 44	G4=15u"Gold		R=Tape&Reel+CAP
16 50	G5=30u"Gold		
20 60	S0=Gold Flash/Tin		
24 64	S3=10u"Gold/Tin		
26 80	S4=15u"Gold/Tin		
30 100	S5=30u"Gold/Tin		
32	SN=Tin		

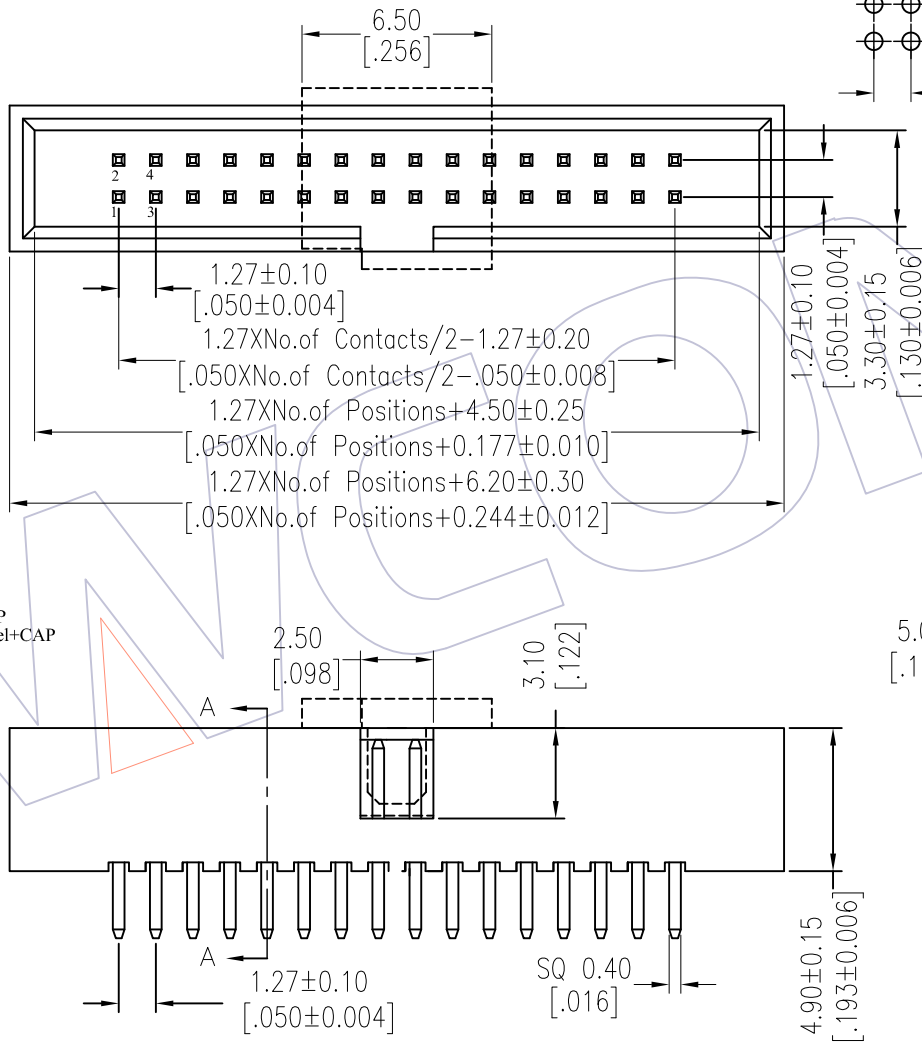

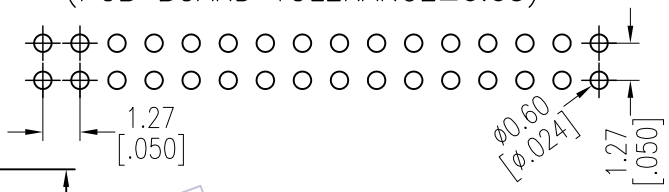

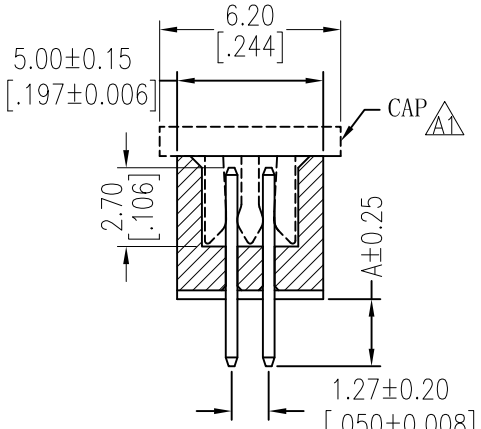

Item	Pitch	Mating	Dip(A)
Standard	1.27	5232/2334	2.30
			3.00
Alternate			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2017/11/28	Add the CAP	------
A0	2012/09/18	NEW	------

OPERATION		DRAW	DATE
X.X	±0.40	Ding	2017/11/28
X.XX	±0.25	CHECK	DATE
X.XXX	±0.15		
Angle	± 3°	APPROVE	DATE
DIM	TOL		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 3130-XXSXXBK00XX

TITLE: 1.27 BOX HEADER 180° H=4.90

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com