128K x 8 SRAM

High-Speed CMOS SRAM with 3.3V Revolutionary Pinout

FEATURES

- High-speed access times of 10, 12, 15 and 20 ns
- High-performance, low-power CMOS process
- Multiple center power and ground pins for greater noise immunity
- Easy memory expansion with CE\ and OE\ options
- CE\ power-down
- Fully static operation: no clock or refresh required
- TTL compatible inputs and outputs
- Single 3.3V power supply

OPTIONS — MARKING

- Timing
  - 10ns access — -10
  - 12ns access — -12
  - 15ns access — -15
  - 20ns access — -20
- Package
  - Plastic SOJ (32-pin, 400-mil) — DJ — No. 906
  - *Ceramic SOJ (32-pin, 400-mil) — DCJ — No. 501
- Operating Temperature Ranges
  - -Military (-55°C to +125°C) — XT
  - -Industrial (-40°C to +85°C) — IT

Consult Factory, Possible Future Offering

GENERAL DESCRIPTION

The ASI AS5LC1008 is a very high-speed, low power, 131,072-word by 8-bit CMOS static RAM in revolutionary pinout. The AS5LC1008 is fabricated using high-performance CMOS technology. This highly reliable process coupled with innovative circuit design techniques, yields higher performance and low power consumption devices.


When CE\ is HIGH (deselected), the device assumes a standby mode at which the power dissipation can be reduced down to 250µW (typical) with CMOS input levels.

The AS5LC1008 operates from a single 3.3V power supply and all inputs are TTL-compatible.

PIN ASSIGNMENT

(Top View)

32-Pin, 400-mil
Plastic SOJ (DJ) & Ceramic SOJ (DCJ)

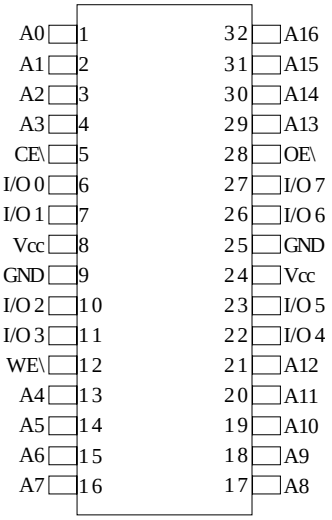


PIN FUNCTIONS

PIN	DESCRIPTION
A0 - A16	Address Inputs
CE\	Chip Enable Input
OE\	Output Enable Input
WE\	Write Enable Input
I/O0 - I/O7	Bidirectional Ports
V_{CC}	Power
GND	Ground

For more products and information please visit our web site at
www.austinsemiconductor.com

Austin Semiconductor, Inc. reserves the right to change products or specifications without notice.

FUNCTIONAL BLOCK DIAGRAM

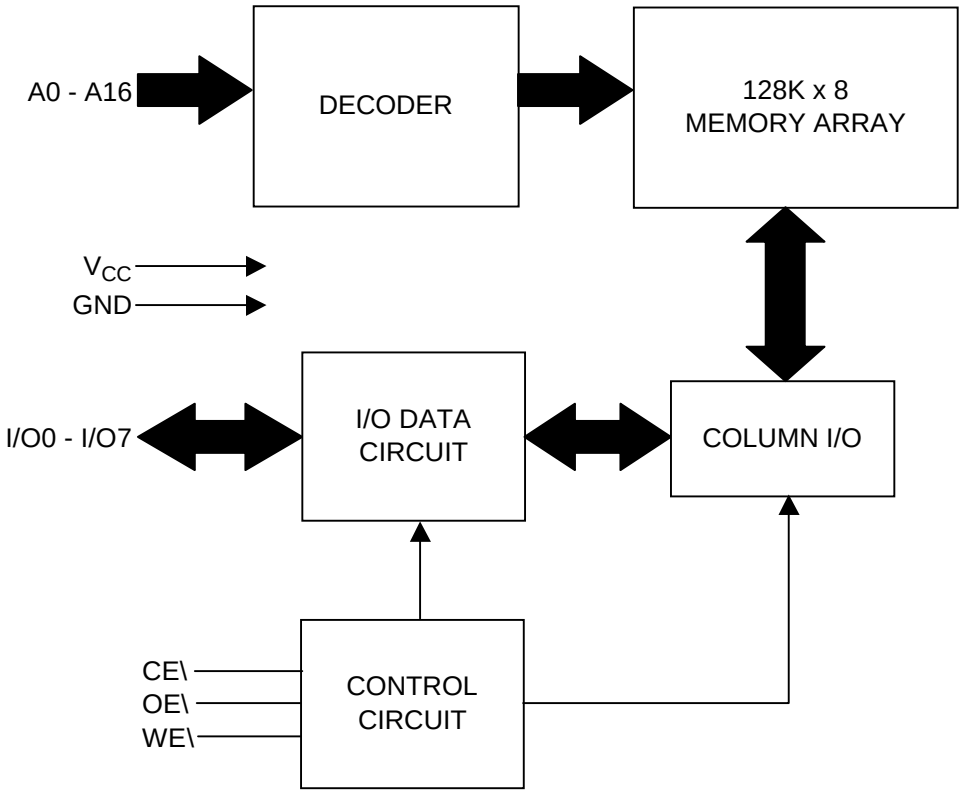

ABSOLUTE MAXIMUM RATINGS*

Terminal Voltage with Respect to GND (V_{TERM}).....-0.5V to V_{CC} + 0.5V
Temperature Under Bias (T_{BIAS}).....-55°C to +125°C
Storage Temperature (T_{STG}).....-65°C to +150°C
Power Dissipation (P_T).....1.0W

*Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

TRUTH TABLE

Mode	WE\	CE\	OE\	I/O Operation	V_{CC} Current
Not Selected (Power-down)	X	H	X	High-Z	I_{SB1}, I_{SB2}
Output Disabled	H	L	H	High-Z	I_{CC1}, I_{CC2}
Read	H	L	L	D_{OUT}	I_{CC1}, I_{CC2}
Write	L	L	X	D_{IN}	I_{CC1}, I_{CC2}

ELECTRICAL CHARACTERISTICS AND RECOMMENDED DC OPERATING CONDITIONS

($-55^oC \leq T_A \leq +125^oC$ or -40^oC to $+85^oC$; Vcc = 3.3V ±0.3V)

PARAMETER	SYMBOL	CONDITIONS	MIN	MAX	UNITS
Output HIGH Voltage	V_{OH}	V_{CC} = Min., I_{OH} = -4.0mA	2.4	---	V
Output LOW Voltage	V_{OL}	V_{CC} = Min., I_{OL} = 8.0mA	---	0.4	V
Input HIGH Voltage	V_{IH}		2.2	V_{CC} + 0.3	V
Input LOW Voltage[1]	V_{IL}		-0.3	0.8	V
Input Leakage	I_{LI}	$GND \leq V_{IN} \leq V_{CC}$	-5	5	µA
Output Leakage	I_{LO}	$GND \leq V_{OUT} \leq V_{CC}$; Outputs Disabled	-5	5	µA

NOTE: 1. V_{IL} = -3.0V for pulse width less than 10ns.

POWER SUPPLY CHARACTERISTICS[1]

($-55^oC \leq T_A \leq +125^oC$ or -40^oC to $+85^oC$; Vcc = 3.3V ±0.3V)

			-10		-12		-15		-20		
PARAMETER	SYM	CONDITIONS	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	UNIT
V_{CC} Dynamic Operating Supply Current	I_{CC}	V_{CC} = Max, CE\ = V_{IL}, I_{OUT} = 0 mA, f = Max	---	160	---	140	---	130	---	120	mA
TTL Standby Current (TTL Inputs)	I_{SB}	V_{CC} = Max, V_{IN} = V_{IH} or V_{IL} CE\ ≥ V_{IH}, f = Max	---	45	---	40	---	35	---	30	mA
	I_{SB1}	V_{CC} = Max, V_{IN} = V_{IH} or V_{IL} CE\ ≥ V_{IH}, f = 0	---	30	---	30	---	30	---	30	mA
CMOS Standby Current (CMOS Inputs)	I_{SB2}	$V_{IN} \geq V_{CC}$ - 0.2V, or $V_{IN} \leq$ 0.2V, f = 0	---	10	---	10	---	10	---	10	mA

NOTE: 1. At f = f_{MAX}, address and data inputs are cycling at the maximum frequency, f = 0 means no input lines change.

CAPACITANCE[1,2]

PARAMETER	SYMBOL	CONDITIONS	MAX	UNIT
Input Capacitance	C_{IN}	V_{IN} = 0V	6	pF
Input/Output Capacitance	$C_{I/O}$	V_{OUT} = 0V	8	pF

NOTE:

1. Tested initially and after any design or process changes that may affect these parameters.
2. Test conditions: T_A = 25°C, f = 1MHz, V_{CC} = 3.3V.

Austin Semiconductor, Inc. reserves the right to change products or specifications without notice.

READ CYCLE SWITCHING CHARACTERISTICS[1]

($-55^oC \leq T_A \leq +125^oC$ or -40^oC to $+85^oC$; Vcc = 3.3V ±0.3V)

		-10		-12		-15		-20		
PARAMETER	SYMBOL	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	UNIT
Read Cycle Time	t_{RC}	10	---	12	---	15	---	20	---	ns
Address Access Time	t_{AA}	---	10	---	12	---	15	---	20	ns
Output Hold time	t_{OHA}	2	---	2	---	2	---	2	---	ns
CE\ Access Time	t_{ACE}	---	10	---	12	---	15	---	20	ns
OE\ Access Time	t_{DOE}	---	5	---	6	---	7	---	8	ns
OE\ to Low-Z Output	t_{LZOE}[2]	0	---	0	---	0	---	0	---	ns
OE\ to High-Z Output	t_{HZOE}[2]	0	5	0	6	0	7	0	8	ns
CE\ to Low-Z Output	t_{LZCE}[2]	2	---	2	---	2	---	2	---	ns
CE\ to High-Z Output	t_{HZCE}[2]	0	5	0	6	0	7	0	8	ns

NOTES:
1. Test conditions assume signal transition times of 3ns or less, timing reference levels of 1.5V, input pulse levels of 0 to 3.0V and C1 output loading specified in Figure 1.
2. Tested with the C2 load in Figure 1. Transition is measured ±500 mV from steady-state voltage. Not 100% tested.

AC TEST CONDITIONS

PARAMETER	UNIT
Input Pulse Level	0V to 3.0V
Input Rise and Fall Times	3ns
Input and Output timing and Reference Levels	1.5V
Output Load	See Figures 1 and 2

AC TEST LOADS

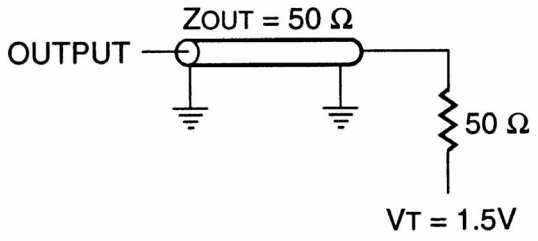


FIGURE 1


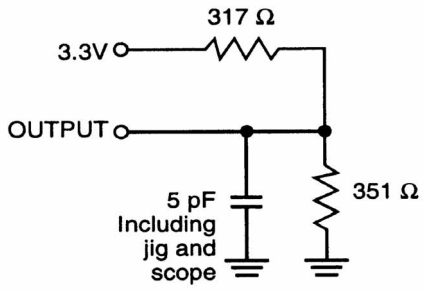



FIGURE 2

Austin Semiconductor, Inc. reserves the right to change products or specifications without notice.

READ CYCLE #1[1,2]

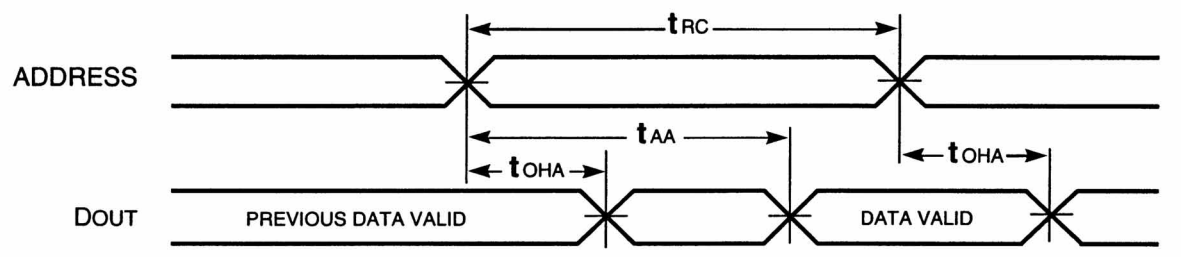

READ CYCLE #2[1,3]

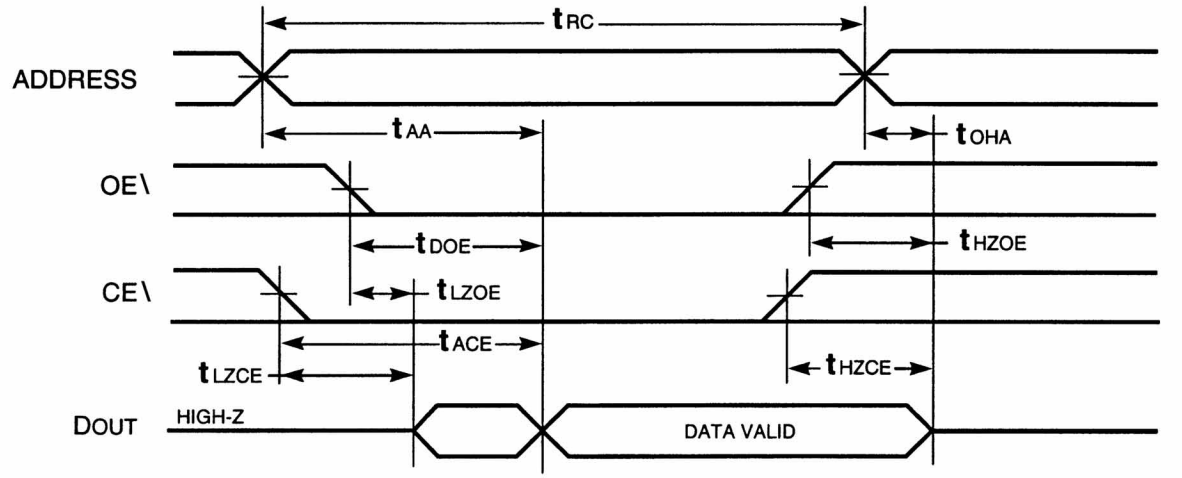

NOTES:

1. WE\ is HIGH for a Read Cycle.
2. The device is continuously selected. OE\, CE\ = V_{IL}.
3. Address is valid prior to or coincident with CE\ LOW transitions.

WRITE CYCLE SWITCHING CHARACTERISTICS[1,3]


(-55°C ≤ T_A ≤ +125°C or -40°C to +85°C; Vcc = 3.3V ±0.3V)

		-10		-12		-15		-20		
PARAMETER	**SYMBOL**	**MIN**	**MAX**	**MIN**	**MAX**	**MIN**	**MAX**	**MIN**	**MAX**	**UNITS**
Write Cycle Time	t_{WC}	10	---	12	---	15	---	20	---	ns
CE\ to Write End	t_{SCE}	7	---	8	---	9	---	10	---	ns
Address Setup Time to Write End	t_{AW}	8	---	9	---	10	---	12	---	ns
Address Hold from Write End	t_{HA}	0	---	0	---	0	---	0	---	ns
Address Setup Time	t_{SA}	0	---	0	---	0	---	0	---	ns
WE\ Pulse Width (OE\ HIGH)	t_{PWE1}[1]	7	---	8	---	9	---	10	---	ns
WE\ Pulse Width (OE\ LOW)	t_{PWE2}[2]	10	---	12	---	12	---	15	---	ns
Data Setup to Write End	t_{SD}	5	---	6	---	7	---	8	---	ns
Data Hold to Write End	t_{HD}	0	---	0	---	0	---	0	---	ns
WE\ LOW to High-Z Output	t_{HZWE}[2]	---	5	---	6	---	7	---	8	ns
WE\ HIGH to Low-Z Output	t_{LZWE}[2]	2	---	2	---	2	---	2	---	ns

NOTES:


1. Test conditions assume signal transition times of 3ns or less, timing reference levels of 1.5V, input pulse levels of 0 to 3.0V and output loading specified in Figure 1.
2. Tested with the load in Figure 2. Transition is measured ±200 mV from steady-state voltage. Not 100% tested.
3. The internal write time is defined by the overlap of CE\ LOW and WE\ LOW. All signals must be in valid states to initiate a Write, but any one can go inactive to terminate the Write. The Data Input Setup and Hold timing are referenced to the rising or falling edge of the signal that terminates the Write.

WRITE CYCLE #1[1,2] (CE\ Controlled, OE\ = HIGH or LOW)

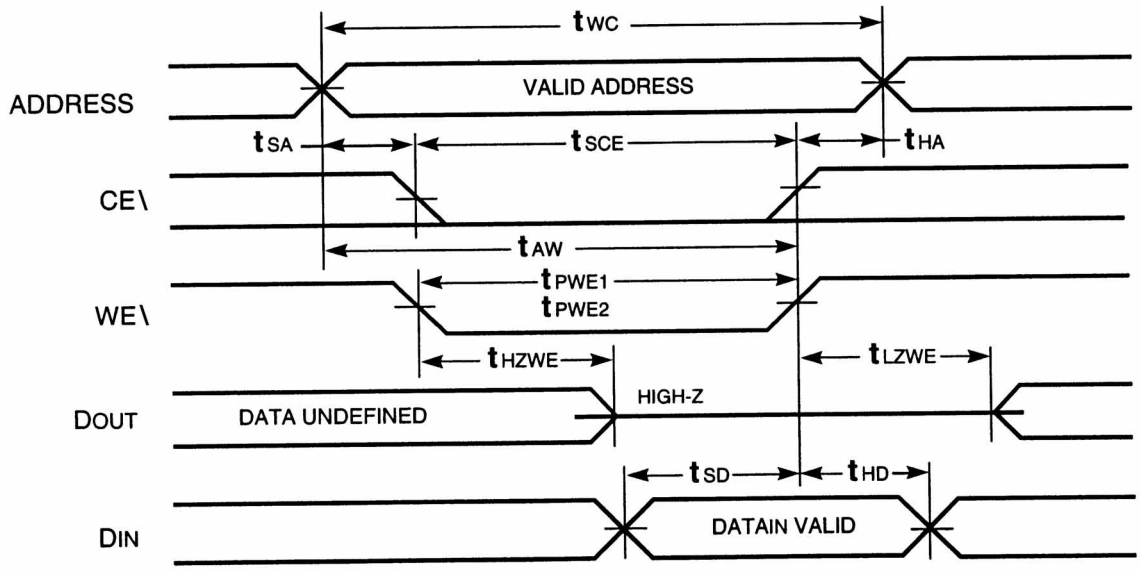


Austin Semiconductor, Inc. reserves the right to change products or specifications without notice.

WRITE CYCLE #2[1] (WE\ Controlled, OE\ = HIGH during Write Cycle)

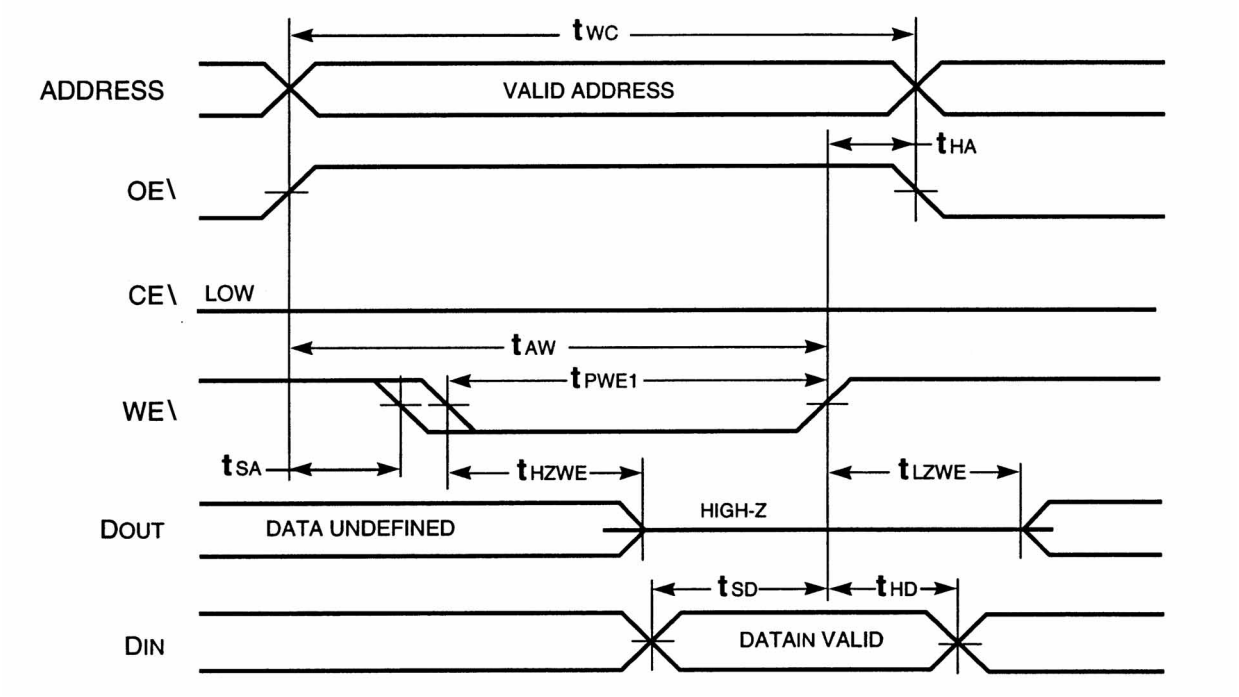

WRITE CYCLE #3 (WE\ Controlled, OE\ = LOW during Write Cycle)

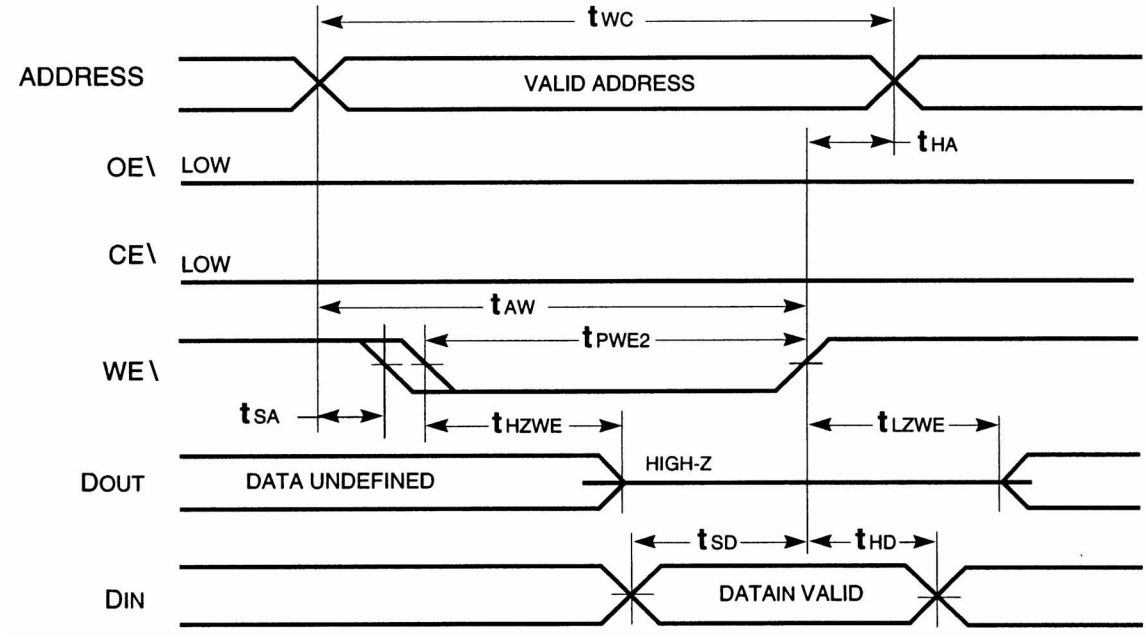


NOTES:

1. The internal write time is defined by the overlap of CE\ LOW and WE\ LOW. All signals must be in valid states to initiate a Write, but any one can go inactive to terminate the Write. The Data Input Setup and Hold timing are referenced to the rising or falling edge of the signal that terminates the Write.
2. I/O will assume the High-Z state if OE\ • V_{IH}.

Austin Semiconductor, Inc. reserves the right to change products or specifications without notice.

MECHANICAL DEFINITION*

ASI Case #906 (Package Designator DJ)

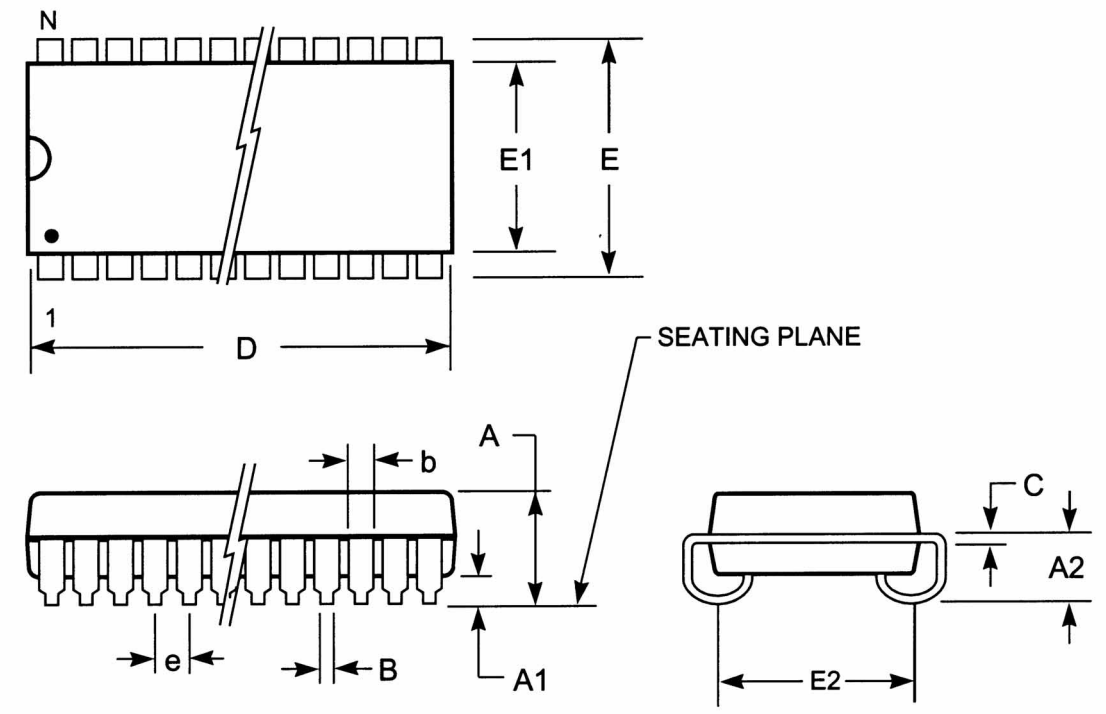


SYMBOL	ASI SPECIFICATIONS	
	MIN	MAX
A	0.128	0.148
A1	0.025	---
A2	0.082	---
B	0.015	0.020
b	0.026	0.032
C	0.007	0.013
D	0.820	0.830
E	0.435	0.445
E1	0.395	0.405
E2	0.370 BSC	
e	0.050 BSC	

**** All measurements are in inches.***

Austin Semiconductor, Inc. reserves the right to change products or specifications without notice.

MECHANICAL DEFINITIONS*

ASI Case #501 (Package Designator DCJ)
POSSIBLE FUTURE OFFERING, CONTACT FACTORY

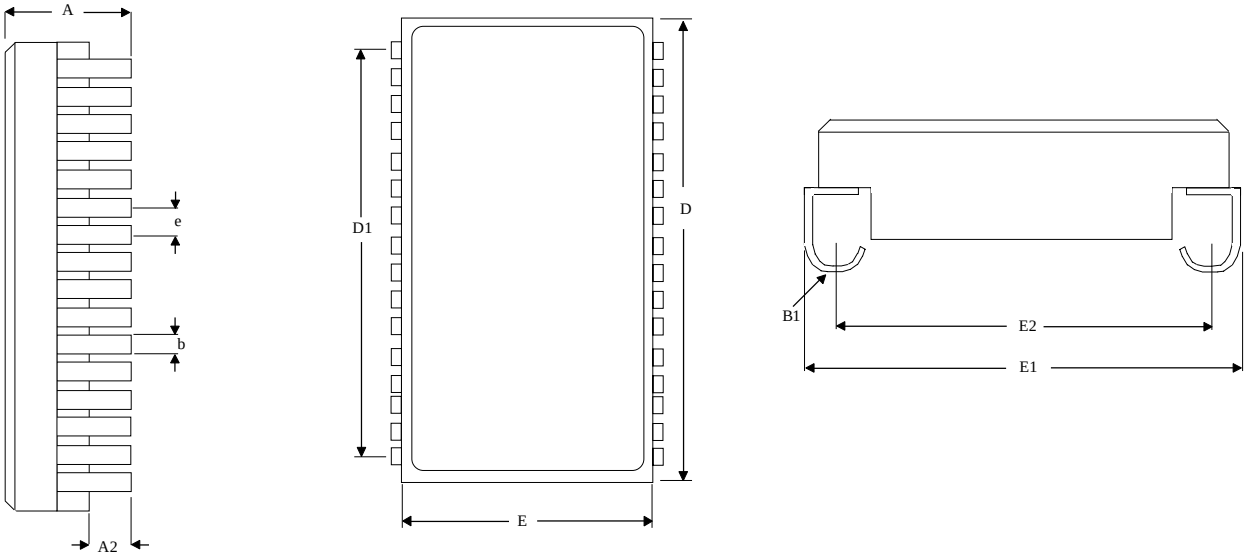

SYMBOL	ASI SPECIFICATIONS	
	MIN	MAX
A	0.132	0.144
A2	0.026	0.036
B1	0.030	0.040
B1	0.015	0.019
D	0.812	0.828
D1	0.740	0.760
E	0.405	0.415
E1	0.435	0.445
E2	0.360	0.380
e	0.050 BSC	

All measurements are in inches.

Austin Semiconductor, Inc. reserves the right to change products or specifications without notice.

ORDERING INFORMATION

EXAMPLE: AS5LC1008DJ-12/XT

Device Number	Package Type	Speed ns	Process
AS5LC1008	DJ	-10	/*
AS5LC1008	DJ	-12	/*
AS5LC1008	DJ	-15	/*
AS5LC1008	DJ	-20	/*

EXAMPLE: AS5LC1008DCJ-10/IT

Device Number	Package Type	Speed ns	Process
AS5LC1008	DCJ	-10	/*
AS5LC1008	DCJ	-12	/*
AS5LC1008	DCJ	-15	/*
AS5LC1008	DCJ	-20	/*

***AVAILABLE PROCESSES**

IT = Industrial Temperature Range -40°C to +85°C
XT = Military Temperature Range -55°C to +125°C

Austin Semiconductor, Inc. reserves the right to change products or specifications without notice.