



Class G fuse blocks are designed for use with 480 volt time-delay, current-limiting Class G fuses. They meet requirements for branch circuit protection.

## SPECIFICATIONS

**Voltage Ratings:** 600 Volts AC (0 – 20A)  
480 Volts AC (25 – 60A)

**Ampere Ratings:** 0 – 60 amperes

**Approvals:** UL Listed: 15, 20 & 60A (File No. E14853)  
30A (File No. E14721)




CSA Certified: 15, 20 & 60A (File No. LR47235)  
30A (File No. LR7316)

## RECOMMENDED FUSES

SLC series fuses

Amp Rating	No. of Poles	Catalog Number	Connector Type (Add suffix shown)			Maximum Wire Size
			Screw	Pressure Plate	Box Lug	
15*	1	LG30015-1	SQ			#10 CU
	2	LG30015-2	SQ			
	3	LG30015-3	SQ			
20*	1	LG30020-1	SQ			#10 CU
	2	LG30020-2	SQ			
	3	LG30020-3	SQ			
30*	1	L30030G-1	SQ	PQ		#10 CU
	2	L30030G-2	SQ	PQ		
	3	L30030G-3	SQ	PQ		
60	1	LG30060-1			CR	#2 CU-AL
	2	LG30060-2			CR	
	3	LG30060-3			CR	

\* Note: 15, 20 & 30A Class G fuse blocks are equipped with 20A Quick Connect Terminals. 60A fuse block equipped with reinforcing spring as standard.

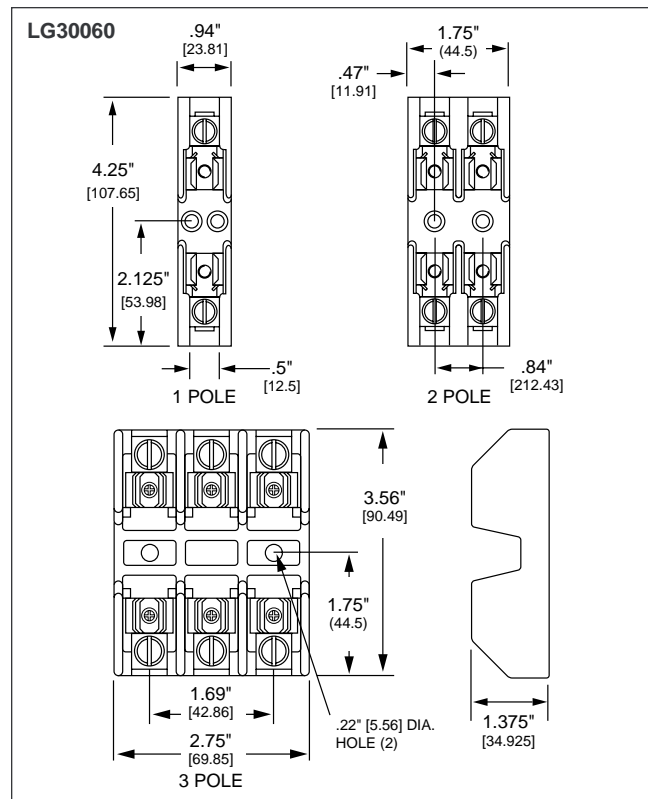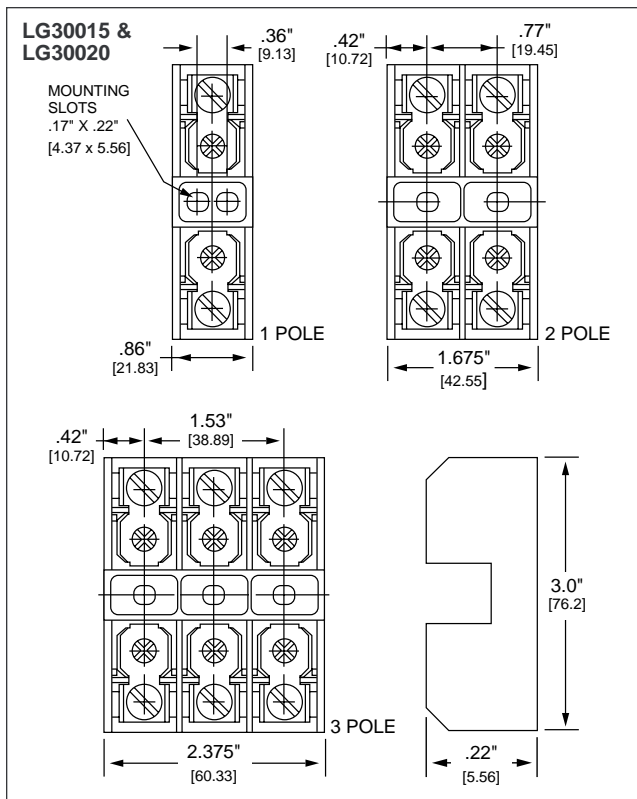

Note: Refer to the Midget/Class CC Fuse Blocks for L30030G 30A Class G Block dimensions.