

DIODE MODULE (F.R.D.)

FRS400EA180/200

TOP




UL;E76102 (M)

FRS400EA is a high speed isolated diode module designed for high power switching application. **FRS400EA** is suitable for high frequency application requiring low loss and high speed control.

- High Speed $t_{rr} \leq 700\text{ns}$
- I_F (AV) 400A
- Isolated Mounting base.
- High Surge Capability

(Applications)

Inverter Welding Power Supply
Power Supply for Telecommunication
Various Switching Power Supply.

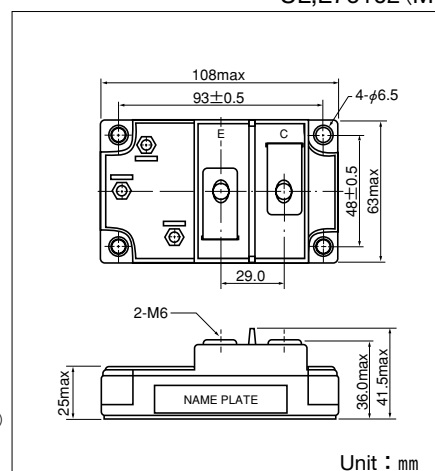

Maximum Ratings

($T_j = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Item	Ratings		Unit
		FRS400EA180	FRS400EA200	
V_{RRM}	Repetitive Peak Reverse Voltage	1800	2000	V
$V_R(DC)$	D.C. Reverse Voltage	1440	1600	V

Symbol	Item	Conditions	Ratings	Unit
I_F (AV)	Forward Current	D.C. $T_c : 79^\circ\text{C}$	400	A
I_{FMS}	Surge Forward Current	$\frac{1}{2}$ cycle, 60Hz, peak value, non-repetitive	5000	A
I^2t	I^2t	Value for one cycle of surge current	104000	A^2S
T_j	Operating Junction Temperature		-40 to $+150$	$^\circ\text{C}$
T_{stg}	Storage Temperature		-40 to $+125$	$^\circ\text{C}$
V_{iso}	Isolation Breakdown Voltage (R.M.S.)	A.C. 1 minute	2500	V
	Mounting Torque	Mounting(M6)	Recommended Value 2.5-3.9 (25-40)	$\text{N}\cdot\text{m}$
		Terminal (M6)	Recommended Value 2.5-3.9 (25-40)	$(\text{kgf}\cdot\text{cm})$
	Mass	Typical Value	460	g

Electrical Characteristics

Symbol	Item	Conditions	Ratings			Unit
			Min.	Typ.	Max.	
I_{RRM}	Repetitive Peak Reverse Current	$V_R = V_{RRM}$, $T_j = 150^\circ\text{C}$			100	mA
V_{FM}	Forward Voltage Drop	$T_j = 125^\circ\text{C}$, $I_F = 400\text{A}$, Inst. measurement			2.20	V
t_{rr}	Reverse Recovery Time	$I_F = 400\text{A}$, $-di/dt = 400\text{A}/\mu\text{s}$			700	ns
$R_{th}(j-c)$	Thermal Impedance	Junction to case			0.08	$^\circ\text{C}/\text{W}$

