



1. CONFIGURATION & DIMENSIONS :

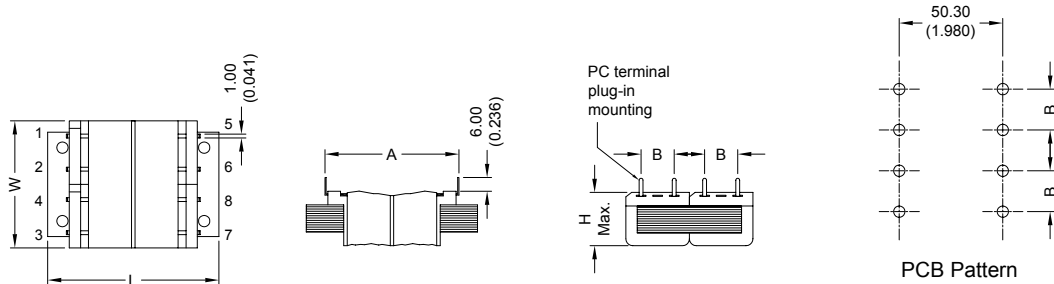

UNIT : mm (inch)

SIZE	L	W	H	A	B	gram
12	64.70 (2.547)	50.00 (1.969)	26.30 (1.035)	50.80 (2.000)	12.70 (0.500)	311.85

2. SCHEMATIC :



3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

- | | |
|--------------------------------------|------------------------------|
| a. Primary Voltage | AC 115/230 V 50/60 Hz . |
| b. NO Load Primary Current | Less Than 30mA . |
| Input AC 115V 60Hz . | Less Than 30mA . |
| Input AC 230V 50Hz . | Series AC 24.20V . |
| c. Secondary Voltage (±5%) | Parallel AC 12.10V . |
| d. Secondary Load Current | Series 600mA . |
| e. Full Load Primary Current | Parallel 1200mA . |
| Input AC 115V 60Hz . | Less Than 80mA . |
| Input AC 230V 50Hz . | Less Than 150mA . |
| f. Full Load Secondary Voltage (±5%) | Series 20.00V . |
| g. DC Resistance | Parallel 10.00V . |
| Pin 1-2 | Primary = 146 Ohm . |
| Pin 3-4 | = 146 Ohm . |
| Pin 5-6 | Secondary = 1.75 Ohm . |
| Pin 7-8 | = 1.75 Ohm . |
| h. Insulation Resistance | DC 500V 100Meg Ohm Of More . |
| i. Withstand Voltage (Hi-Pot) | AC 1500V 60Hz 1 Minutes . |
| j. Temperature Rise | Less Than 60 Deg C . |
| k. Core Size | UI-38 x 13.00 m/m . |



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

05.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD