
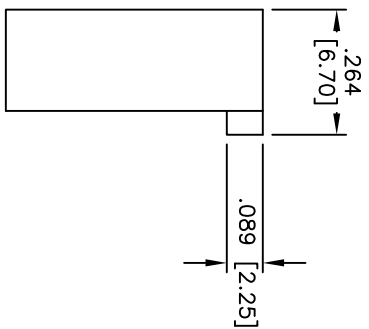
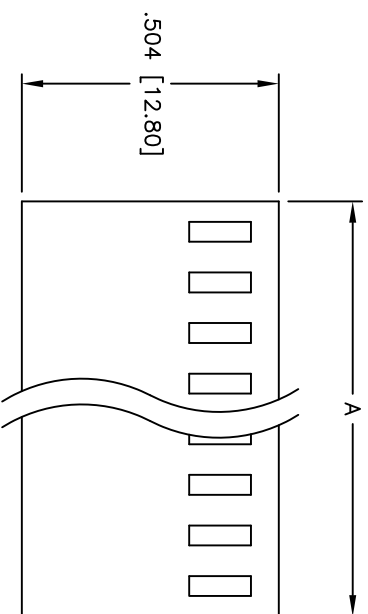


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/8/05	
A		REVISED DIM.	12/8/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

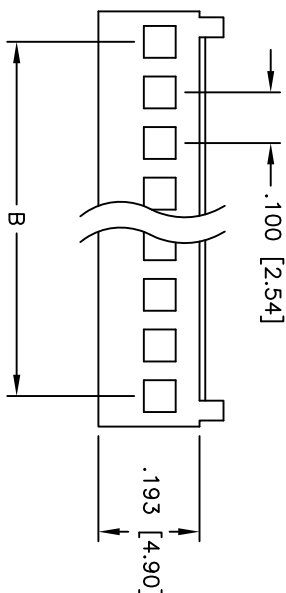

**SPECIFICATIONS:**

Material: Insulator: Nylon 66, rated UL 94V-2  
 Insulator color: White  
 Electrical: Operating voltage: 250 VAC max  
 Current rating: 3 Amps max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
 Temperature Rating: Operating temperature: -25°C to +85°C  
 Environmental: Lead free, RoHS compliant

Positions: 2 thru 20  
 A = .100 [2.54] x No. of Positions + .022 [0.57]  
 B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

.100 [2.54] WIRE HOUSING

APPROVALS	DATE	TITLE
DRAWN SS	4/8/05	SIZE PART NO. MTS-XX SCALE: MTS
CHECKED		
APPROVED		

