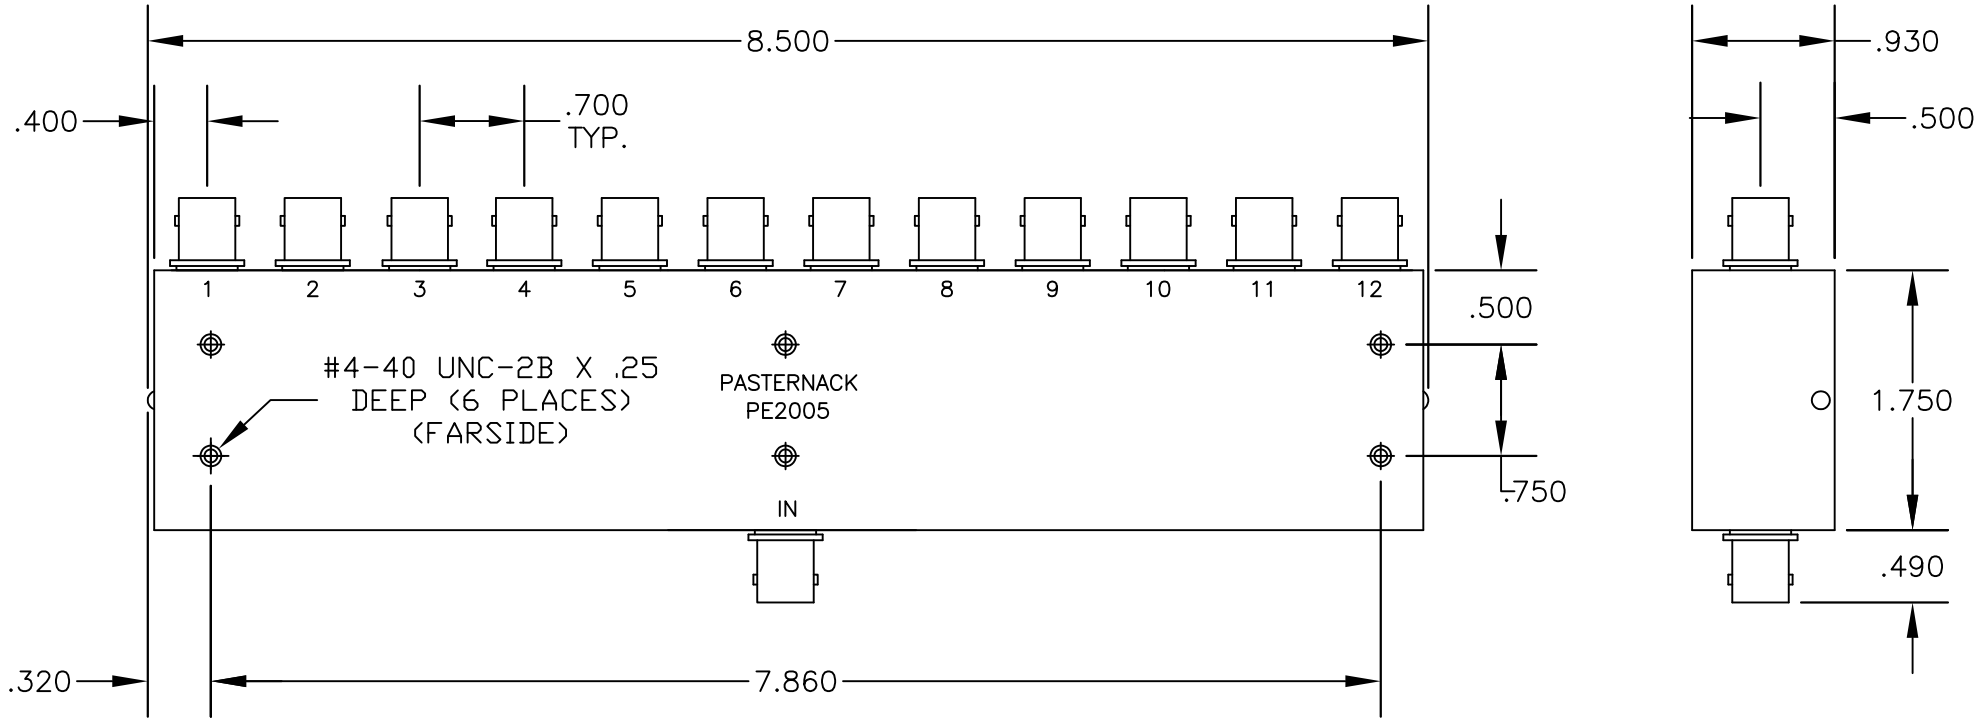


SPECIFICATIONS

FREQUENCY RANGE: 2 TO 500 MHz
NUMBER OF OUTPUT PORTS: 12
MINIMUM ISOLATION: 25 dB
MAXIMUM VSWR: 1.50
MAXIMUM INSERTION LOSS: 3.00 dB

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

DWG TITLE	DES.
PE2005	BNC FEMALE POWER DIVIDER FREQUECY RANGE 2-500 MHz 12 OUTPUT PORTS, BNC FEMALE

SIZE A	FSCM NO. 53919	CAD FILE 032002	SCALE N/A		127

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.