

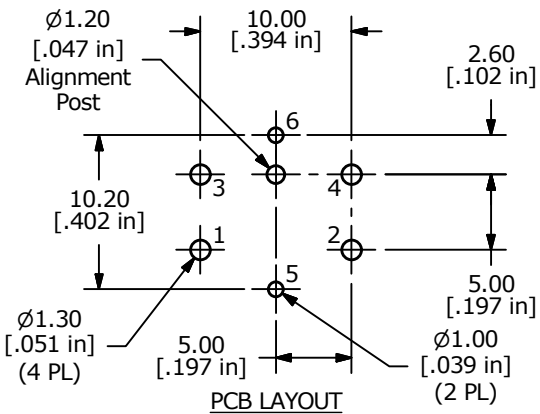
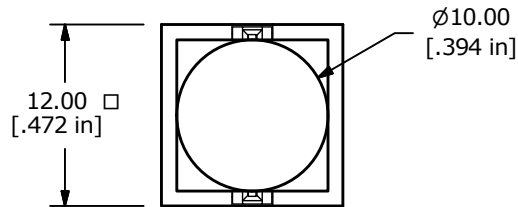
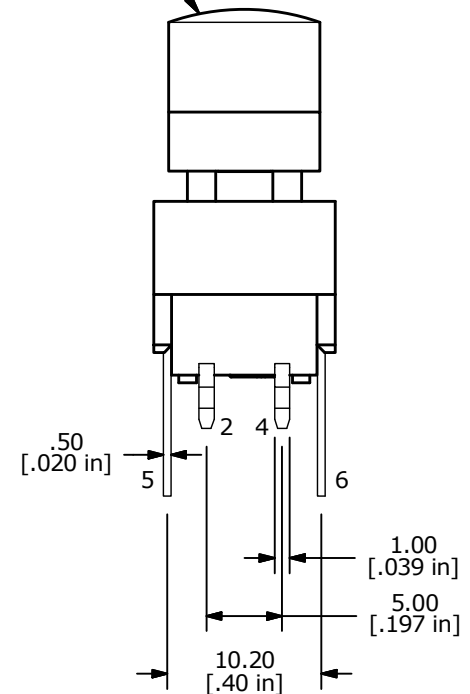


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 20VDC @ 1mA, 5VDC @ 5mA
4. CONTACT RESISTANCE: 200 Ω MAX.
5. INSULATION RESISTANCE: 100M Ω MIN. @ 100VDC.
- ▲ 6. OPERATING FORCE: 125 $\pm$ 35gf
7. TRAVEL: 1.25 $\pm$ 0.3 mm
8. OPERATING TEMPERATURE: -40°C to 85°C
9. OPERATING LIFE: 1,000,000 CYCLES
- ▲ 10. LED: WHITE
11. ▲ DENOTES CRITICAL PARAMETERS
12. 2011/65/EU (ROHS) COMPLIANT
13. CONTACT MATR'L: GOLD FLASH OVER NICKEL

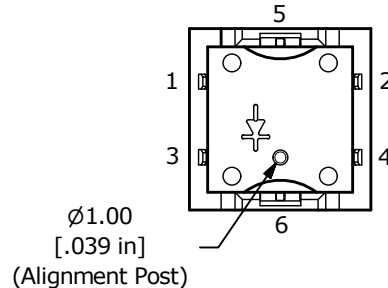

▲ WHITE CAP
with
WHITE LED

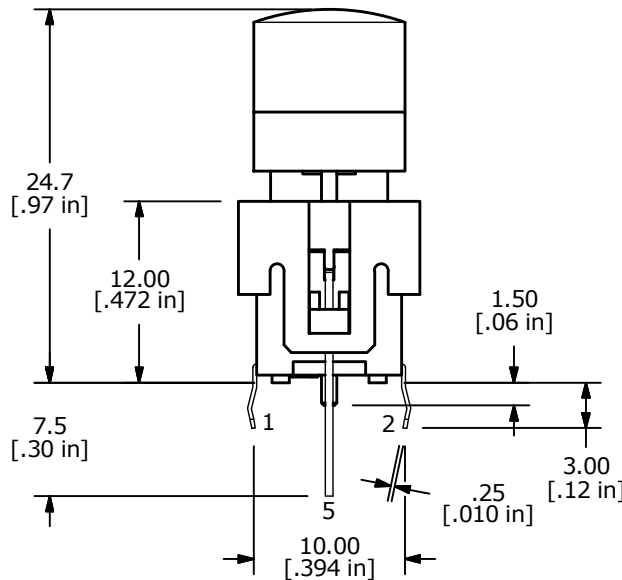

▲ LED SPECS	UNITS	WHITE	
FORWARD CURRENT	mA	20	
FORWARD VOLTAGE @ 20mA	VDC	2.8 MIN.	4.0 MAX.
LUMINOUS INTENSITY @ 20mA	mcd	400 TYP.	



E-SWITCH®

A	22990	New Release	9/15/17	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE LP15R1WHTWHT-N

SCALE	DATE	DR	DWG	REV
2 : 1	9/11/2017	MW	B270010	A