

APTGT150A170D1

Phase leg
Trench IGBT® Power Module

V_{CES} = 1700V
I_C = 150A @ Tc = 80°C

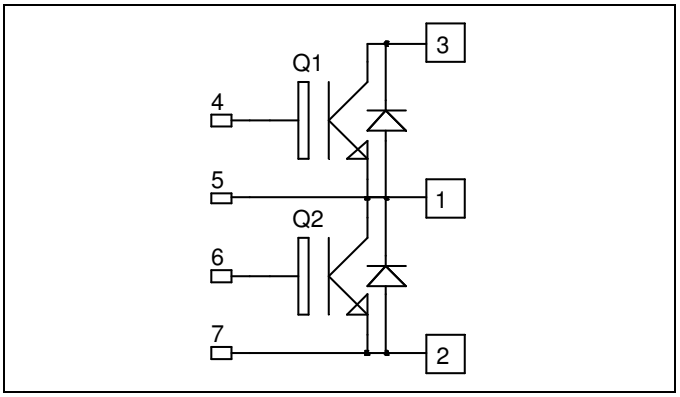

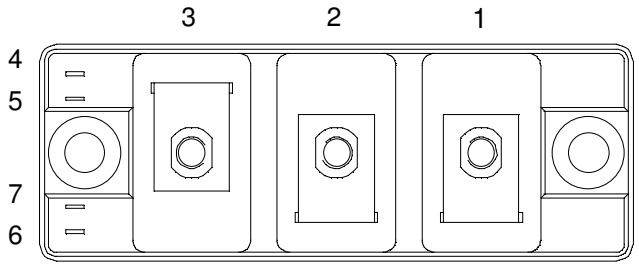

Application

- Welding converters
- Switched Mode Power Supplies
- Uninterruptible Power Supplies
- Motor control

Features

- Trench + Field Stop IGBT® Technology
  - Low voltage drop
  - Low tail current
  - Switching frequency up to 20 kHz
  - Soft recovery parallel diodes
  - Low diode VF
  - Low leakage current
  - Avalanche energy rated
  - RBSOA and SCSOA rated
- Kelvin emitter for easy drive
- Low stray inductance
- High level of integration
- Kelvin emitter for easy drive
- Low stray inductance
  - M5 power connectors

Benefits

- Stable temperature behavior
- Very rugged
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Easy paralleling due to positive TC of VCEsat

Absolute maximum ratings

Symbol	*Parameter*		*Max ratings*	*Unit*
V_{CES}	Collector - Emitter Breakdown Voltage		1700	V
I_C	Continuous Collector Current	T_C = 25°C	280	A
		T_C = 80°C	150	
I_{CM}	Pulsed Collector Current	T_C = 25°C	300	
V_{GE}	Gate – Emitter Voltage		±20	V
P_D	Maximum Power Dissipation	T_C = 25°C	780	W
RBSOA	Reverse Bias Safe Operation Area	T_j = 125°C	300A@1600V	

CAUTION: These Devices are sensitive to Electrostatic Discharge. Proper Handing Procedures Should Be Followed.

All ratings @ T_j = 25°C unless otherwise specified

Electrical Characteristics

Symbol	*Characteristic*	*Test Conditions*		*Min*	*Typ*	*Max*	*Unit*
BV_{CES}	Collector - Emitter Breakdown Voltage	V_{GE} = 0V, I_C = 4mA		1700			V
I_{CES}	Zero Gate Voltage Collector Current	V_{GE} = 0V, V_{CE} = 1700V				4	mA
$V_{CE(on)}$	Collector Emitter on Voltage	V_{GE} = 15V, I_C = 150A	T_j = 25°C		2.0	2.4	V
			T_j = 125°C		2.4		
$V_{GE(th)}$	Gate Threshold Voltage	V_{GE} = V_{CE}, I_C = 6 mA		5.2	5.8	6.4	V
I_{GES}	Gate – Emitter Leakage Current	V_{GE} = 20V, V_{CE} = 0V				200	nA

Dynamic Characteristics

Symbol	*Characteristic*	*Test Conditions*	*Min*	*Typ*	*Max*	*Unit*
C_{ies}	Input Capacitance	V_{GE} = 0V, V_{CE} = 25V f = 1MHz		13		nF
C_{res}	Reverse Transfer Capacitance			0.45		
$T_{d(on)}$	Turn-on Delay Time	Inductive Switching (25°C) V_{GE} = ±15V V_{Bus} = 900V I_C = 150A R_G = 10Ω		280		ns
T_r	Rise Time			100		
$T_{d(off)}$	Turn-off Delay Time			850		
T_f	Fall Time			120		
$T_{d(on)}$	Turn-on Delay Time	Inductive Switching (125°C) V_{GE} = ±15V V_{Bus} = 900V I_C = 150A R_G = 10Ω		330		ns
T_r	Rise Time			100		
$T_{d(off)}$	Turn-off Delay Time			1000		
T_f	Fall Time			200		
E_{off}	Turn Off Energy			47		mJ


Reverse diode ratings and characteristics

Symbol	*Characteristic*	*Test Conditions*		*Min*	*Typ*	*Max*	*Unit*
V_F	Diode Forward Voltage	I_F = 150A V_{GE} = 0V	T_j = 25°C		1.8	2.2	V
			T_j = 125°C		1.9		
E_r	Reverse Recovery Energy	I_F = 150A V_R = 900V di/dt =900A/µs	T_j = 25°C		17.5		mJ
			T_j = 125°C		35		
Q_{rr}	Reverse Recovery Charge	I_F = 150A V_R = 900V di/dt =900A/µs	T_j = 25°C		37.5		µC
			T_j = 125°C		62.5		

Thermal and package characteristics

Symbol	*Characteristic*			*Min*	*Typ*	*Max*	*Unit*
R_{thJC}	Junction to Case		IGBT			0.16	°C/W
			Diode			0.25	
V_{ISOL}	RMS Isolation Voltage, any terminal to case t =1 min, I isol<1mA, 50/60Hz			3500			V
T_J	Operating junction temperature range			-40		150	°C
T_{STG}	Storage Temperature Range			-40		125	
T_C	Operating Case Temperature			-40		125	
Torque	Mounting torque	For terminals	M5	2		3.5	N.m
		To Heatsink	M6	3		5	
Wt	Package Weight					180	g

Package outline

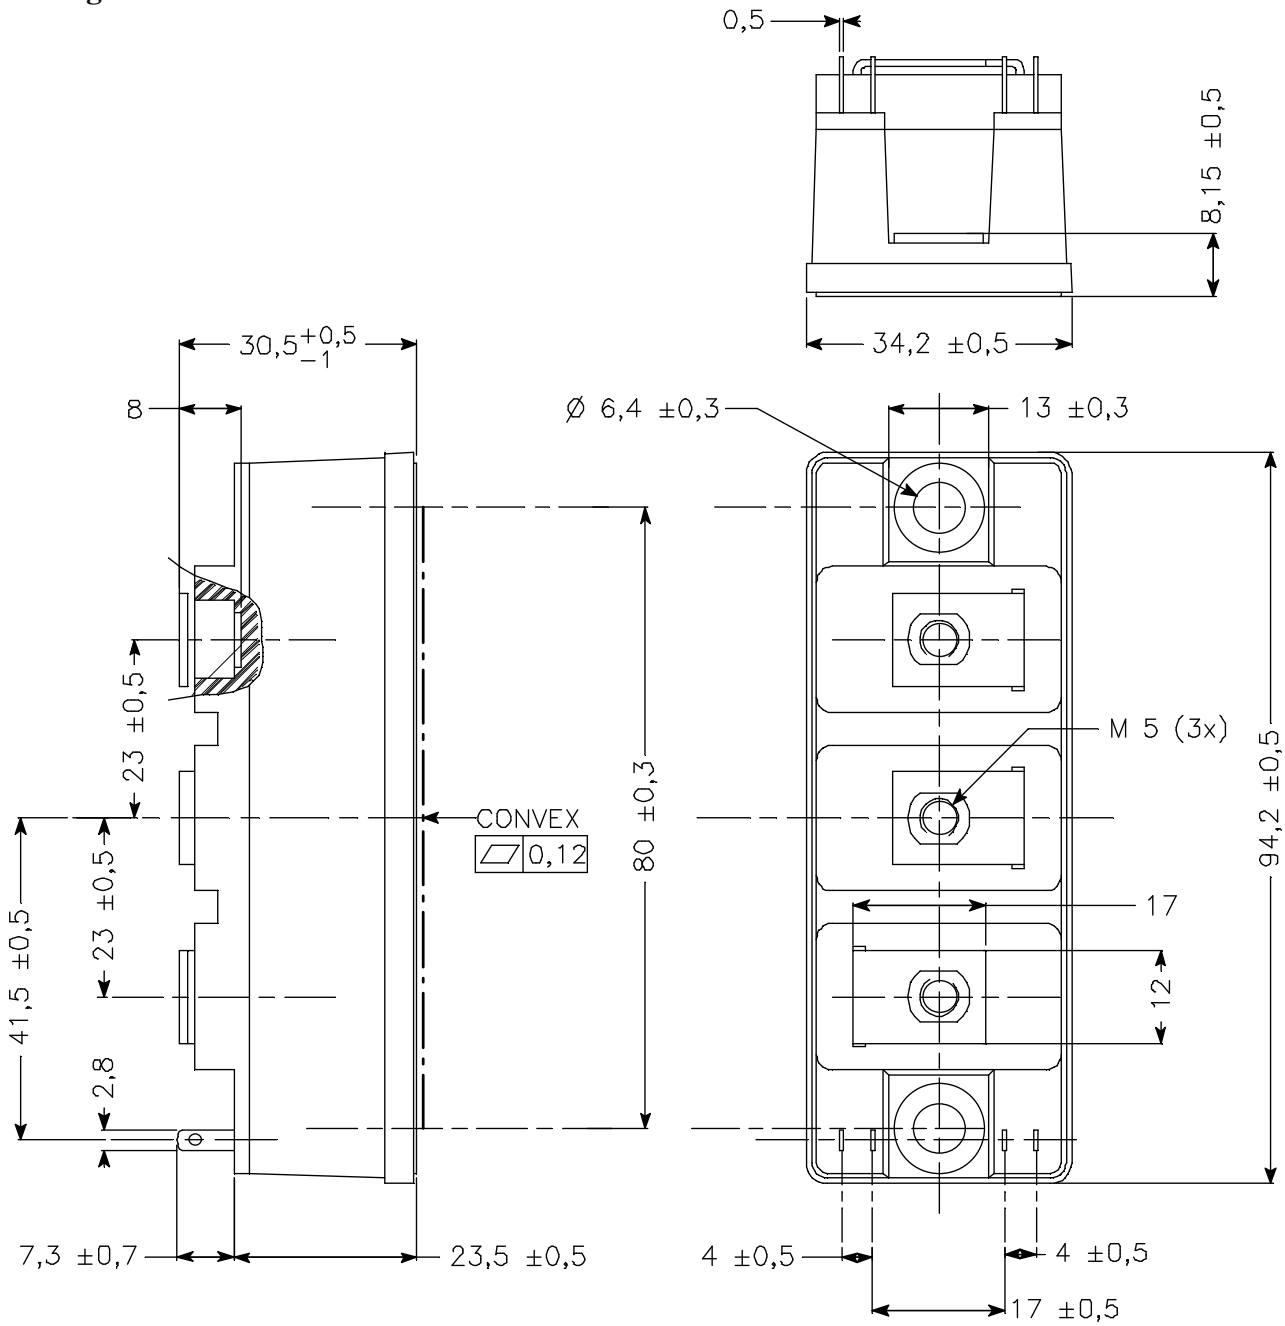

APT reserves the right to change, without notice, the specifications and information contained herein

APT's products are covered by one or more of U.S patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522
5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. U.S and Foreign patents pending. All Rights Reserved.