

MS9225-S series

MECHATRONICS®



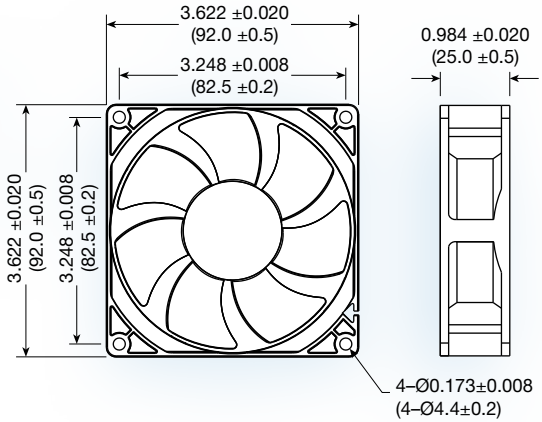

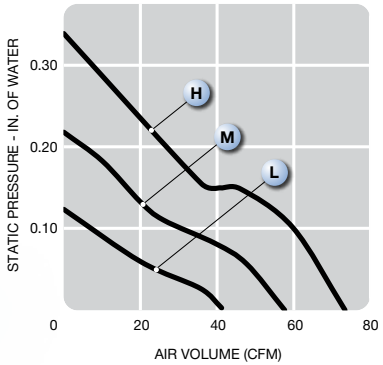

(92 x 92 x 25 mm)

3.62 x 3.62 x 1.00 inches

Features:	soft start, polarity protection, auto-restart
Operating Voltage:	12, 24 and 48 VDC
Construction:	UL94V-0 plastic impeller and plastic frame
Bearing option:	ball bearing
Air Flow:	air exhaust over struts
Options:	• tachometer; • locked rotor alarm signal; • PWM speed control; • conformal coating; • encapsulated motor (IP68)



Model No.	Rated Voltage	Current A			Speed	Air Volume		Max. Static Pressure (H_2O)		Sound Noise	Weight
	VDC	12	24	48	RPM	M^3/Min.	CFM	MM	INCH	dbA	g
MS9225L-S	12/24/48	0.10	0.06	0.04	2,500	1.17	41.3	3.12	0.12	33	102
MS9225M-S	12/24/48	0.27	0.13	0.07	3,500	1.65	58.1	5.58	0.22	43	102
MS9225H-S	24/48	-	0.20	0.12	4,500	2.08	73.6	8.57	0.34	49	102

*Additional performance levels available, contact Mechatronics for more options