




Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

NOTES:  
Current Rating: 5.0AMP  
Contact Resistance: 25mΩ Max  
Withstand Voltage: 1000V AC/DC  
Insulation Resistance: 5000MΩ Min  
Operation Temperature: -55°C to +105°C


Contact Material: Brass  
Contact plating: Au Or Sn over Ni  
Insulator Material: PBT+30%G.F UL94V-0  
Shell Material: Spcc, Plating: Ni Plated  
Rivet/ Harpoon: Brass, Sn over Ni  
Screw: Brass, Plating Ni Plated

## Ordering Information

6200- X 15 F X 15 M X XX X X  
 Dim of Dual Port Center A=15.88mm  
 Center B=19.05mm  
 Up Port Type Up Port Color Down Port Type  
 F=Female B=Black U=Blue M=Male  
 N=Green  
 Down Port Color  
 B=Black U=Blue N=Green  
 Contact Plating:  
 S0=Gold Flash/Tin  
 S3=10μ Gold/Tin  
 S4=15μ Gold/Tin  
 S5=30μ Gold/Tin  
 SN=Tin  
 Bracket Material  
 O=Zinc Alloy  
 I=SPCC

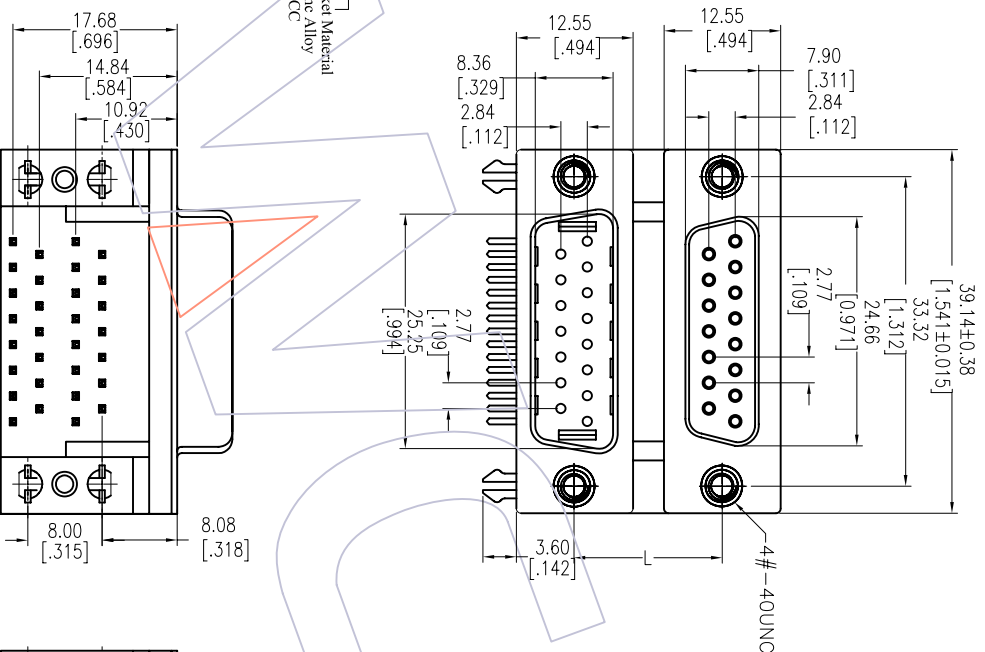

6200-X15FX15MXXX11(WITHOUT SCREW)

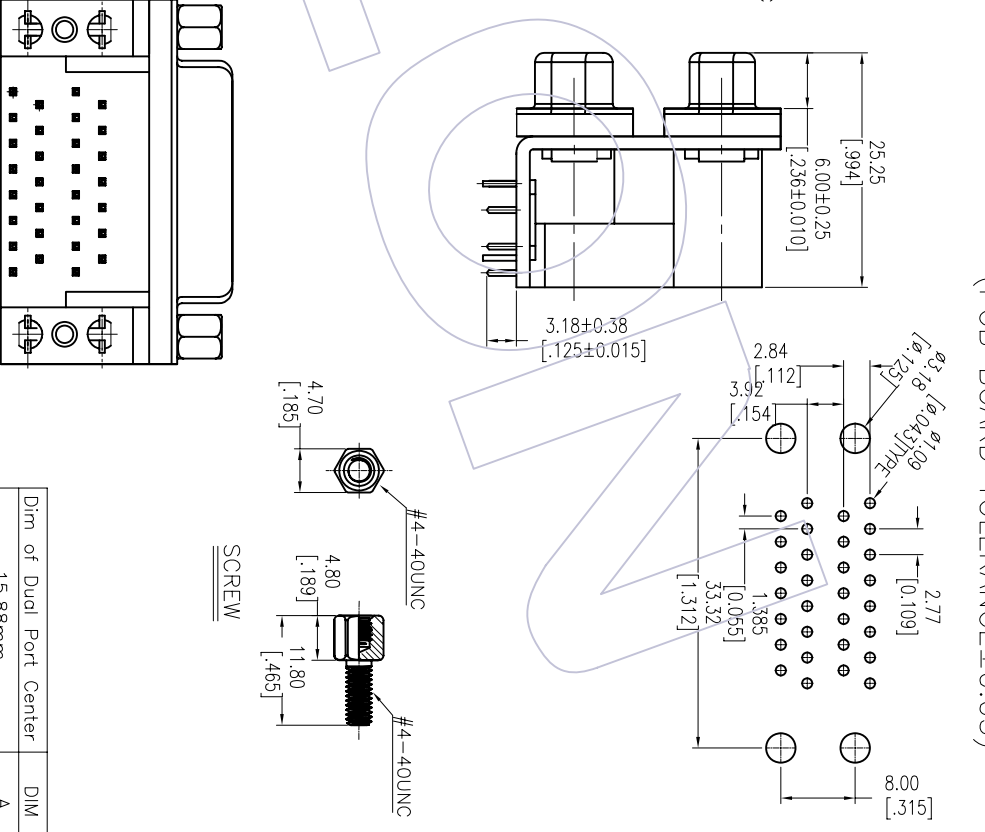

6200-X15FX15MXXX12(WITH SCREW)

Dim of Dual Port Center	DIM L
15.88mm	A
19.05mm	B

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2013/01/10	NEW	-----

OPERATION	DRAW	DATE
XX ±0.40	JYHuang	2013/01/10
XX ±0.25	CHECK	DATE
XX ±0.15	CHECK	DATE
Angle ± 3'	APPROVE	DATE
DIM TOL		

SCALE	FIT	PART NO.
UNIT mm	A4	6200-X15FX15MXXXXX
SIZE A4	1/1	TITLE: D-SUB Right Angle Connector
SHEET 1/1		Dial I Row
PROJ.		Customer NO.



WCON-Dongguan  
 Http: www.wcon.com  
 WCON-Kunshan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com