
MATERIALS	
BODY	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
BNC INSULATOR	PTFE
F INSULATOR	POLYPROPYLENE

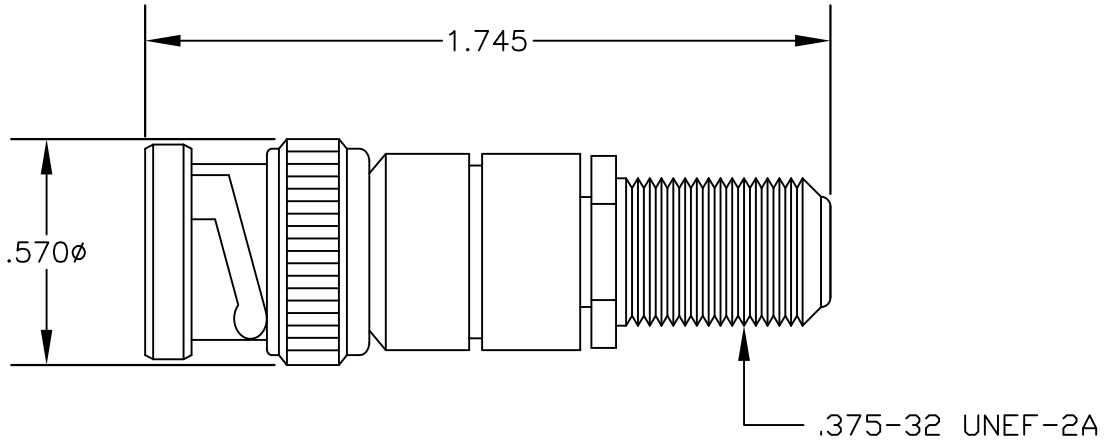

SPECIFICATIONS

FREQUENCY RANGE: DC TO 3 GHz
MAX VSWR 1.30:1

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

COAXIAL & FIBER OPTICS

DWG TITLE	DES.				
PE9741	75 OHM BNC MALE TO F FEMALE				
SIZE A	FSCM NO. 53919	CAD FILE 050703	SCALE N/A		127

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.